


Version

A

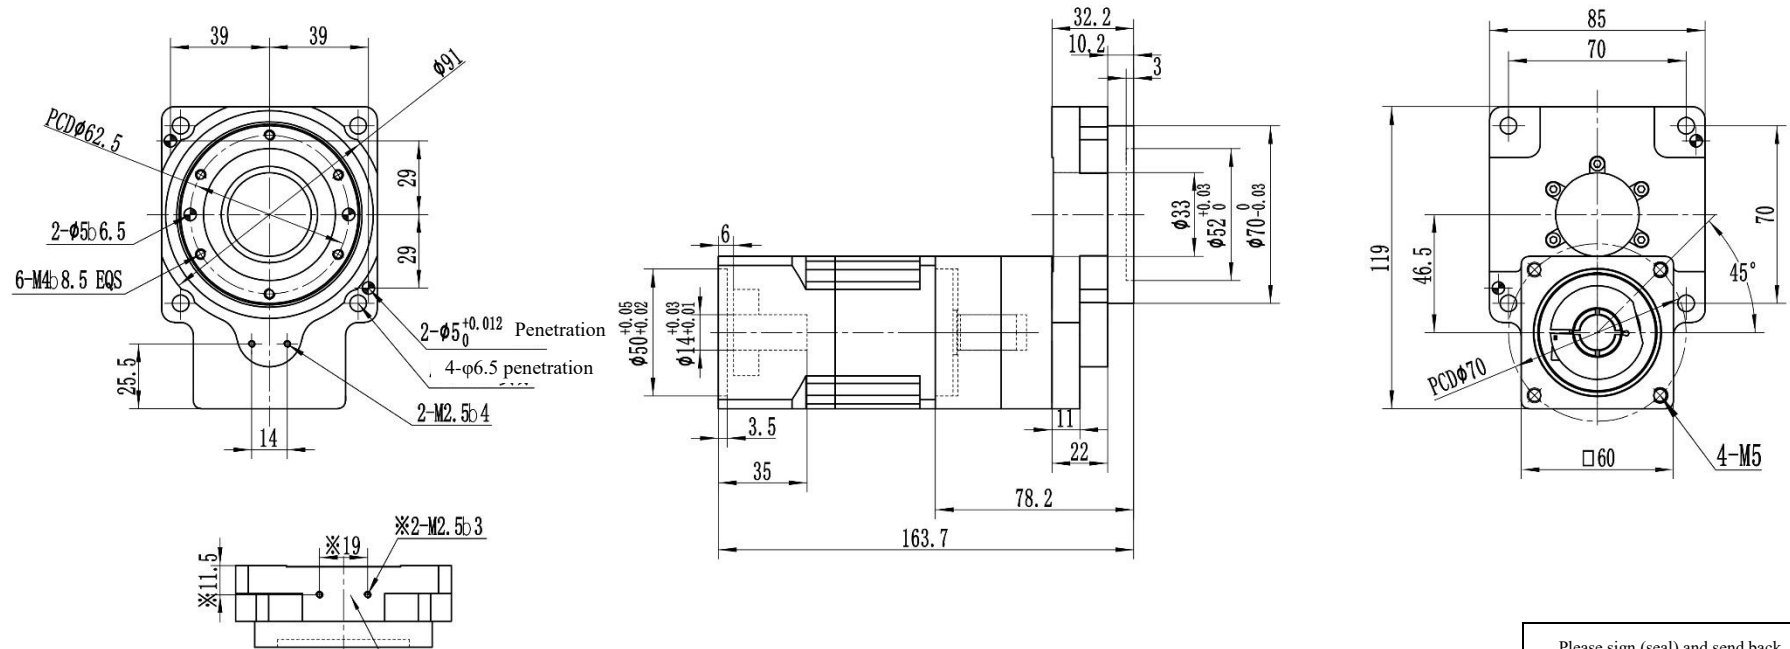

Reduction ratio: 50 (5+10)
Hollow rotating platform reduction ratio: 5
Planetary reducer reduction ratio: 10
Permissible output torque: 12N.m
Permissible output speed: 200RPM
Permissible axial load: 500N
Positioning accuracy: $\leq 8\text{arc min}$
Platform end face runout: 0.01mm

Notes:

The installation screws of the side induction switch must be M2.5*5 screws or M2.5*6 screws+flat washers. Otherwise, there may be a risk of not locking tightly or damaging the reducer gear!

		Please sign (seal) and send back		
	Rework	Hollow rotating platform		
	Rework			
	Rework	Angle of view		
	Rework	Stage mark	Weight	Scale
Material name	Processing method			1:1.8
10280Non-standard information bar		Page of		



KAIFULL TECHNOLOGY

YKW85K-50V2

*Continuous service life: 10000h