Version A

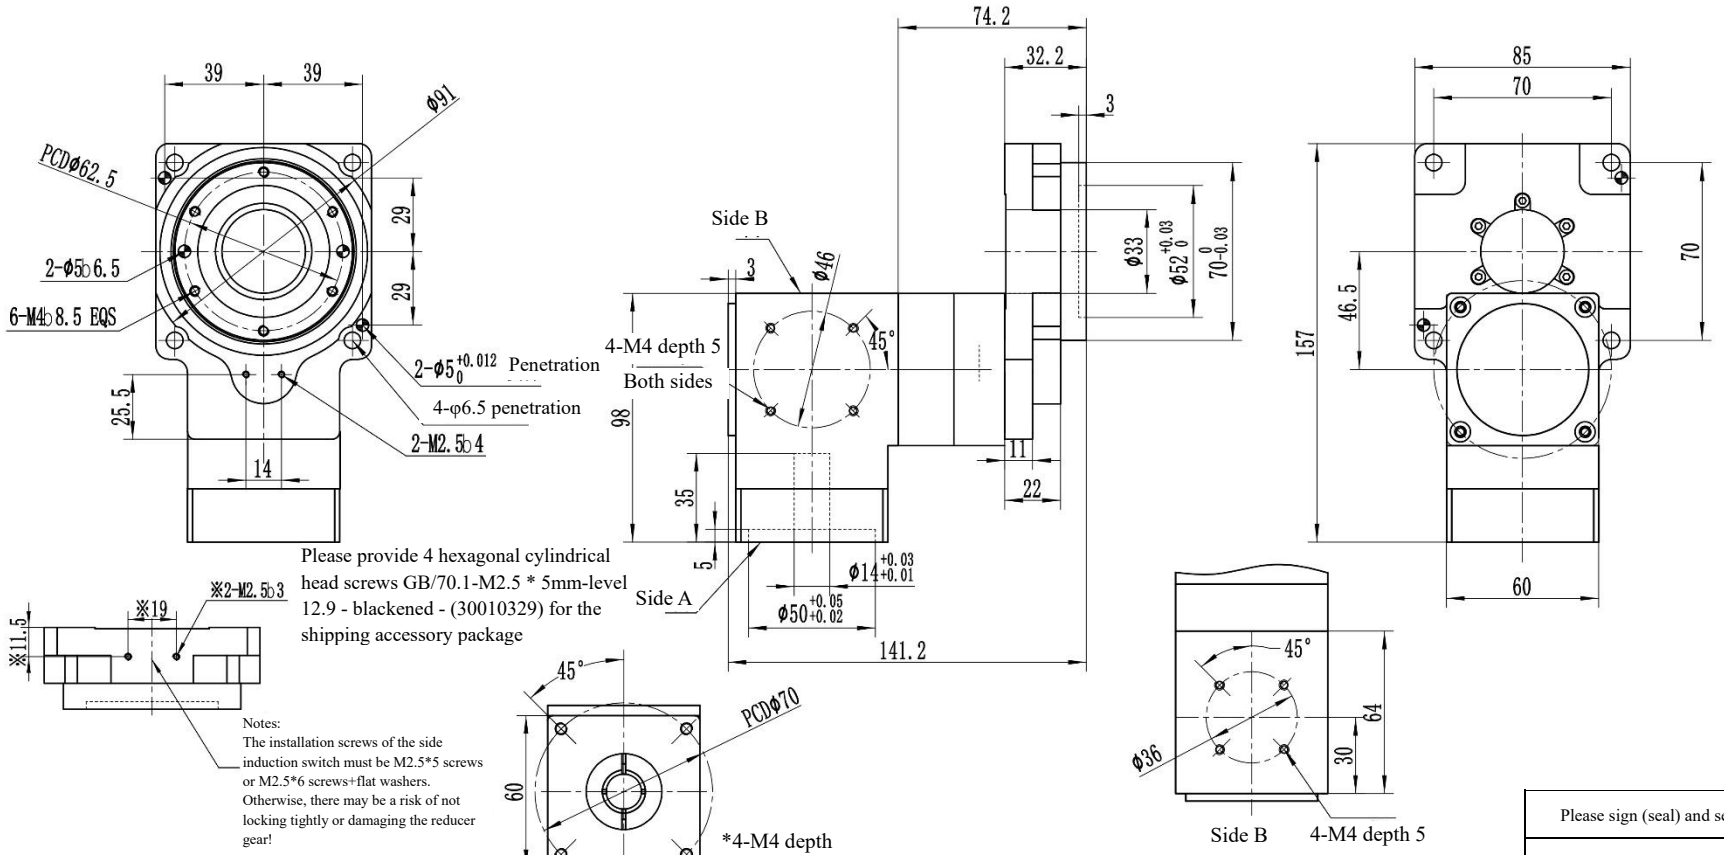

Notes:
The installation screws of the side induction switch must be M2.5*5 screws or M2.5*6 screws+flat washers. Otherwise, there may be a risk of not locking tightly or damaging the reducer gear!

Ratio: 20(10+2)
Rated output torque: 10Nm
Rated output speed: 200rpm
Allowable axial load :500N
Reset positioning precision: ±15arc. sec
Parallelism:≤0. 02mm
Concentricity:≤0.015mm
Noise :≤65dB
Protection Level:IP40

*Continuous service life: 10000h

	Rework	Hollow rotating platform			KAIFULL TECHNOLOGY
	Rework				
	Rework	Angle of view			YKW85R-20V2
	Rework	Stage mark	Weight	Scale	
				1:1.8	
Material name	Processing method				
10280Non-standard information bar		Page of			

Please sign (seal) and send back