

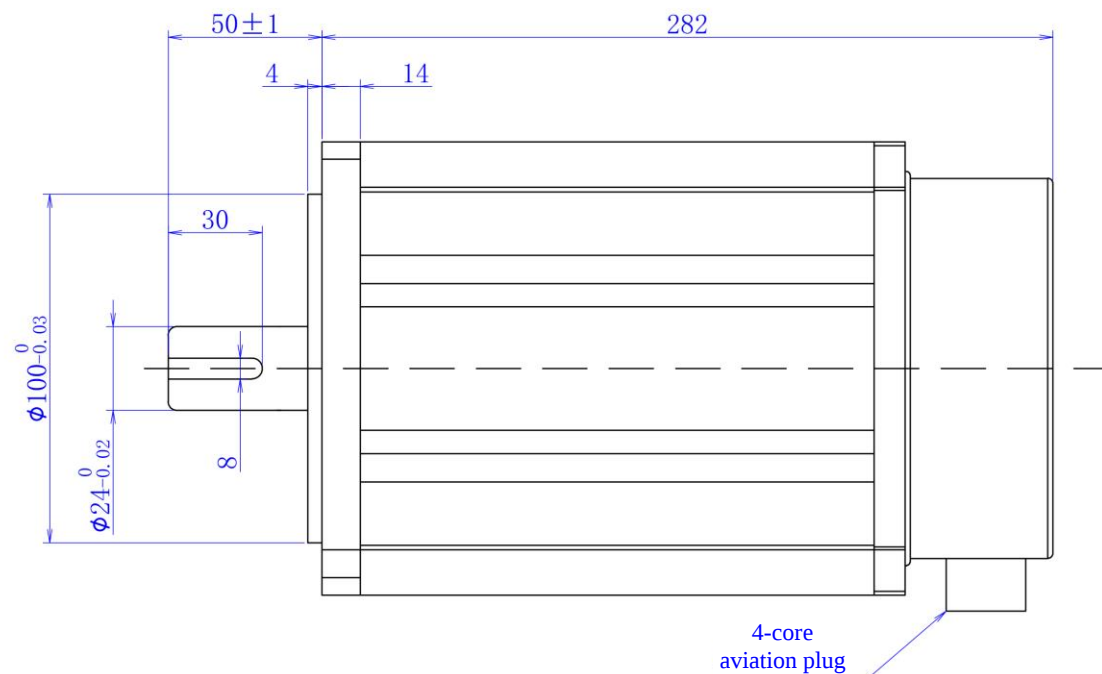


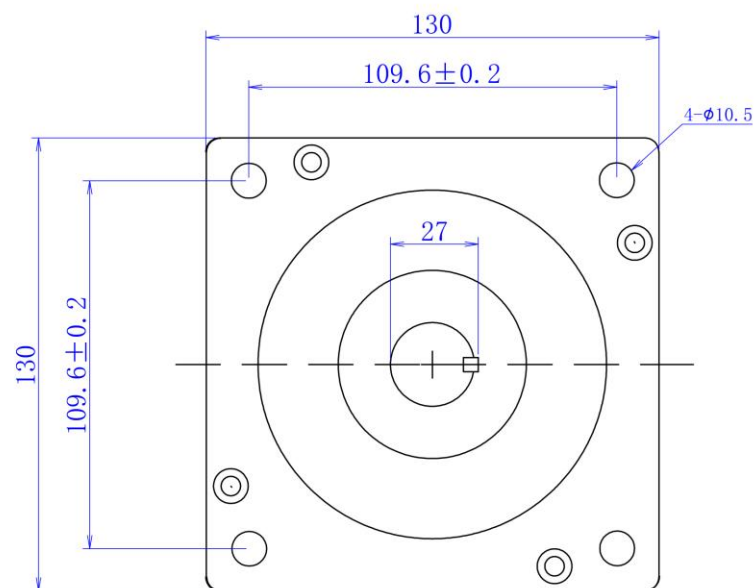

General parameters & standard parameters

Step angle	1.2°
Number of phases	3
Insulation resistance	100MΩmin.(1500V AC)
Insulation level	Class B
Moment of inertia	47.3Kg.cm ²
Weight	21kg
AC drive voltage	220V
Rated current	6.8A
Phase resistance	1.08Ω±10%
Phase inductance	18.3mH±20%
Holding torque	50N.m
--	--

Wiring Diagram



MATERIAL	---	2							
		1							
FINISH	---	0	20-12-13	---		00 First version	Xu Yuanhao		KST-130E4-0001
		SYM	DATE	REVISION NO.	REVISIONS	BY	NOTE		
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	FREE	TITLE	MOTR SPECIFICATION	THIRD ANGLE PROJECTION	
Dongguan Kaifull 20-12-13 Xu Yuanhao	Dongguan Kaifull 20-12-13 Xu Yuanhao					DWG.NO.	Y-20-1213-0		
DONGGUANG KAIFULL CO.,LTD.							SHEET	1/1	