


Parameter	
Step angle	1.8°
Number of phases	2
insulation resistance	100MΩ min.
Insulation level	Class B
Moment of inertia	3g. cm ²
driving voltage	24V
Rated current	0.5A
Phase resistance	12.5Ω ± 10%
Phase inductance	4.5mH ± 20%
Maintain torque	0.02N.m
Dielectric Strength	500V AC

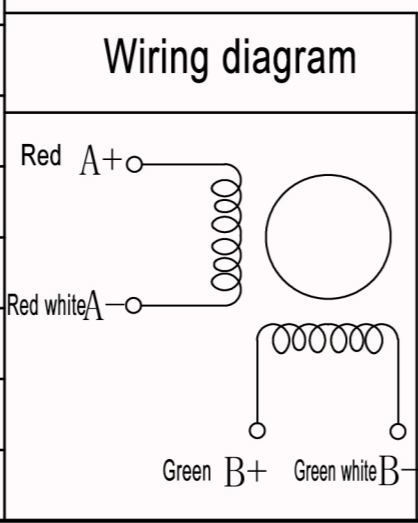

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3							
材质 MATERIAL		2							
表面处理 FINISH		1	24-05-22	---	编码器变更	雷裕元			KST-20D25-E-0004
		0	20-10-13	---	00初版	许元好			
制图 DRAWN	设计 DESIGNED	检图 CHECKED	检印 CHECKED	比例 SCALE	品名 TITLE	变更事项 REVISIONS	设计 BY	备注 NOTE	
凯福科技 20-10-13 许元好	凯福科技 20-10-13 许元好			FREE	电机规格书 MOTR SPECIFICATION				
					图号 DWG. NO.	Y-20-1013-0			
广东凯福电子科技有限公司 GUANGDONG KAIFULL CO., LTD.								页 SHEET	1/1