
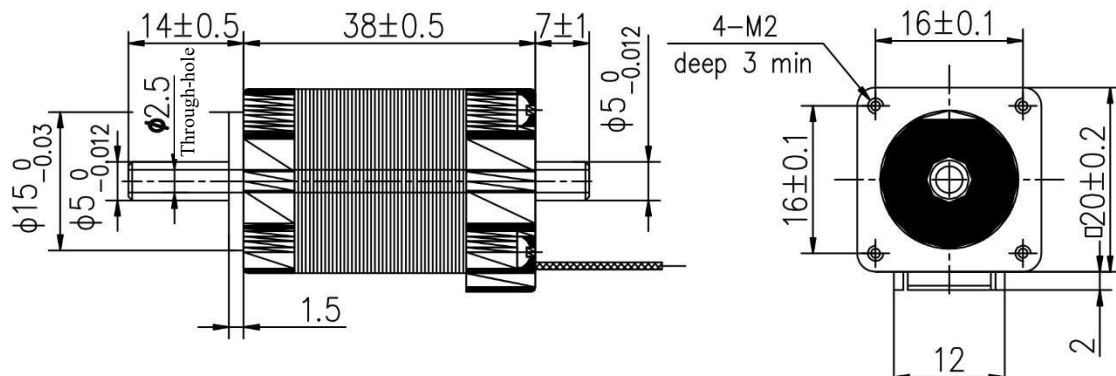
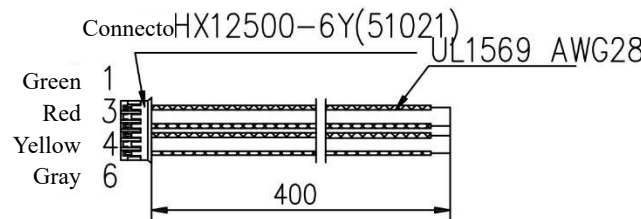


A	1		2		3		4		
	General technical parameters		Electrical technical parameters		Wiring Diagram				
	Stepping angle	1.8°	Rated voltage	24V DC					
	Number of phases	2	Rated current	0.6A					
	Insulation resistance	100MΩMIN(500V DC)	Resistance	9±15%Ω					
	Insulation level	Class B/winding	Inductance	3±20% mH					
	Weight	About 80g	Holding torque	22mN.m					
Braking torque	4mN.m REF.	Moment of inertia	About 3g.cm²						
Overall dimension: unit=mm									
B									
	Note: The accuracy of φ2.5 through-hole is not guaranteed, and it is only used for ventilation.								
C									
D	TOLERANCES (EXCEPT AS NOTES)		±0.3						
	MATERIAL	----						KST-20D25-ZK-0002	
	FINISH	----							
			SYM	DATE	REVISION NO.	REVISIONS	BY	NOTE	
	DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	1:1	TITLE	MOTR SPECIFICATION	THIRD ANGLI PROJECTION
	Dongguan Kaifull 20-07-27 Xu Yuanhao	Dongguan Kaifull 20-07-27 Xu Yuanhao					DWG.NO.	Y-20-0727-0	
	Guangdong Kaifull Electronics Technology Co., Ltd.							SHEET	1/1