



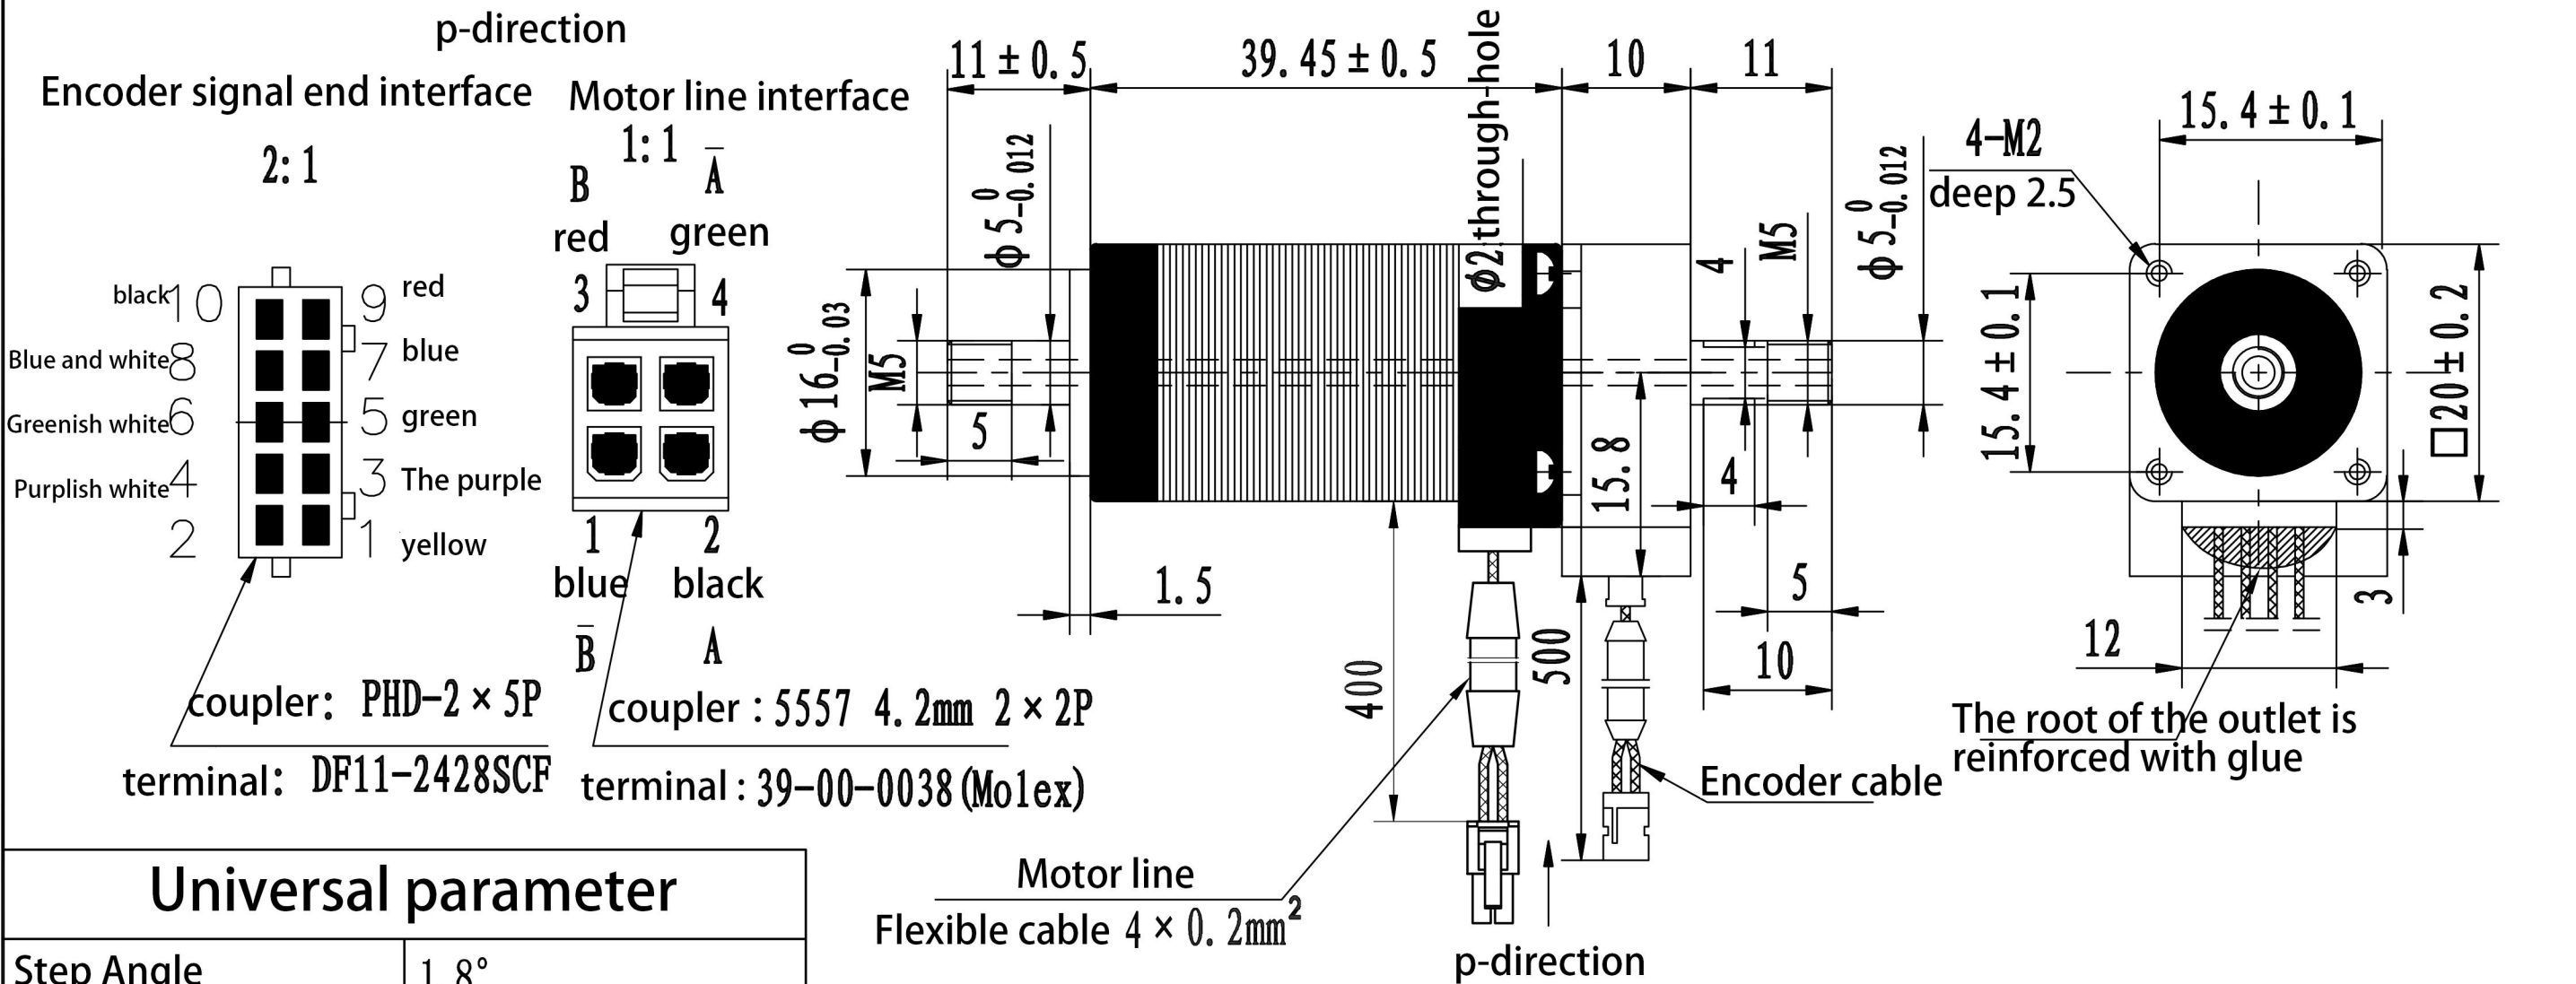

Universal parameter

Step Angle	1.8°
Phase number	2
Insulation resistance	100MΩ _{min.} (500V DC)
Insulation class	Class B
Moment of inertia	3g. cm ²
weight	0.08kg
Driving voltage	24V
Rated current	0.6A
Phase resistance	6Ω ± 10%
Phase inductance	2mH ± 20%
Holding torque	32mN. m
Positioning torque	4mN. m

Wiring diagram

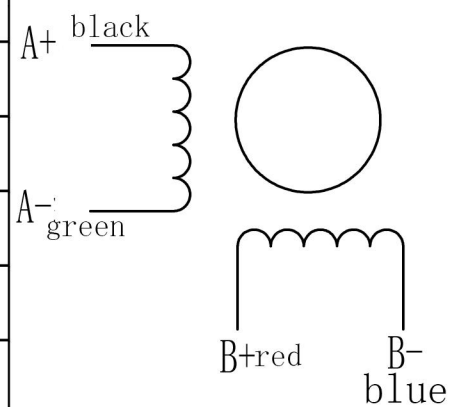

Note :1 motor shaft Φ2 through hole does not guarantee the concentricity, only for ventilation.

材 质 MATERIAL	—	2							
表面处理 FINISH	—	1							
制 图 DRAWN	设计 DESIGNED	检 图 CHECKED	检 印 CHECKED	比例 SCALE	FREE	品 名 TITLE	电机规格书 MOTR SPECIFICATION		
凯福科技 '22-06-22 许元好	凯福科技 '22-06-22 许元好					图 号 DWG. NO.	Y-22-0622-0		
广东凯福电子科技有限公司 GUANGDONG KAIFULL CO., LTD.						页 SHEET	1/2		