

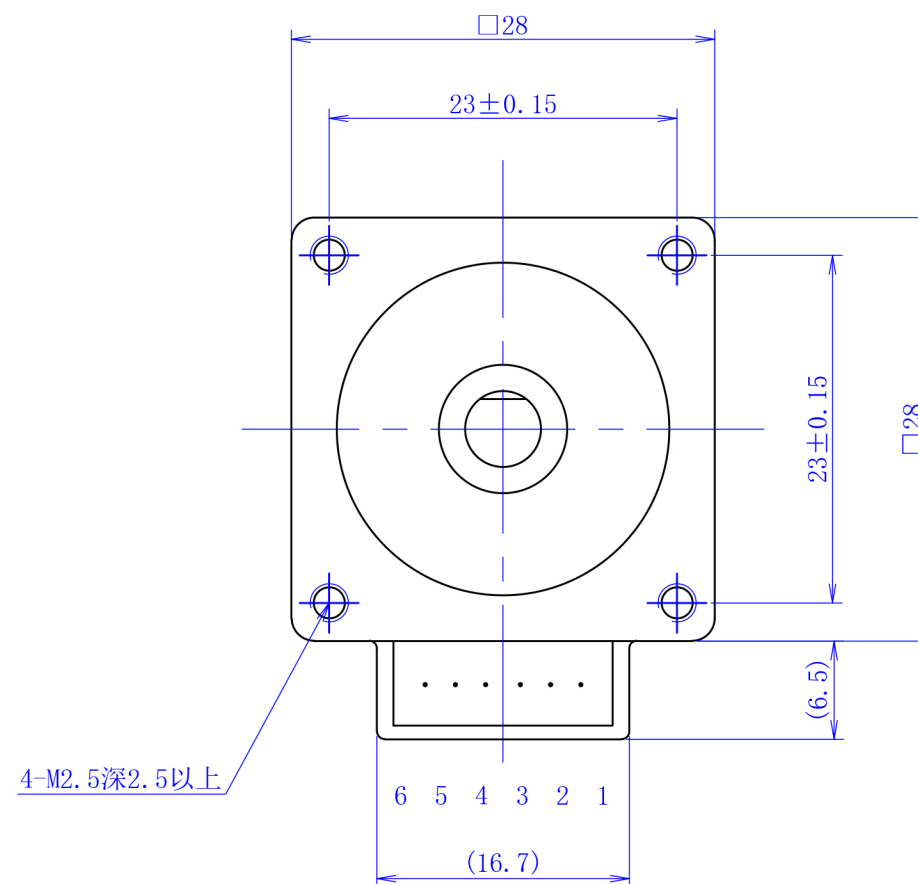


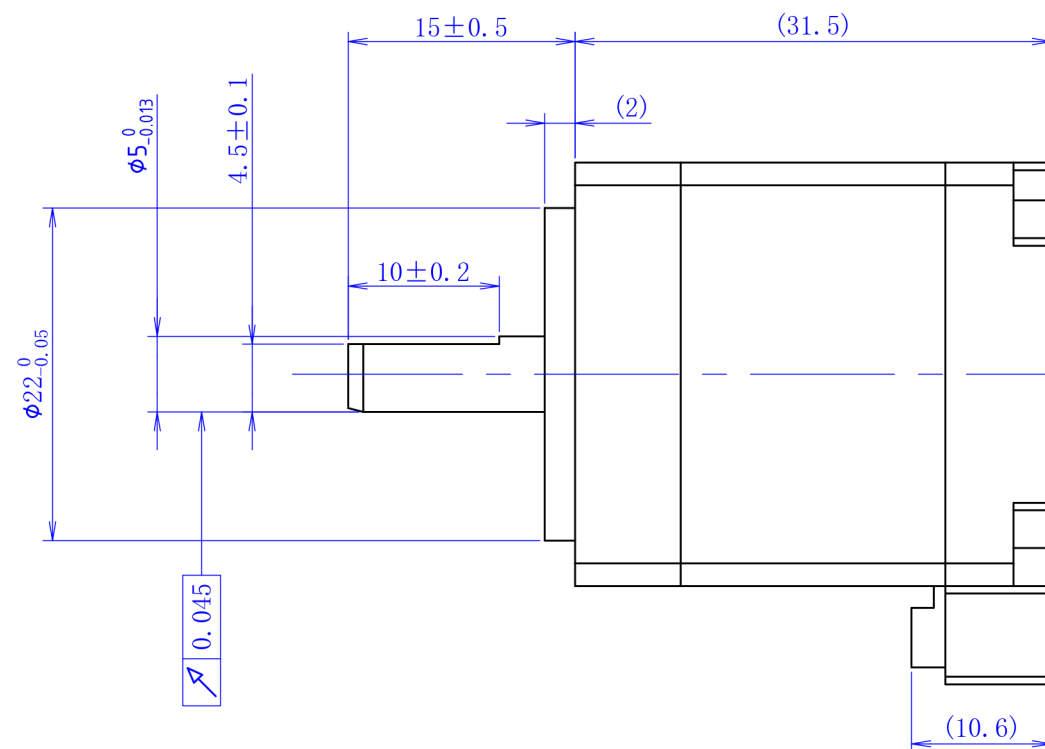


terminal:	MOLEX 50212-8000
Rubber shell:	MOLEX 51065-0600

UL1569 AWG26

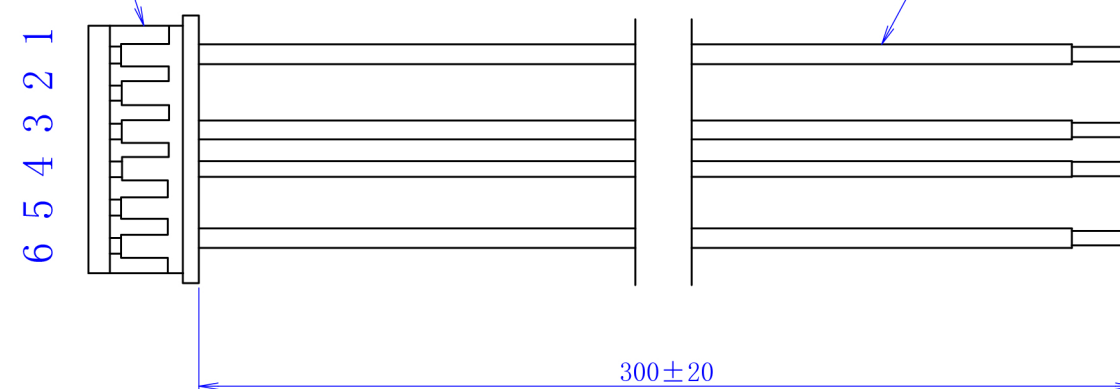

Universal parametera	
Step Angle	1.8°
Phase number	2相
Insulation resistance	100MΩmin. (500V DC)
Insulation class	Class B
Insulation withstand voltage	500V A.C 1分钟
Rated current	0.7A
Phase resistance	4.5Ω±10% AT25°
Phase inductance	3.2mH±20% AT 1KHz, 1Vrms
Holding torque	60mN.m
Rotor inertia	9g.cm ²
weight	100g

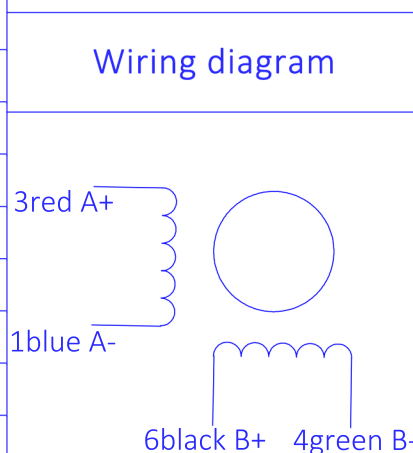

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3							
材 质 MATERIAL		-----							KST-28D18-0001
				01	24-10-14	-----	线材质变更	黎明勇	
表面处理 FINISH		-----		--	24-07-26	-----	00初版	黎明勇	备 注 NOTE
				改版 SYM	年 月 日 DATE	变更票图号 REVISION NO.	变 更 事 项 REVISIONS	设计 BY	
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	确 认 CHECKED	比例 SCALE	2:1	品 名 TITLE	电动机规格书		
凯福科技 24-07-26 黎明勇	凯福科技 24-07-26 黎明勇					图 号 DWG. NO.	213-0191-01		
广东凯福电子科技有限公司 GUANGDONG KAIFULL ELECTRONIC TECHNOLOGY CO., LTD								页 SHEET	1/1