

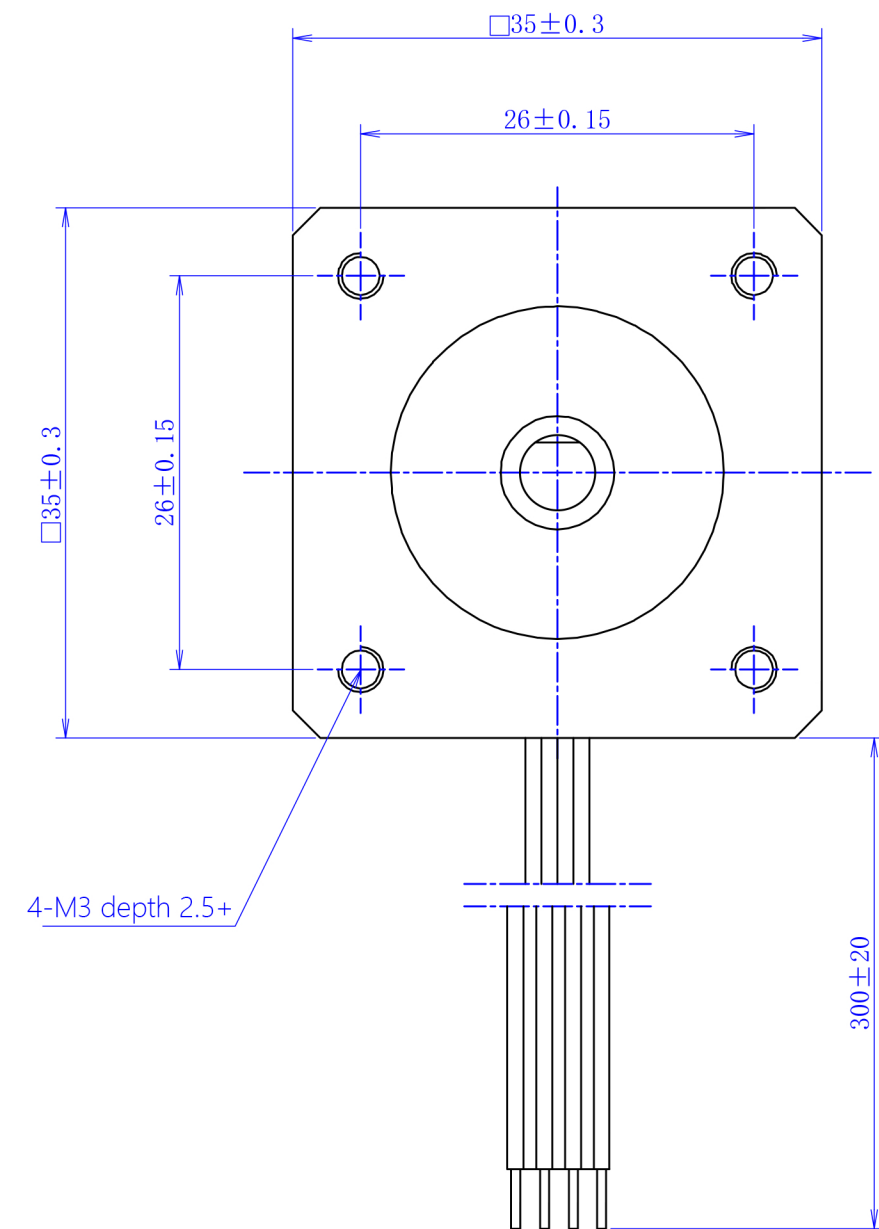


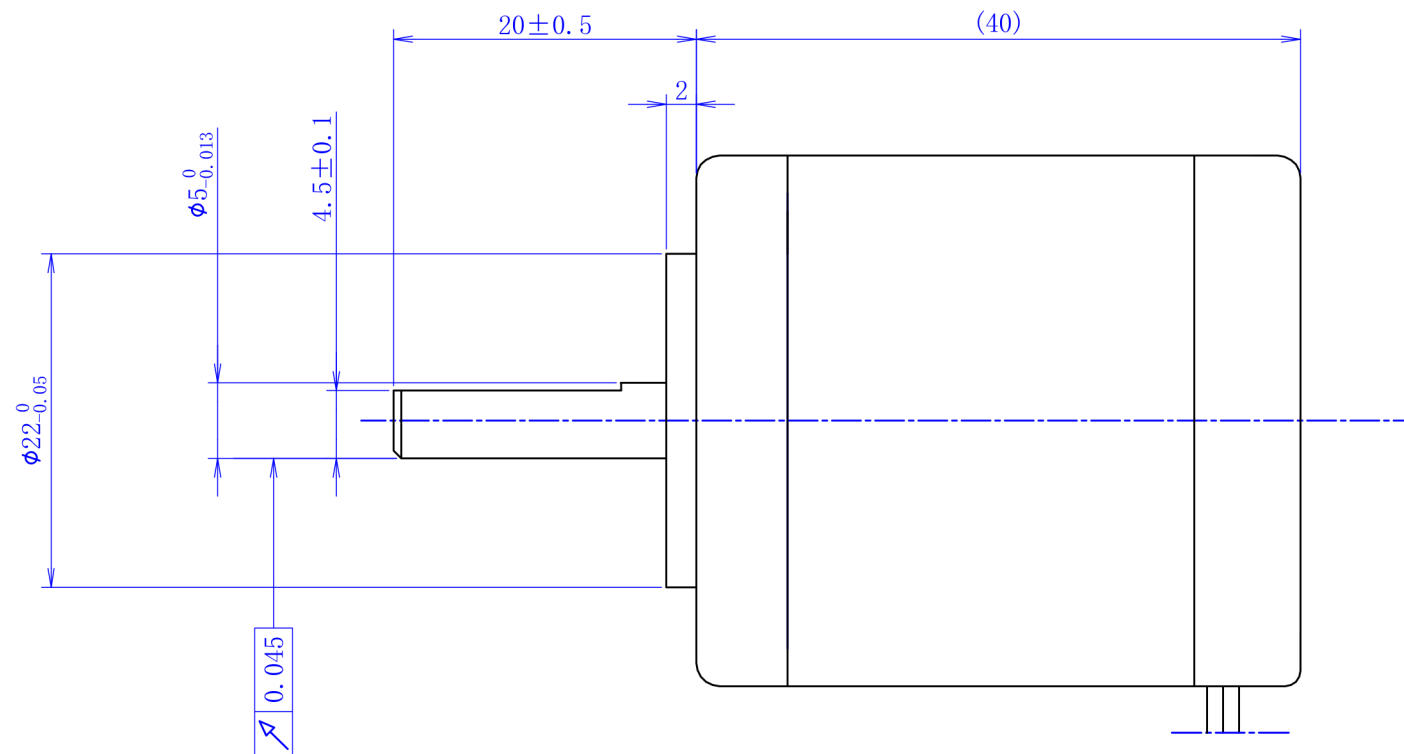

Universal parameter	
Step Angle	1.8°
Phase number	two phase
Insulation resistance	100MΩ min. (500V DC)
Insulation class	Class B
Insulation withstand voltage	500V A.C 1 min
Rated current	1.0A
Phase resistance	4.35Ω ±15% AT25°
Phase inductance	4.7mH±20% AT 1KHz, 1Vrms
Holding torque	0.24N.m
Rotor inertia	35g.cm²
weight	230g

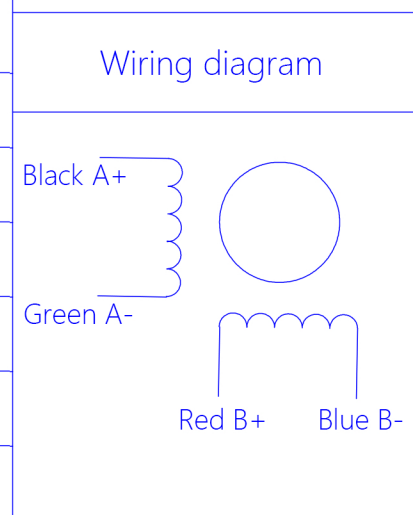

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3										
材 质 MATERIAL		-----							KST-35D26-0001			
表面处理 FINISH		-----		--	24-10-31	-----	00初版					黎明勇
				改版 SYM	年 月 日 DATE	变更票图号 REVISION NO.	变 更 事 项 REVISIONS		设计 BY	备 注 NOTE		
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	确 认 CHECKED	比例 SCALE	1:1	品 名 TITLE	电动机规格书					
						图 号 DWG. NO.	213-0164-00					
				广东凯福电子科技有限公司 GUANGDONG KAIFULL ELECTRONIC TECHNOLOGY CO., LTD							页 SHEET	1/1