

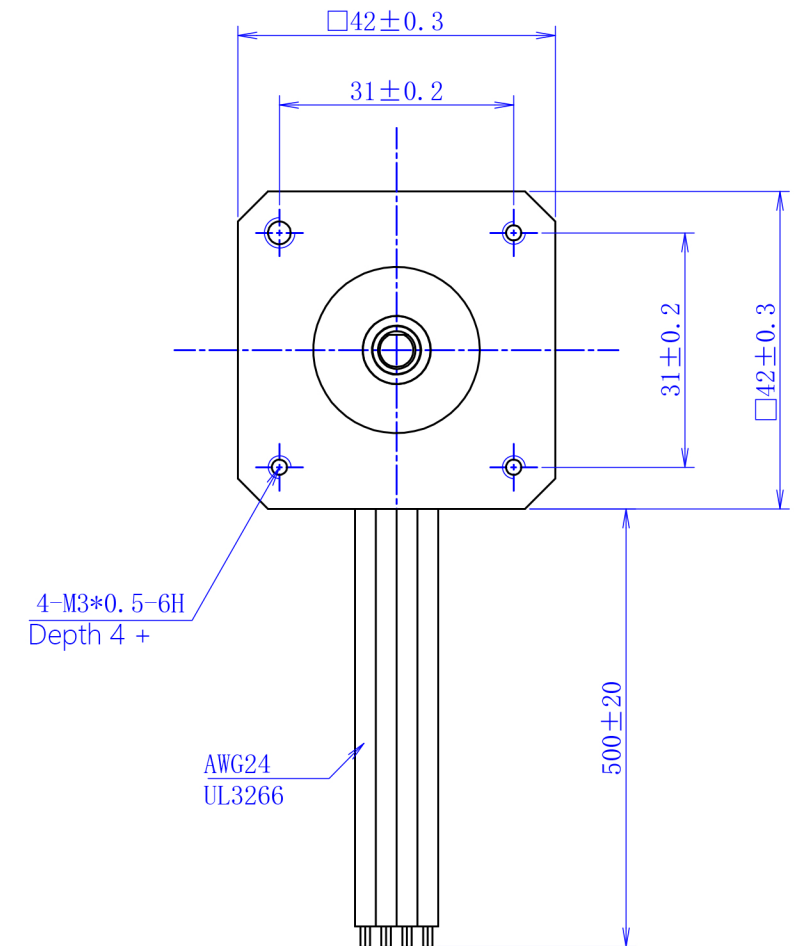
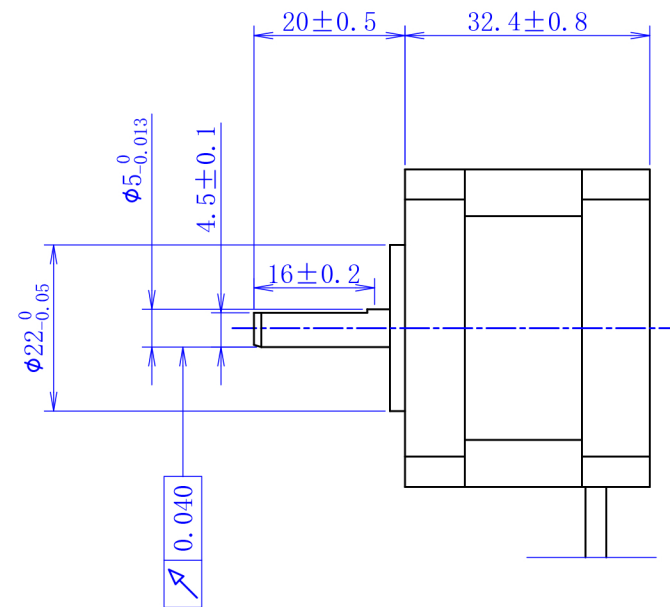


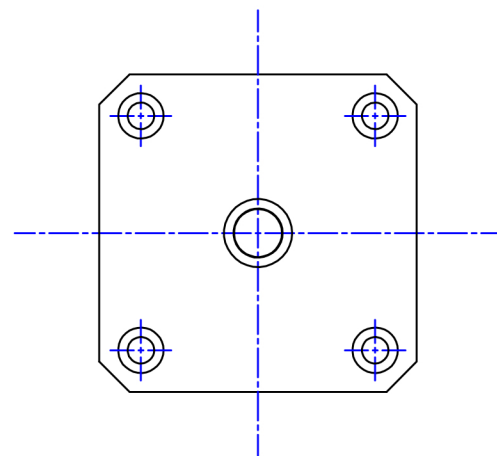

Universal parameter	
Step Angle	1.8°
Phase number	two phase
Insulation resistance	100MΩ _{min.} (500V DC)
Insulation class	Class B
Insulation withstand voltage	500V A.C 1 min
Rated current	0.85A
Phase resistance	5.7Ω ±15% AT25°
Phase inductance	8.1mH±20% AT 1kHz, 1V _{rms}
Holding torque	0.24N.m
Rotor inertia	35g.cm ²
weight	230g

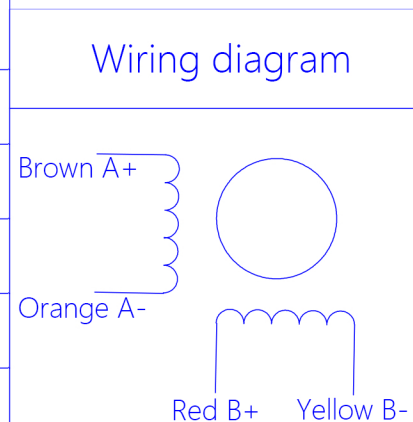

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3					
材 质 MATERIAL		-----					KST-42D16-0001
表面处理 FINISH		-----		-- 24-03-14	-----	00初版	黎明勇
		改版 SYM	年 月 日 DATE	变更票图号 REVISION NO.	变 更 事 项 REVISIONS	设计 BY	备 注 NOTE
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	确 认 CHECKED	比 例 SCALE	1:1	品 名 TITLE	电动机规格书
						图 号 DWG. NO.	213-0144-00
				广东凯福电子科技有限公司 GUANGDONG KAIFULL ELECTRONIC TECHNOLOGY CO., LTD			页 SHEET
							1/1