




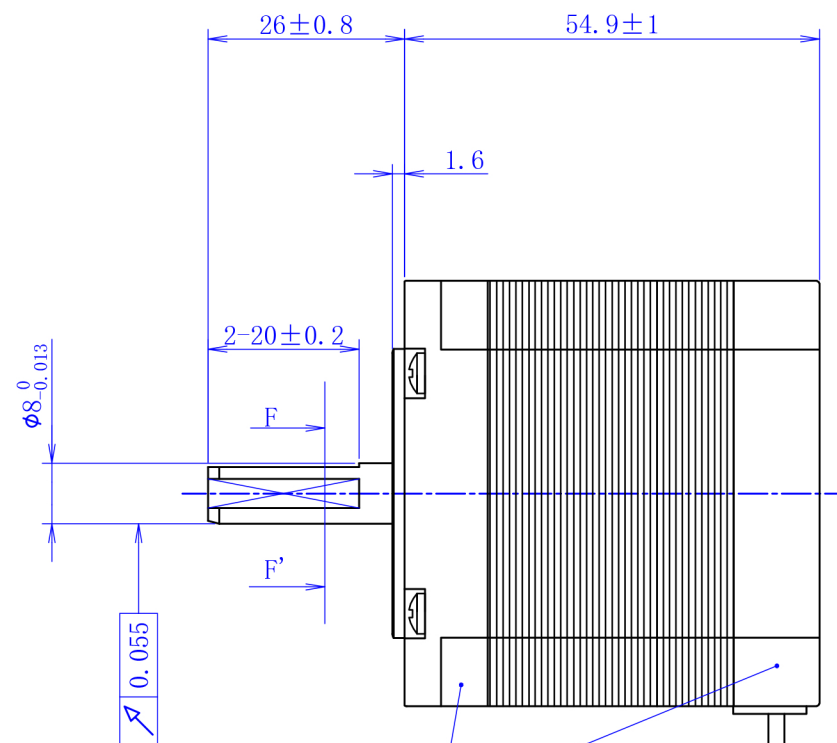

Universal parameter	
Step Angle	1.8°
Phase number	Two phase
Insulation resistance	100MΩmin. (500V DC)
Insulation class	Class B
Insulation withstand voltage	500V A.C 1 min
Rated current	4.2A
Phase resistance	0.45 Ω ±15% AT25°
Phase inductance	1.4mH±20% AT 1KHz, 1Vrms
Holding torque	1.1N.m
Rotor inertia	280g.cm²
weight	600g

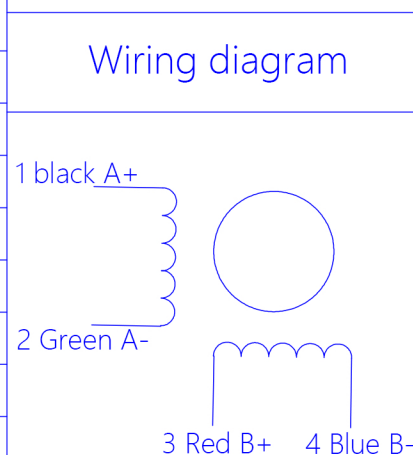

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3										
材 质 MATERIAL		-----		02	24-01-29	-----	电阻和保持力矩变更		黎明勇	KST-57D33-0002		
				01	23-11-09	-----	安装孔径变更		黎明勇			
表面处理 FINISH		-----		--	23-10-19	-----	00初版		黎明勇			
				改版 SYM	年 月 日 DATE	变更票图号 REVISION NO.	变 更 事 项 REVISIONS		设计 BY	备 注 NOTE		
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	确 认 CHECKED	比例 SCALE	1:1	品 名 TITLE	电动机规格书					
 凯福科技 23-10-19 黎明勇	 凯福科技 23-10-19 黎明勇					图 号 DWG. NO.	213-0076-02					
				广东凯福电子科技有限公司 GUANGDONG KAIFULL ELECTRONIC TECHNOLOGY CO., LTD							页 SHEET	1/1