

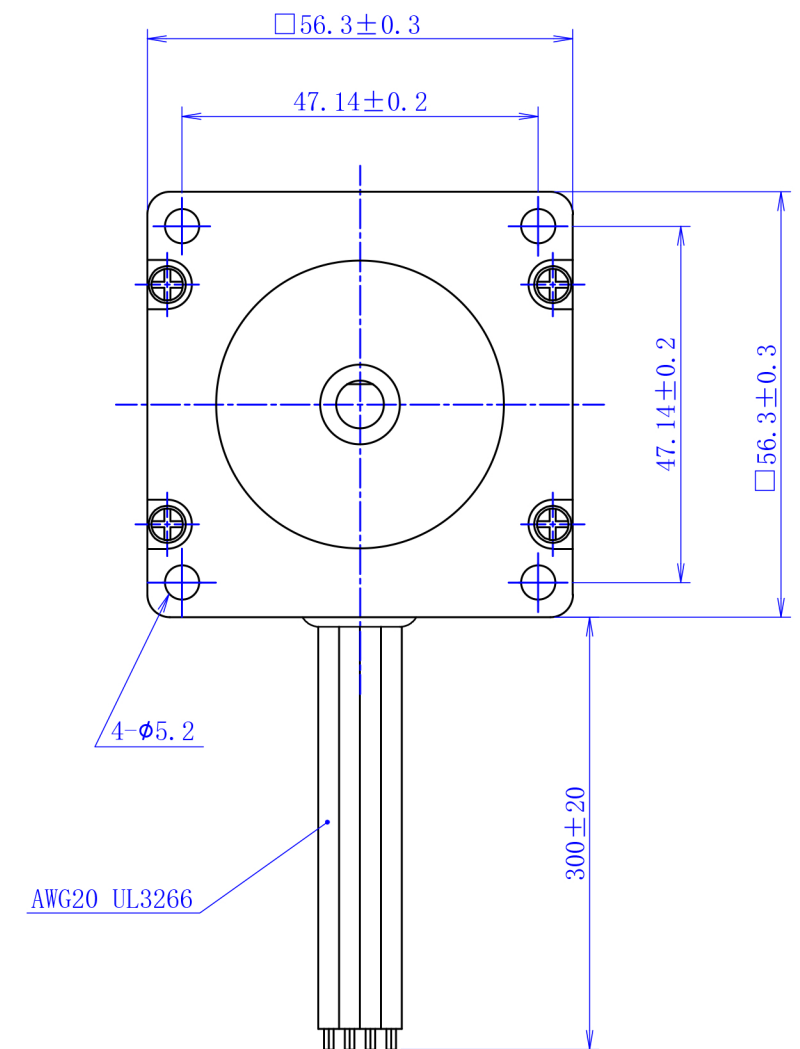
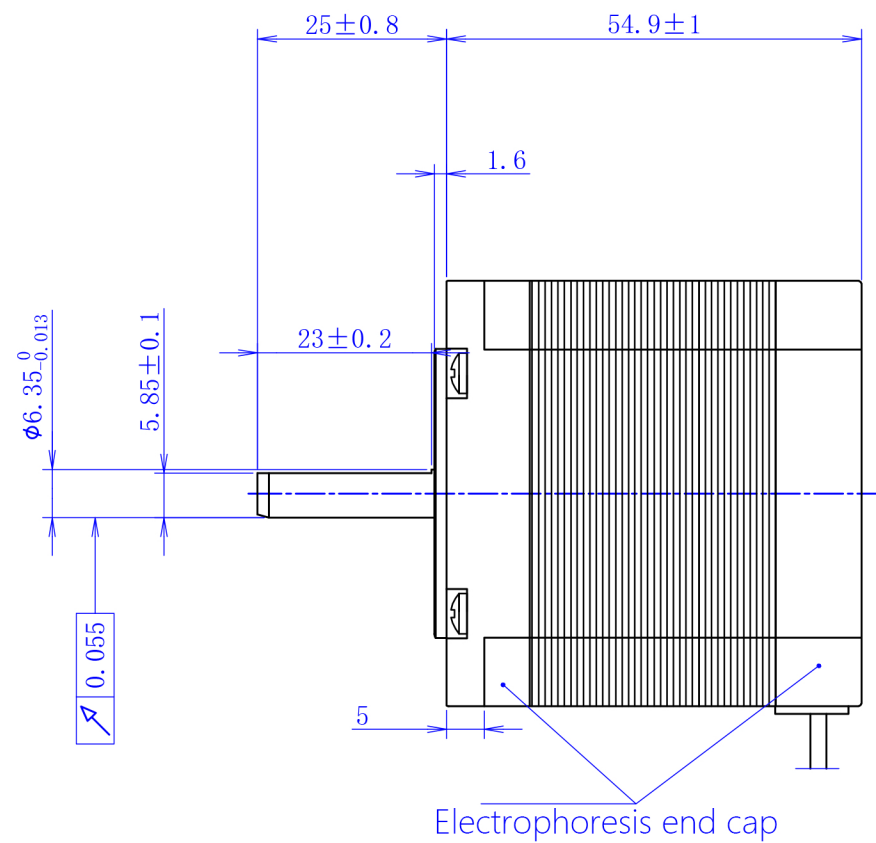


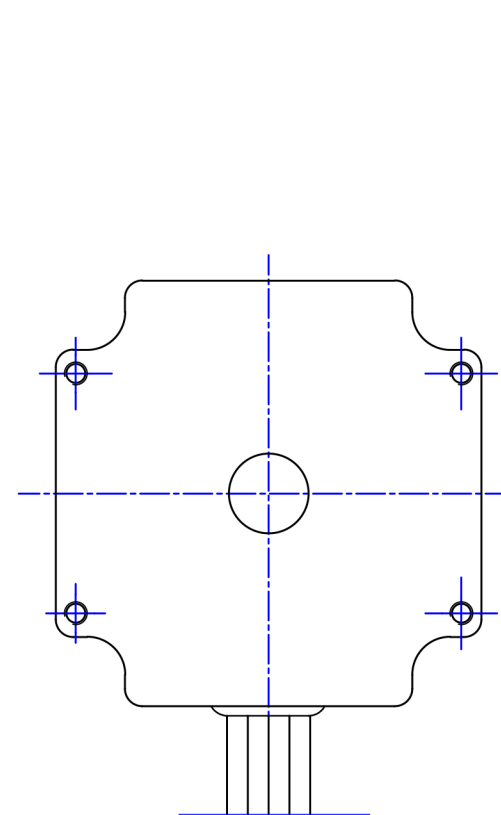

Universal parameter	
Step Angle	1.8°
Phase number	Two phase
Insulation resistance	100MΩmin. (500V DC)
Insulation class	Class B
Insulation withstand voltage	500V A.C 1 min
Rated current	4.2A
Phase resistance	0.4 Ω ±15% AT25°
Phase inductance	1.4mH±20% AT 1KHz, 1Vrms
Holding torque	1.1N. m
Rotor inertia	280g. cm²
weight	600g

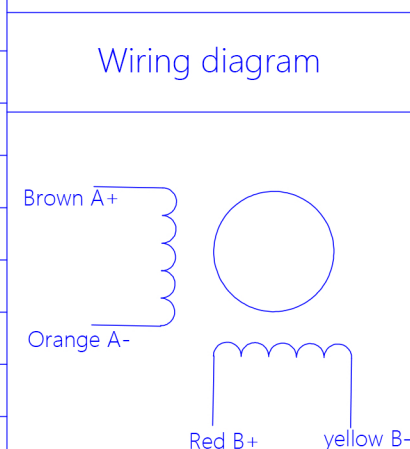

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3							
材 质 MATERIAL		-----							KST-57D33-0005
		01	24-01-30	-----	保持力矩变更		黎明勇		
表面处理 FINISH		-----		--	23-11-23	-----	00初版		黎明勇
		改版 SYM	年 月 日 DATE	变更票图号 REVISION NO.	变 更 事 项 REVISIONS		设计 BY	备 注 NOTE	
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	确 认 CHECKED	比 例 SCALE	1:1	品 名 TITLE	电动机规格书		
						图 号 DWG. NO.	213-0114-01		
				广东凯福电子科技有限公司 GUANGDONG KATFULL ELECTRONIC TECHNOLOGY CO., LTD				页 SHEET	1/1