

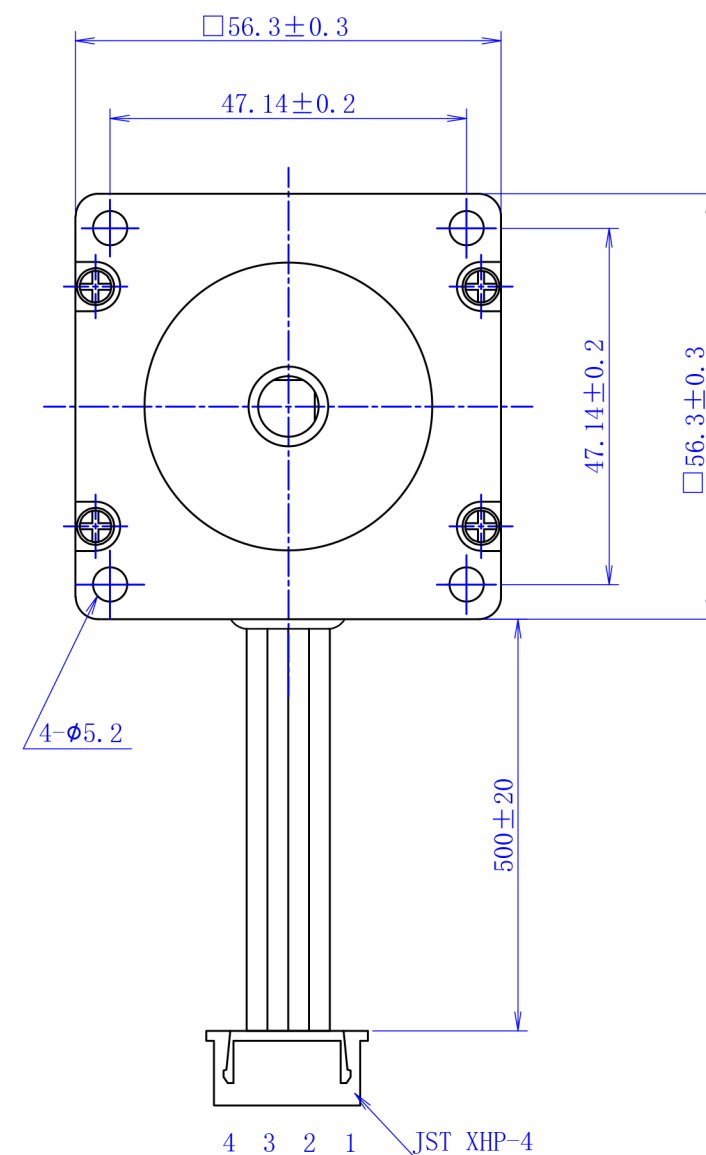
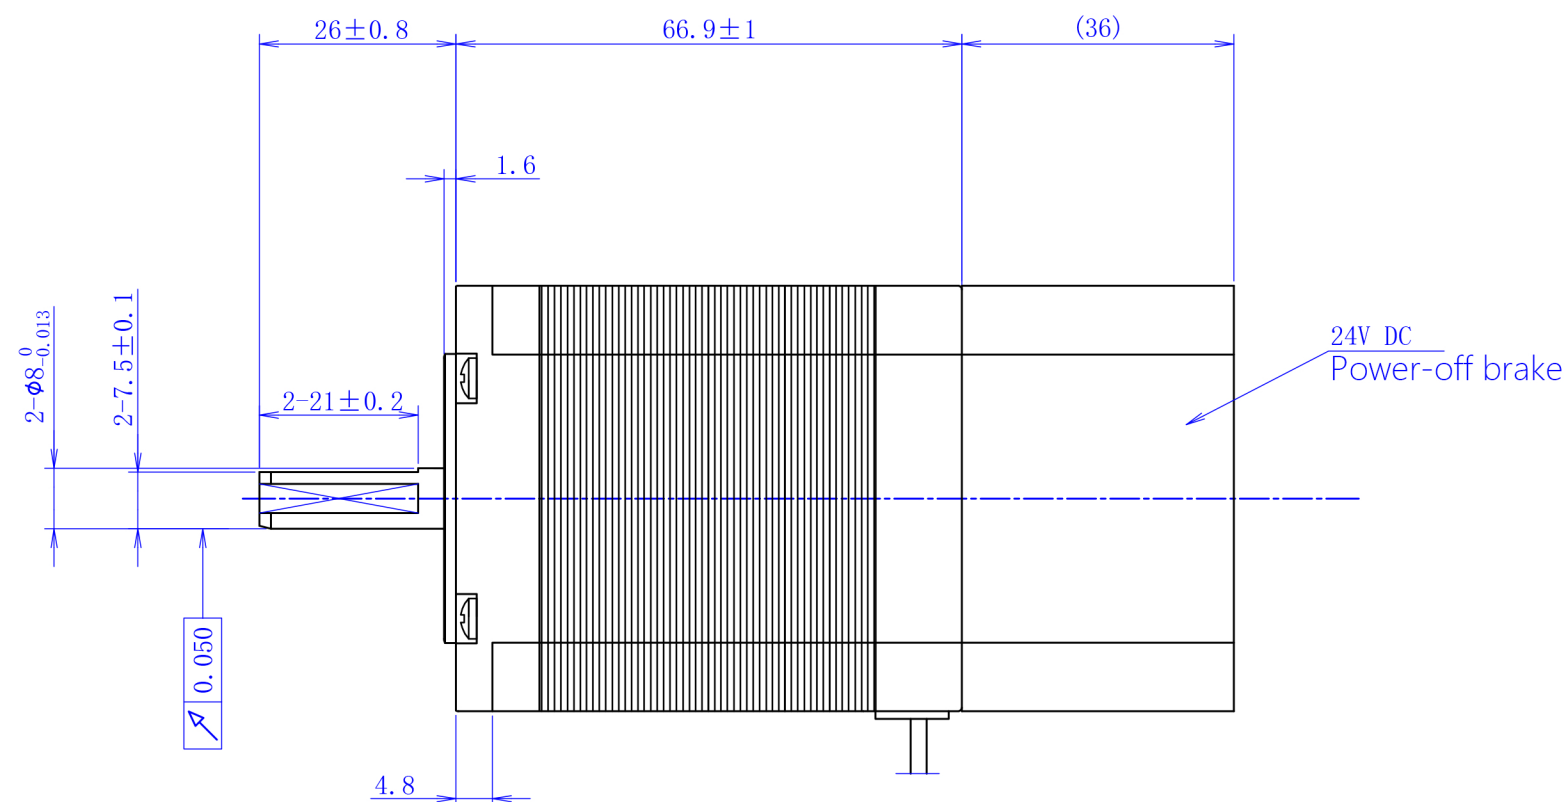


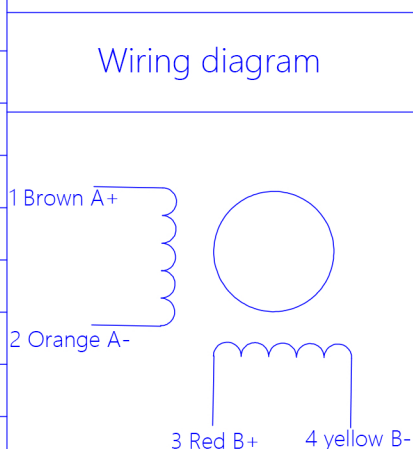

Brake type	Voltage	power	friction torque	response time
Electromagnetic brake	24V DC	4W	1. 3N. M	50mS

Universal parameter	
Step Angle	1.8°
Phase number	Two phase
Insulation resistance	100MΩmin. (500V DC)
Insulation class	Class B
Insulation withstand voltage	500V A.C 1 min
Rated current	4.4A
Phase resistance	0.6Ω ±15% AT25°
Phase inductance	1.5mH±20% AT 1KHz, 1Vrms
Holding torque	1.4N.m
Rotor inertia	330g.cm²
weight	1300g



一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3							
材 质 MATERIAL		-----							KST-57D45-M-0003
表面处理 FINISH		-----		--	24-05-28	-----	00初版	黎明勇	备 注 NOTE
				改版 SYM	年 月 日 DATE	变更票图号 REVISION NO.	变 更 事 项 REVISIONS	设计 BY	
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	确 认 CHECKED	比例 SCALE	1:1	品 名 TITLE	电动机规格书		
						图 号 DWG. NO.	213-0169-00		
				广东凯福电子科技有限公司 GUANGDONG KAIFULL ELECTRONIC TECHNOLOGY CO., LTD				页 SHEET	1/1