



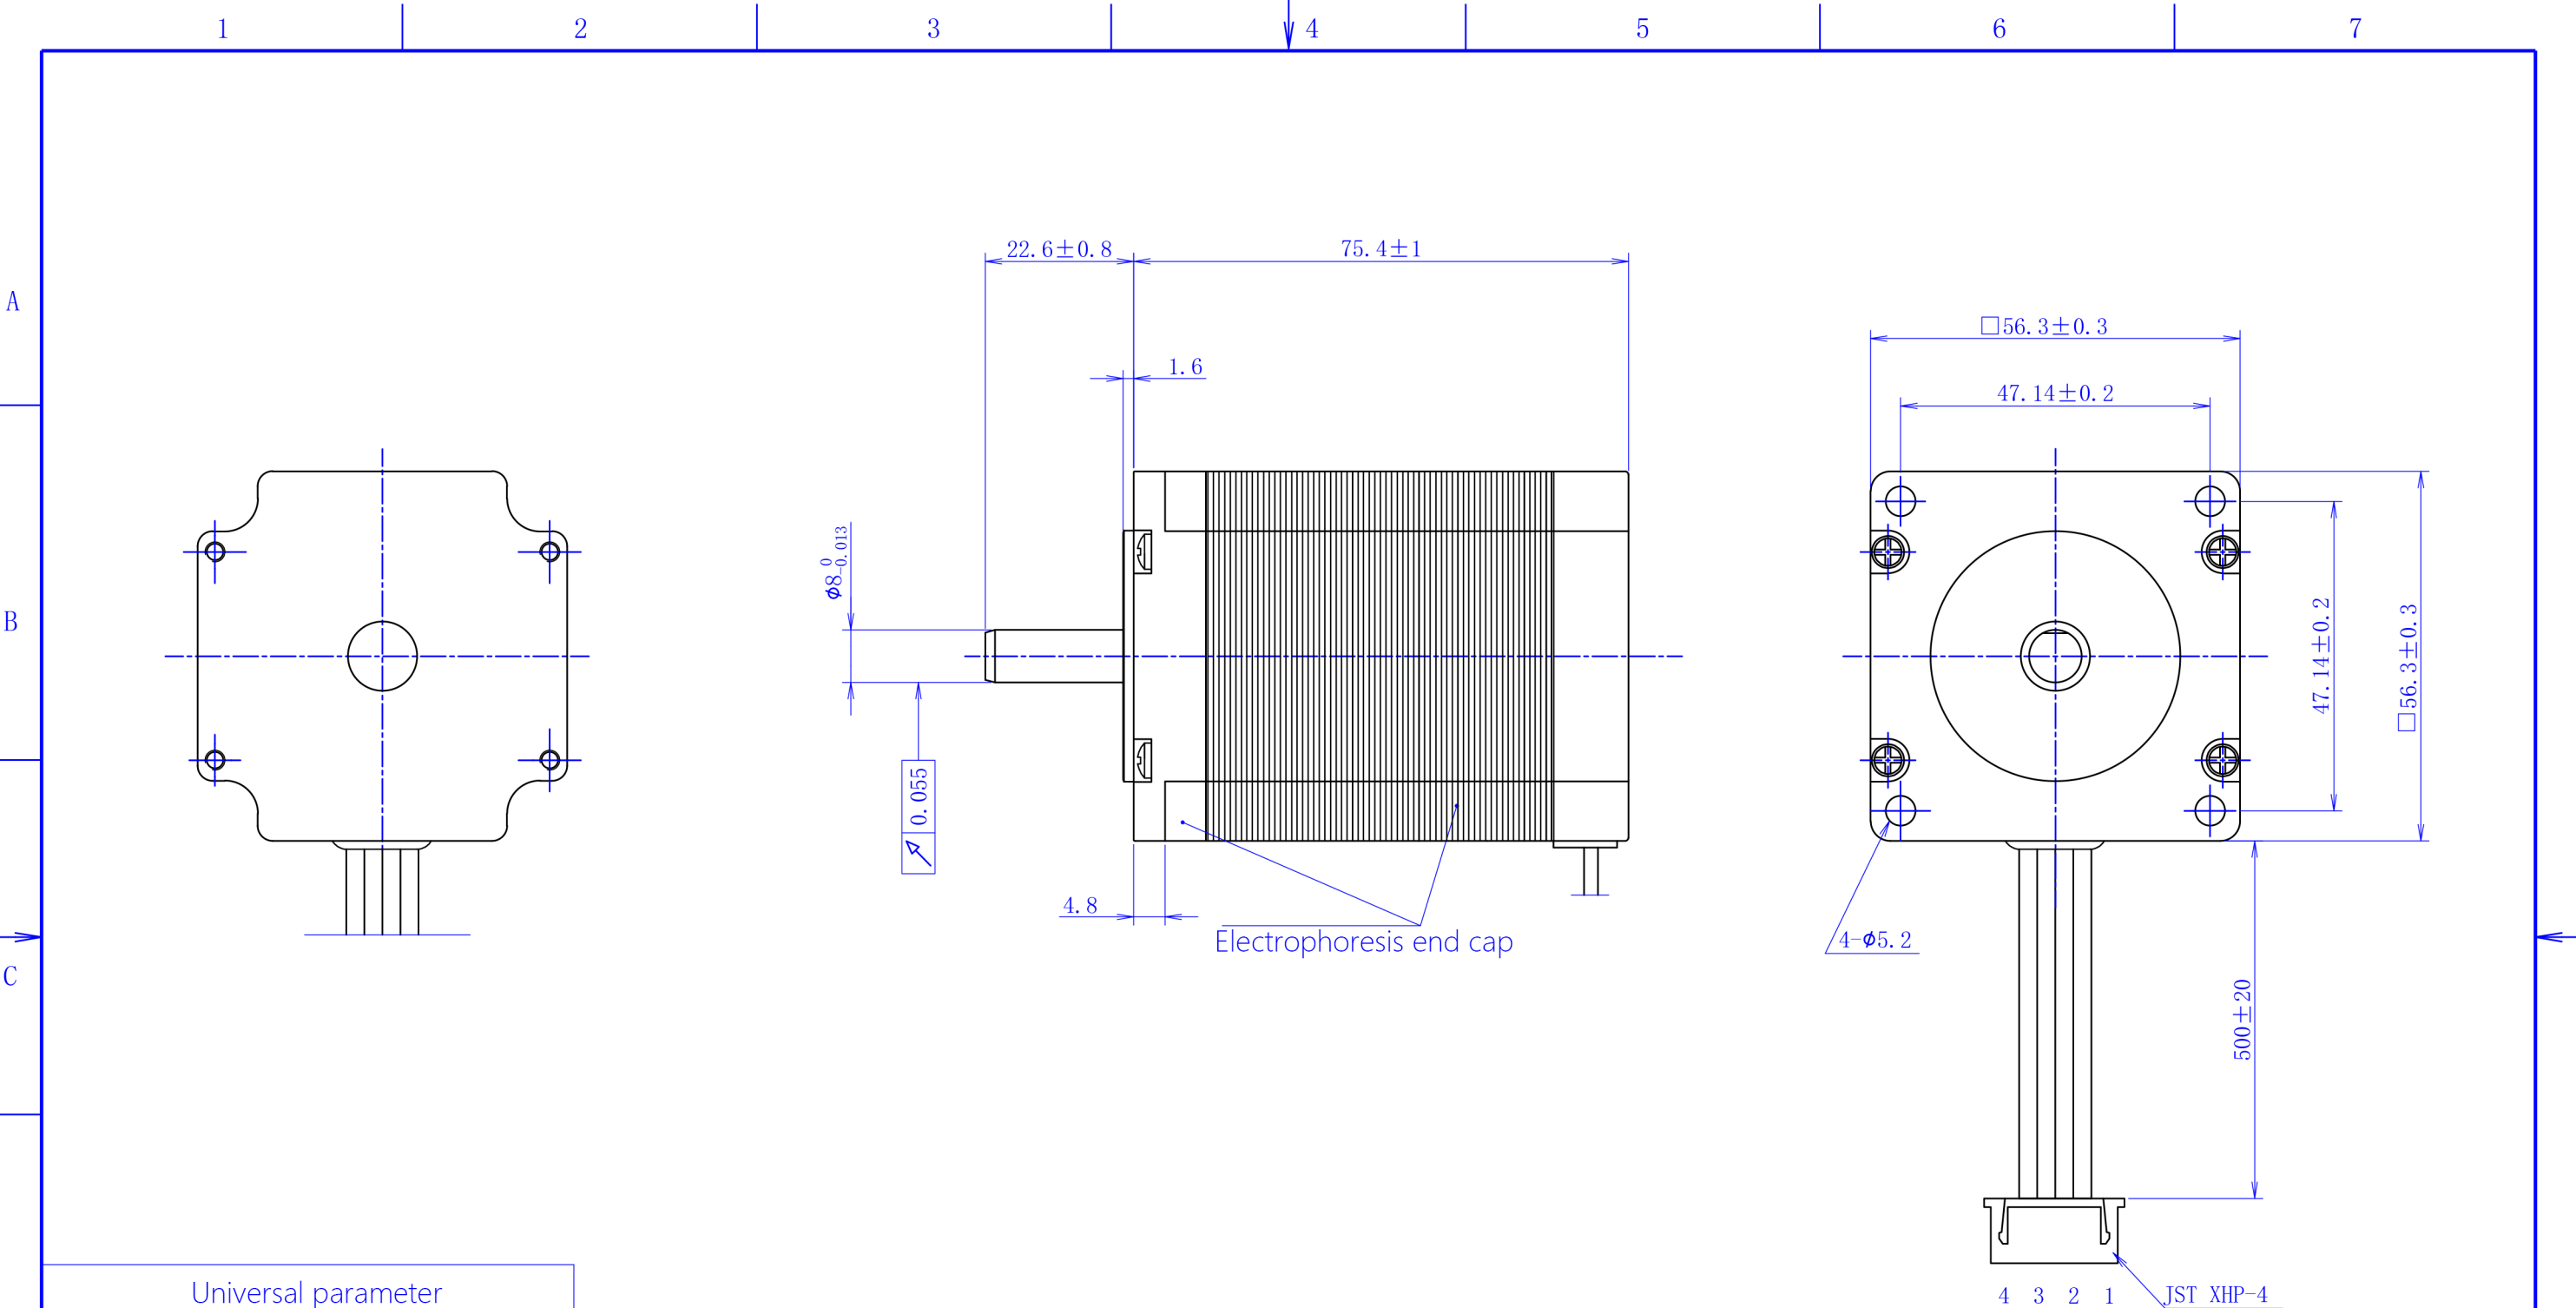

Universal parameter	
Step Angle	1.8°
Phase number	Two phase
Insulation resistance	100MΩmin. (500V DC)
Insulation class	Class B
Insulation withstand voltage	500V A.C 1 min
Rated current	4.2A
Phase resistance	0.65Ω ±15% AT25°
Phase inductance	2.0mH±20% AT 1KHz, 1Vrms
Holding torque	2.0N.m
Rotor inertia	480g.cm²
weight	1050g

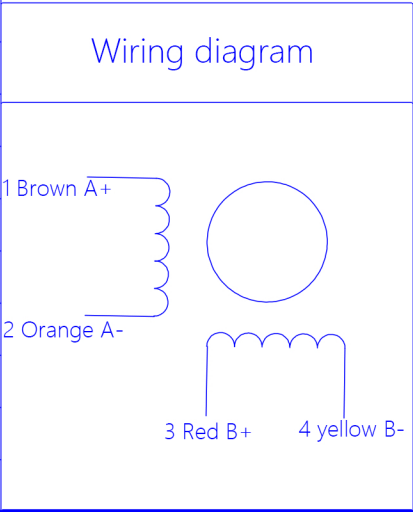

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3									
材 质 MATERIAL		-----									
表面处理 FINISH		-----		24-04-09		00初版		黎明勇		KST-57D53-0007	
				改版 SYM		年 月 日 DATE		变更票图号 REVISION NO.		变 更 事 项 REVISIONS	
制 图 DRAWN		设 计 DESIGNED		检 图 CHECKED		确 认 CHECKED		比 例 SCALE		品 名 TITLE	
凯福科技 24-04-09 黎明勇		凯福科技 24-04-09 黎明勇						1:1		电动机规格书	
										图 号 DWG. NO.	
										213-0154-00	
										备 注 NOTE	
										页 SHEET	
										1/1	