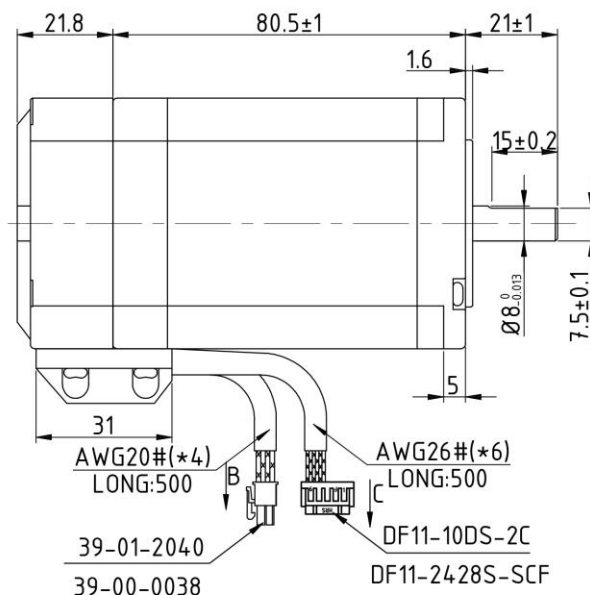
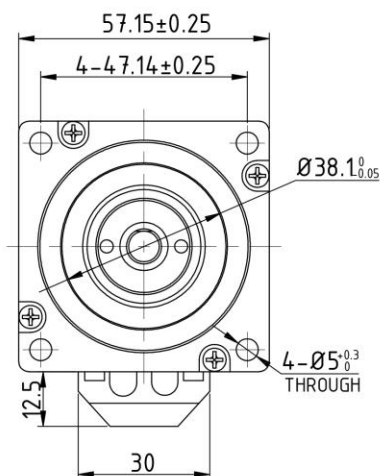



Encode Control
(1000CPR)

1	Black	EGED
2	Red	+5VCC
3	Blue/ White	EA-
4	Bule Orange/ White	EA+
5		EB-
6	Orange	EB+

General parameters & standard parameters

Step angle	1.8°
Number of phases	2
Insulation resistance	100MΩmin.
Insulation level	Class B
Moment of inertia	520g.cm ²
Weight	1.2kg
Drive motor	24V
Rated current	5A
Phase resistance	0.42Ω±10%
Phase inductance	1.9mH±20%
Holding torque	2.2N.m
Dielectric strength	500V AC


Direction B
3:1



Direction C
3:1



Wiring Diagram



MATERIAL	----	2							
		1							
FINISH	----	0	'19-07-07	----	00 First version	Xu Yuanhao			KST-57D53-E-0004
		SYM	DATE	REVISION NO.	REVISIONS	BY			NOTE
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	FREE	TITLE	MOTR SPECIFICATION	THIRD ANGLI PROJECTION	
Dongguan Kaifull '19-07-07 Xu Yuanhao	Dongguan Kaifull '19-07-07 Xu Yuanhao					DWG.NO.	Y-19-0707-0		
DONGGUANKAIFULL CO.,LTD.							SHEET	1/1	