



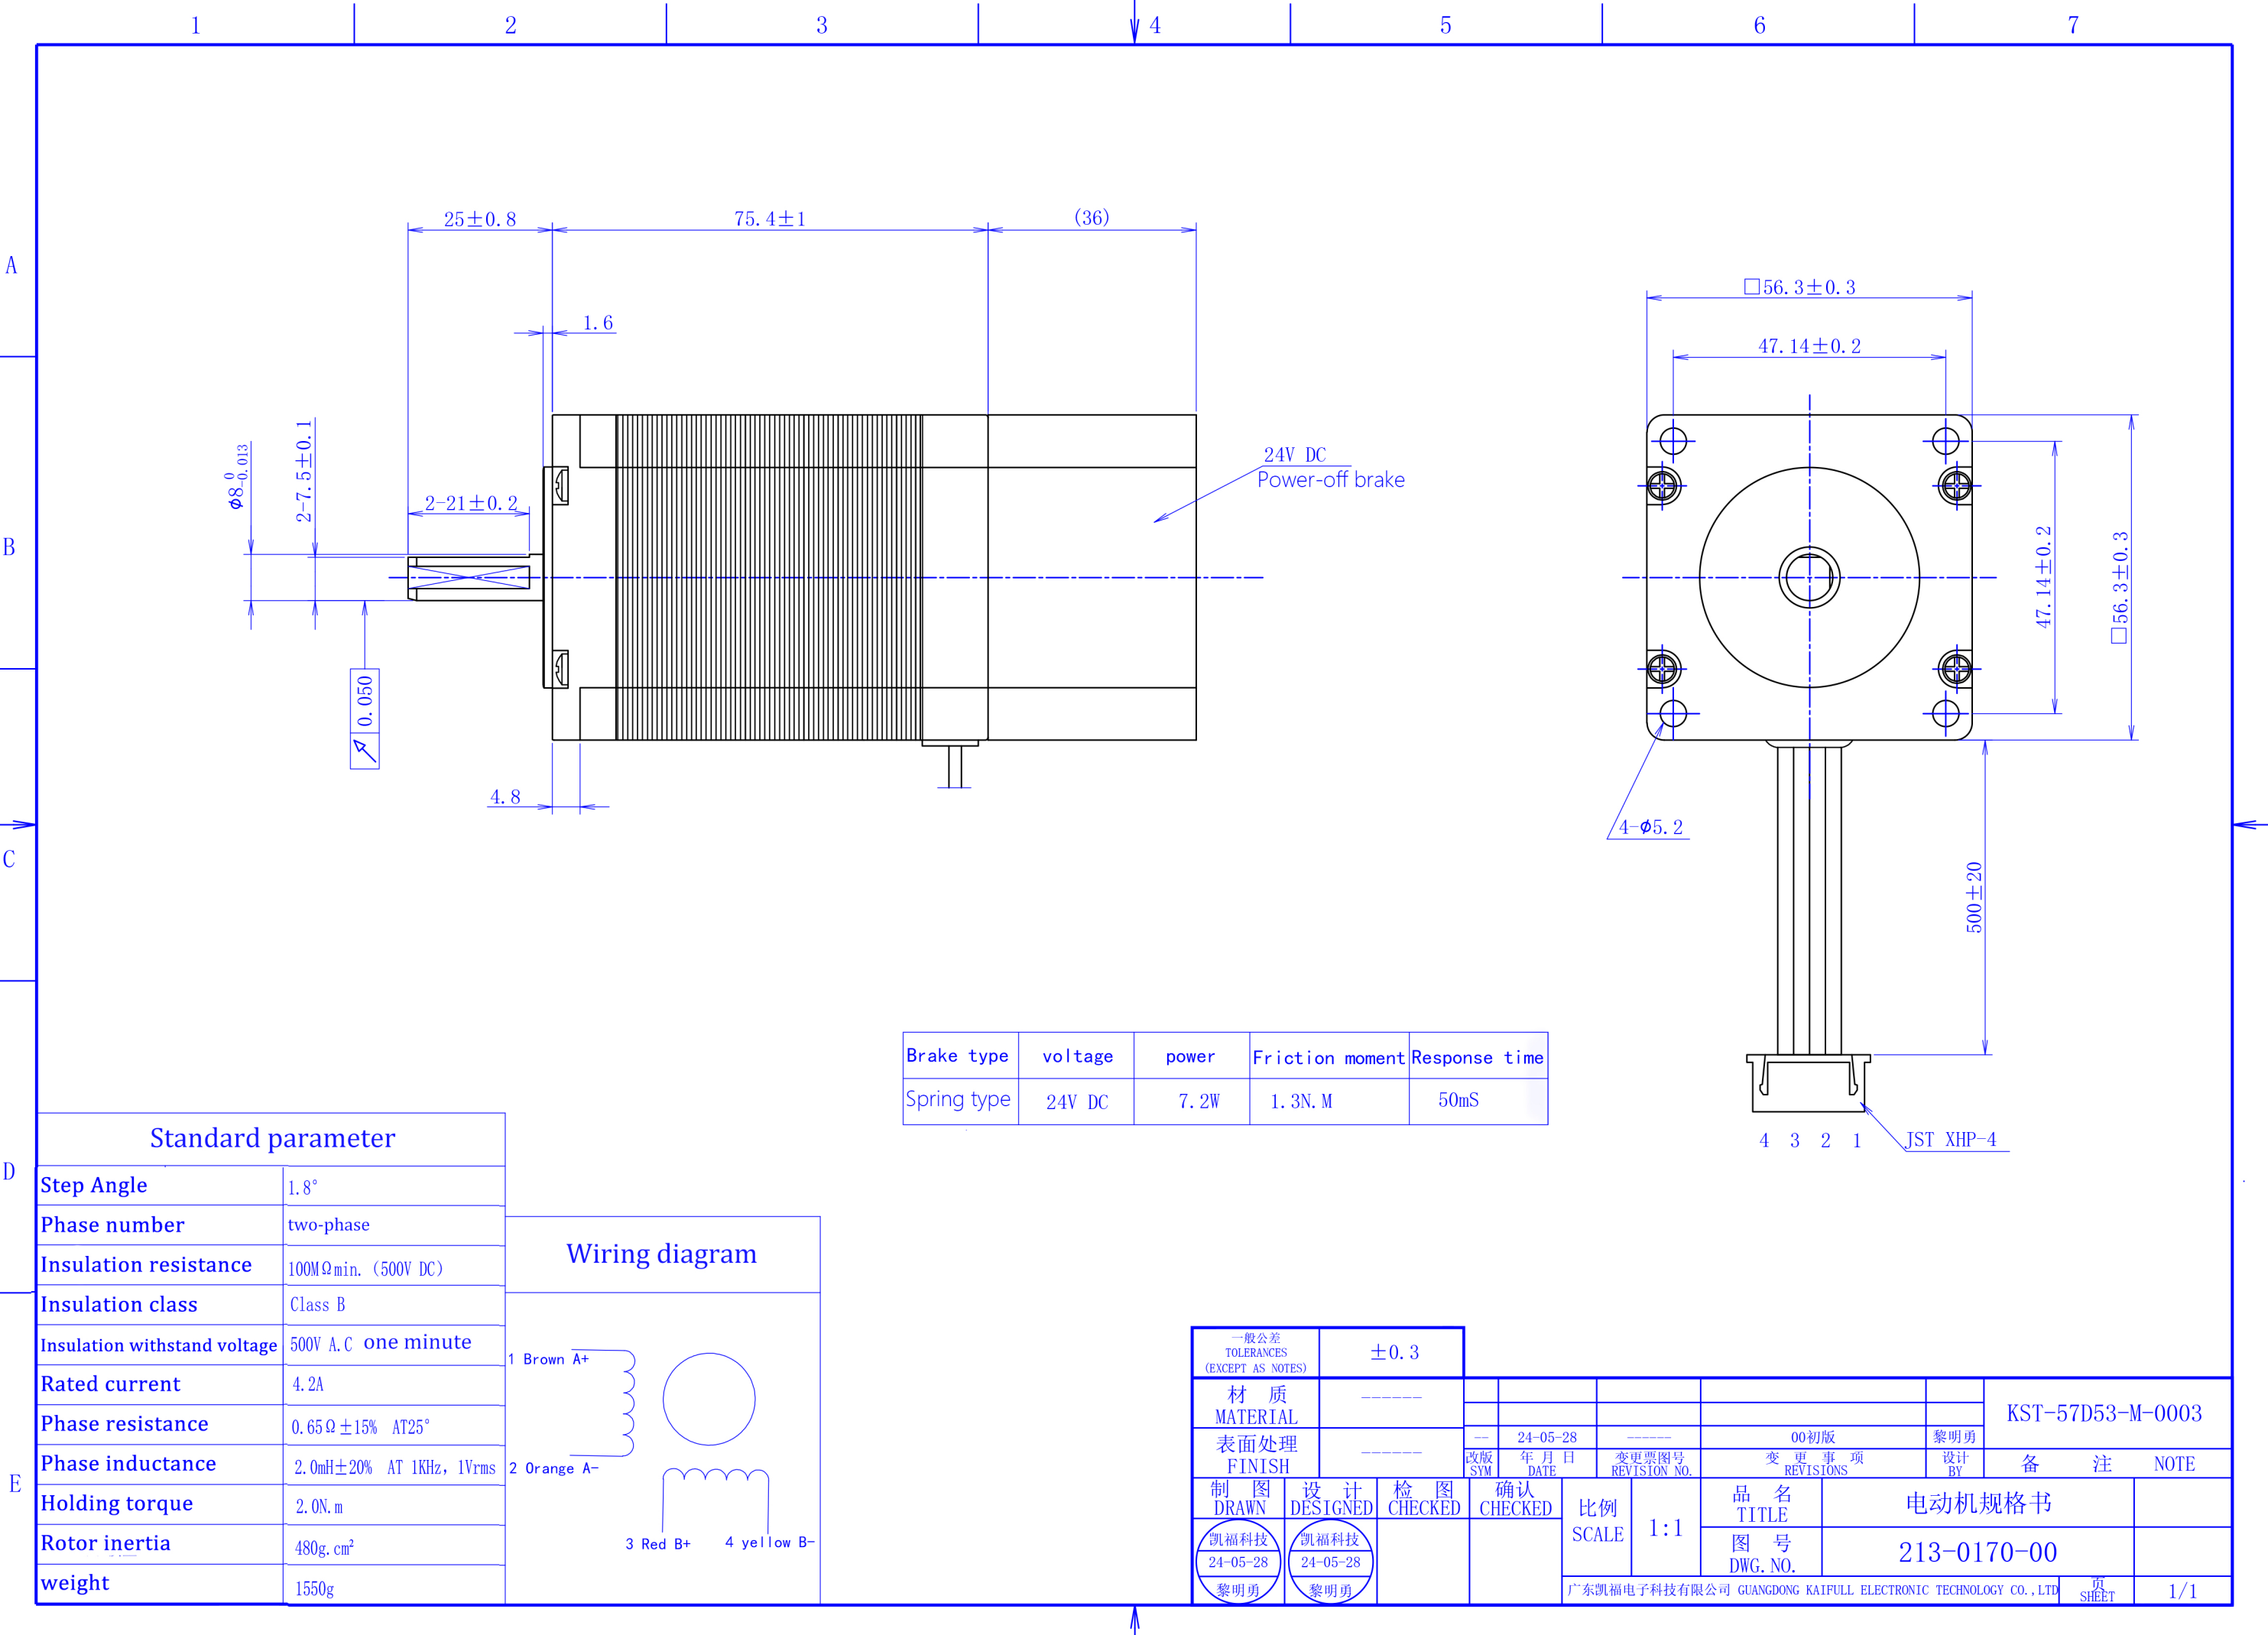

Brake type	voltage	power	Friction moment	Response time
Spring type	24V DC	7.2W	1.3N. M	50mS

Standard parameter	
Step Angle	1.8°
Phase number	two-phase
Insulation resistance	100M Ω min. (500V DC)
Insulation class	Class B
Insulation withstand voltage	500V A.C one minute
Rated current	4.2A
Phase resistance	0.65 $\Omega \pm 15\%$ AT25°
Phase inductance	2.0mH $\pm 20\%$ AT 1kHz, 1Vrms
Holding torque	2.0N.m
Rotor inertia	480g.cm ²
weight	1550g

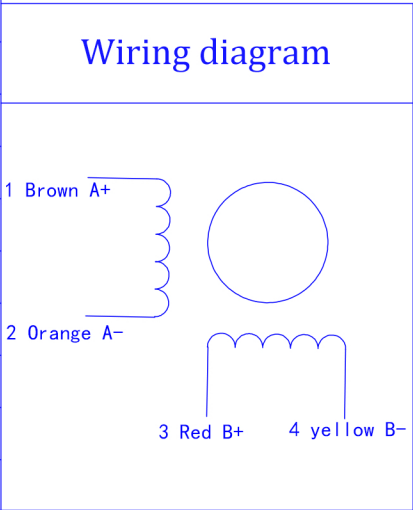

一般公差 TOLERANCES (EXCEPT AS NOTES)		± 0.3									
材 质 MATERIAL		-----									
表面处理 FINISH		-----		24-05-28		00初版		黎明勇			
制 图 DRAWN		设 计 DESIGNED		检 图 CHECKED		确 认 CHECKED		比 例 SCALE		品 名 TITLE	
凯福科技 24-05-28 黎明勇		凯福科技 24-05-28 黎明勇						1:1		电动机规格书	
										图 号 DWG. NO.	
										213-0170-00	
										备 注 NOTE	
										1/1	