

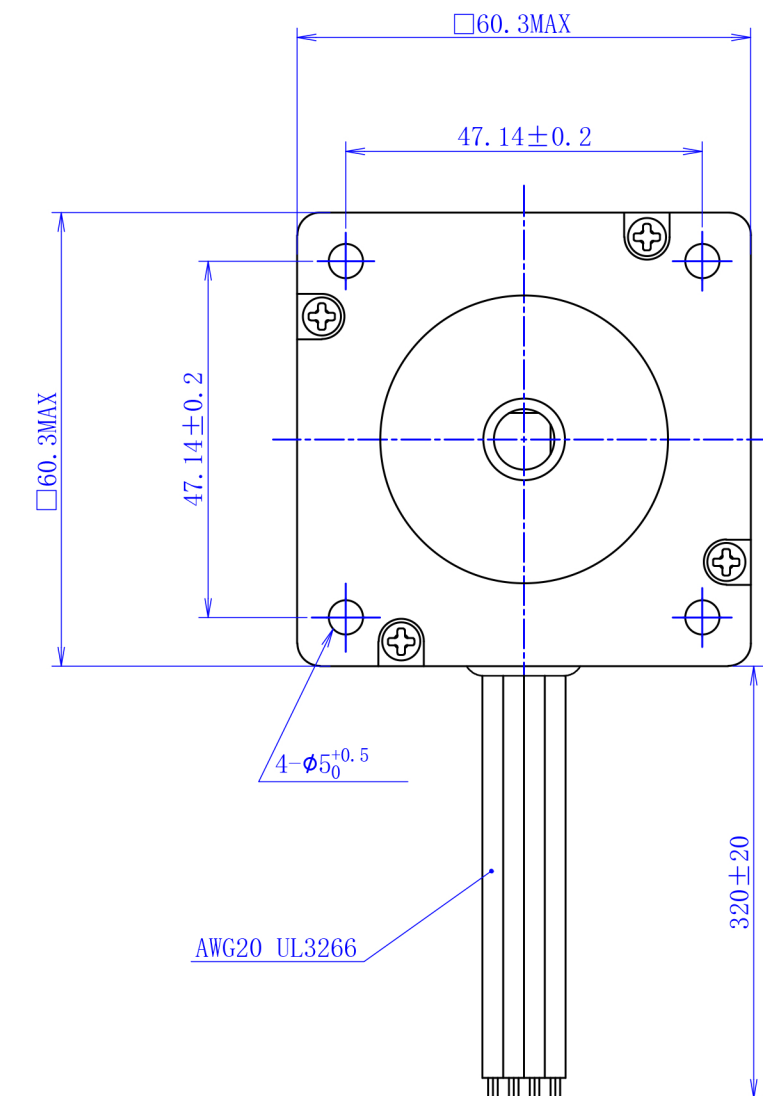
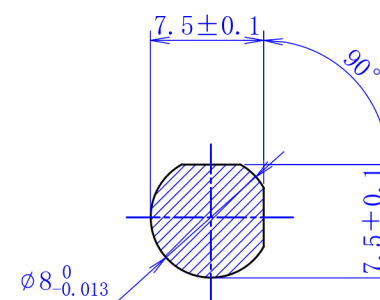
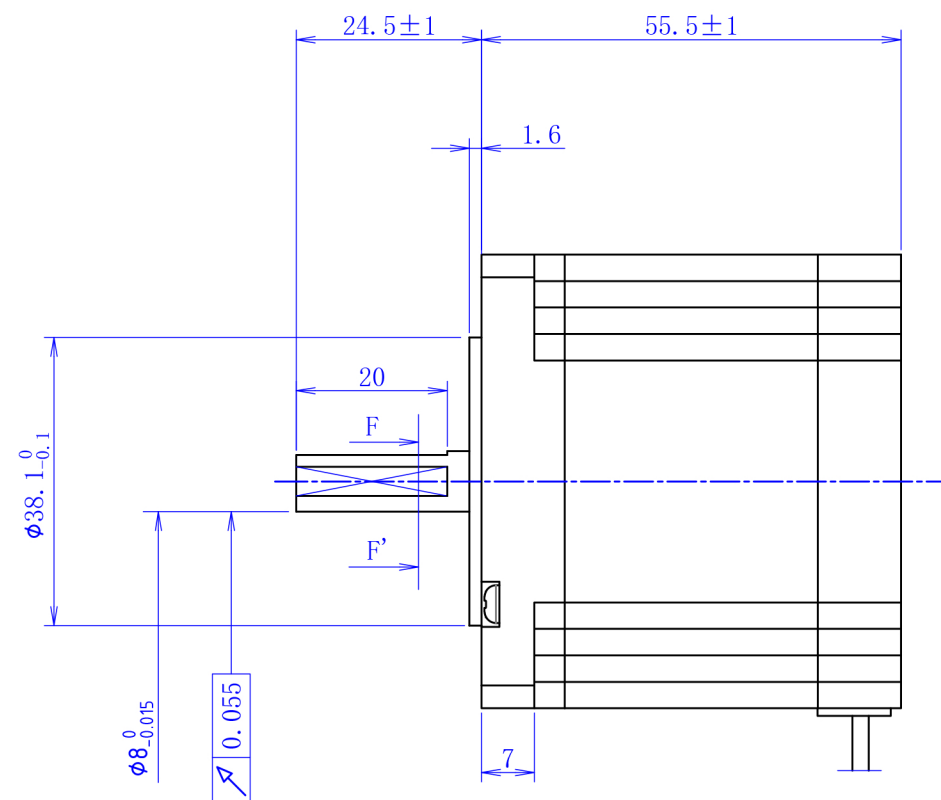


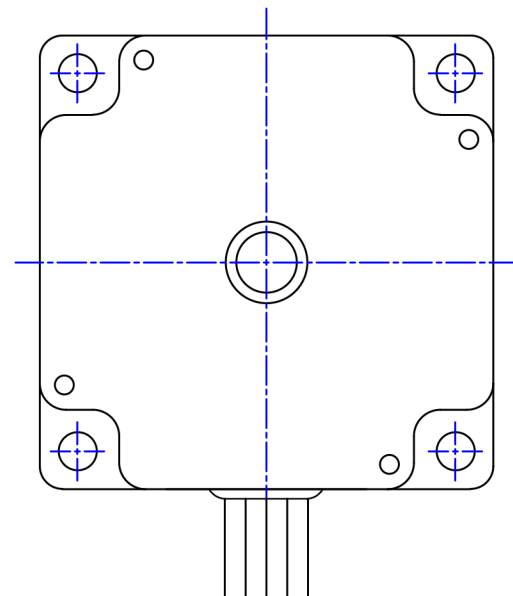

Standard parameter	
Step Angle	1.8°
Phase number	2相
Insulation resistance	100MΩ min. (500V DC)
Insulation class	Class B
Insulation withstand voltage	500V A.C 1分钟
Rated current	4.2A
Phase resistance	$0.5\Omega \pm 15\%$ AT25°
Phase inductance	$1.8\text{mH} \pm 20\%$ AT 1KHz, 1Vrms
Holding torque	1.4N.m
Rotor inertia	440g.cm ²
weight	800g

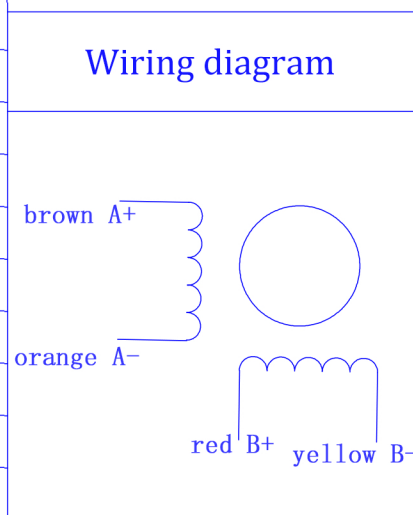

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3											
材 质 MATERIAL		-----								KST-60D34-0002			
				01	24-09-06	-----	机身长度变更		黎明勇				
表面处理 FINISH		-----		--	24-09-02	-----	00初版		黎明勇				
				改版 SYM	年 月 日 DATE	变更票图号 REVISION NO.	变 更 事 项 REVISIONS		设计 BY	备 注 NOTE			
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	确 认 CHECKED	比 例 SCALE		1:1		品 名 TITLE		电动机规格书			
								图 号 DWG. NO.		213-0198-01			
广东凯福电子科技有限公司 GUANGDONG KAIFULL ELECTRONIC TECHNOLOGY CO., LTD										页 SHEET		1/1	