

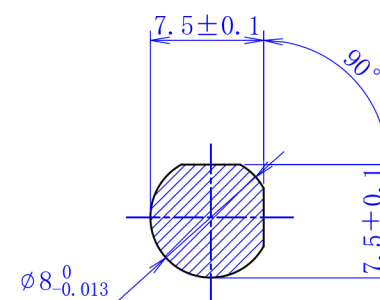
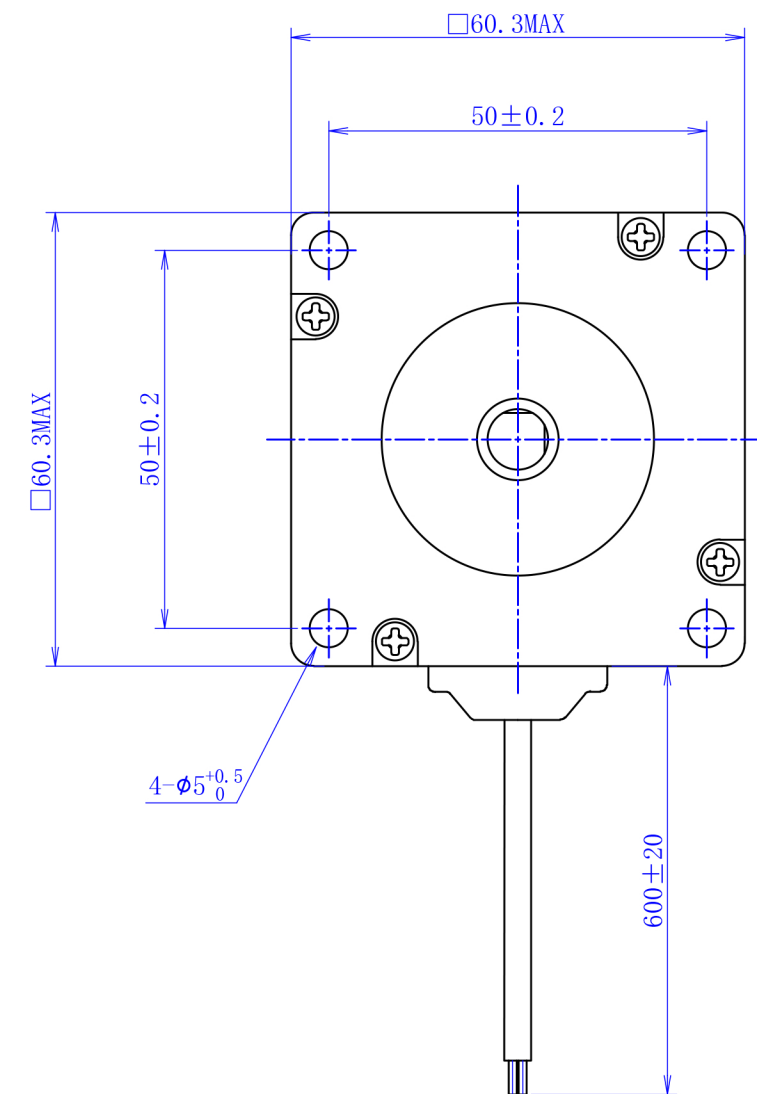
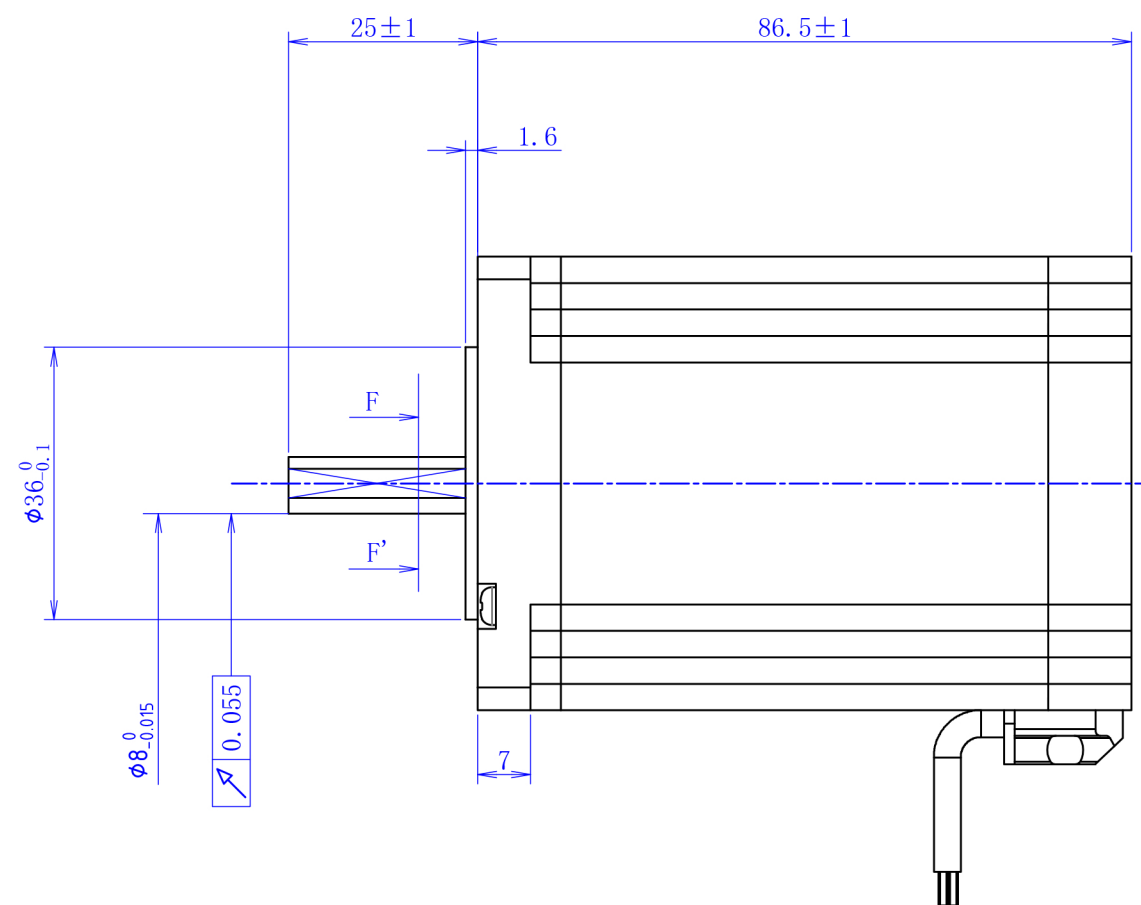


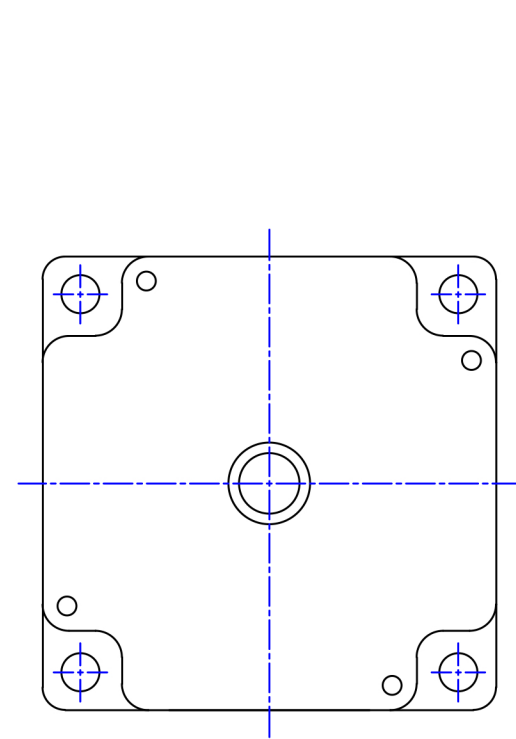

note : 1、 Maximum radial load 75N (20mm from mounting flange)
2、 Maximum axial load 15N

Standard parameter	
Step Angle	1.8°
Phase number	two-phase
Insulation resistance	100MΩmin. (500V DC)
Insulation class	Class B
Insulation withstand voltage	500V A.C one minute
Rated current	4.2A
Phase resistance	$0.8\Omega \pm 15\%$ AT25°
Phase inductance	$3.3\text{mH} \pm 20\%$ AT 1KHz, 1Vrms
Holding torque	3.0N.m
Rotor inertia	980g.cm ²
weight	1400g

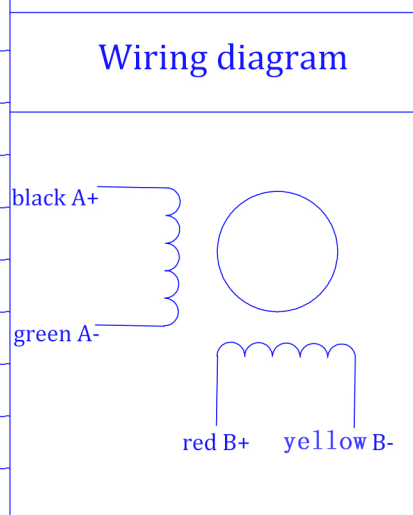

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3									
材 质 MATERIAL	-----						KST-60D65-0002				
表面处理 FINISH	-----	--	24-05-17	-----	00初版	黎明勇					
		改版 SYM	年 月 日 DATE	变更票图号 REVISION NO.	变 更 事 项 REVISIONS	设计 BY	备 注 NOTE				
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	确 认 CHECKED	比例 SCALE	1:1	品 名 TITLE	电动机规格书				
						图 号 DWG. NO.	213-0166-00				
				广东凯福电子科技有限公司 GUANGDONG KAIFULL ELECTRONIC TECHNOLOGY CO., LTD						页 SHEET	1/1