
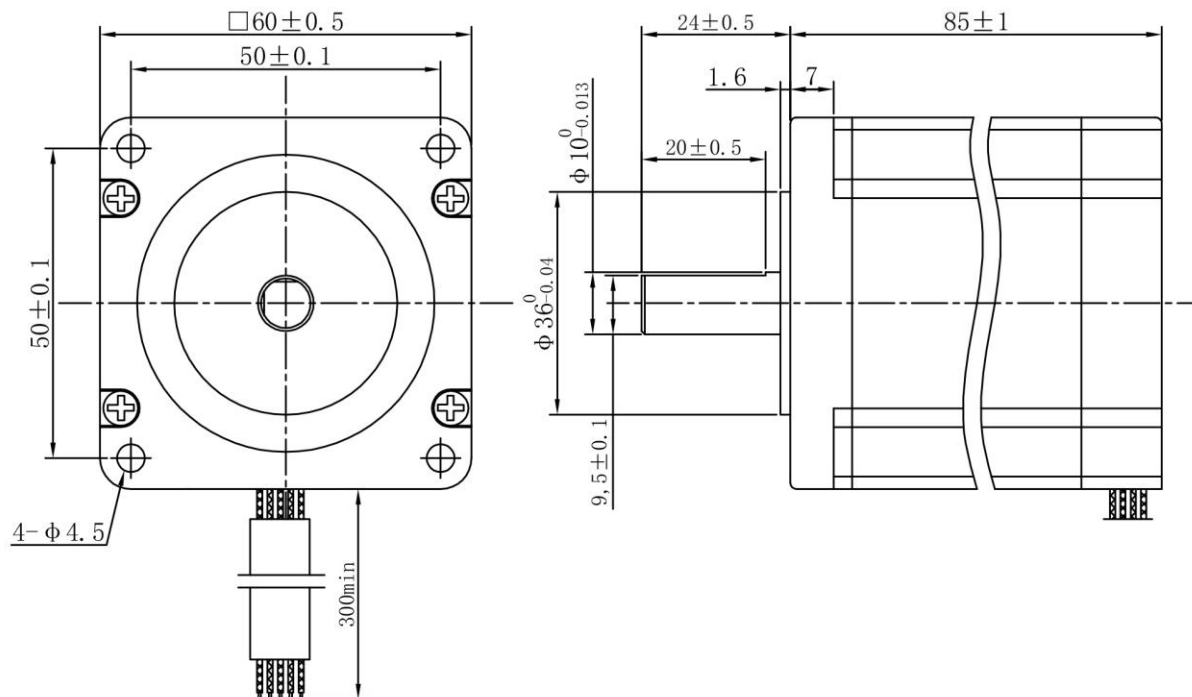


1		2		3		4						
A	General technical parameters		Electrical technical parameters		Wiring Diagram							
	Stepping angle	1.8°	Rated voltage	24V DC								
	Number of phases	2	Rated current	0.8A								
	Insulation resistance	100MΩMIN(500V DC)	Resistance	15.4±15%Ω								
	Insulation level	Class B/winding	Inductance	38.4±20% mH								
	Weight	About 1400g	Holding torque	2.5N.m								
	Braking torque	1100gf.cm REF.	Moment of inertia	About 900g.cm²								
Overall dimension: unit=mm												
												
TOLERANCES (EXCEPT AS NOTES)		±0.3										
MATERIAL	----						KST-60D65-0003					
FINISH	----											
		SYM	DATE	REVISION NO.	REVISIONS	BY						
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	1:1	TITLE	MOTR SPECIFICATION	THIRD ANGLI PROJECTION				
Dongguan Kaifull 19-01-17 Xu Yuanhao	Dongguan Kaifull 19-01-17 Xu Yuanhao					DWG.NO.	Y-19-0117-0					
Guangdong Kaifull Electronics Technology Co., Ltd.							SHEET	1/1				