
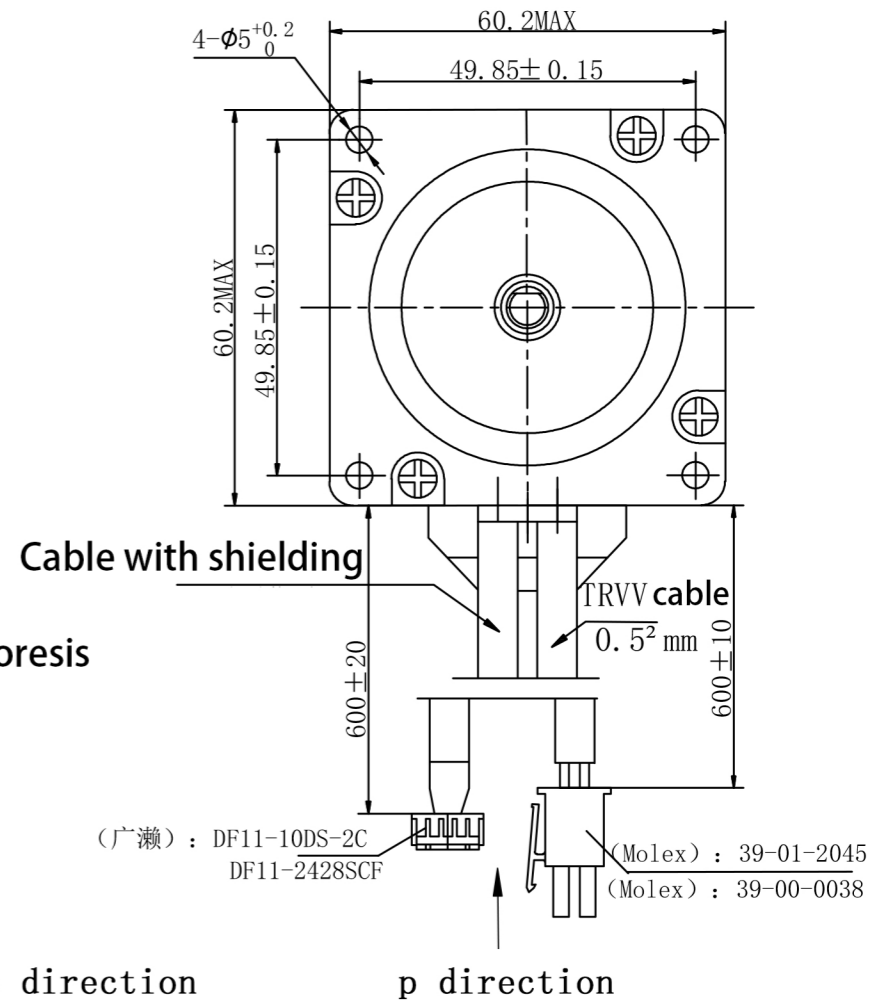


Overall dimension unit : mm

Excitation sequence VS. rotation direction

STEP	A+	B+	A-	B-
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+


CW → CCW  
From the end of the shaft, clockwise  
Directional rotation CW

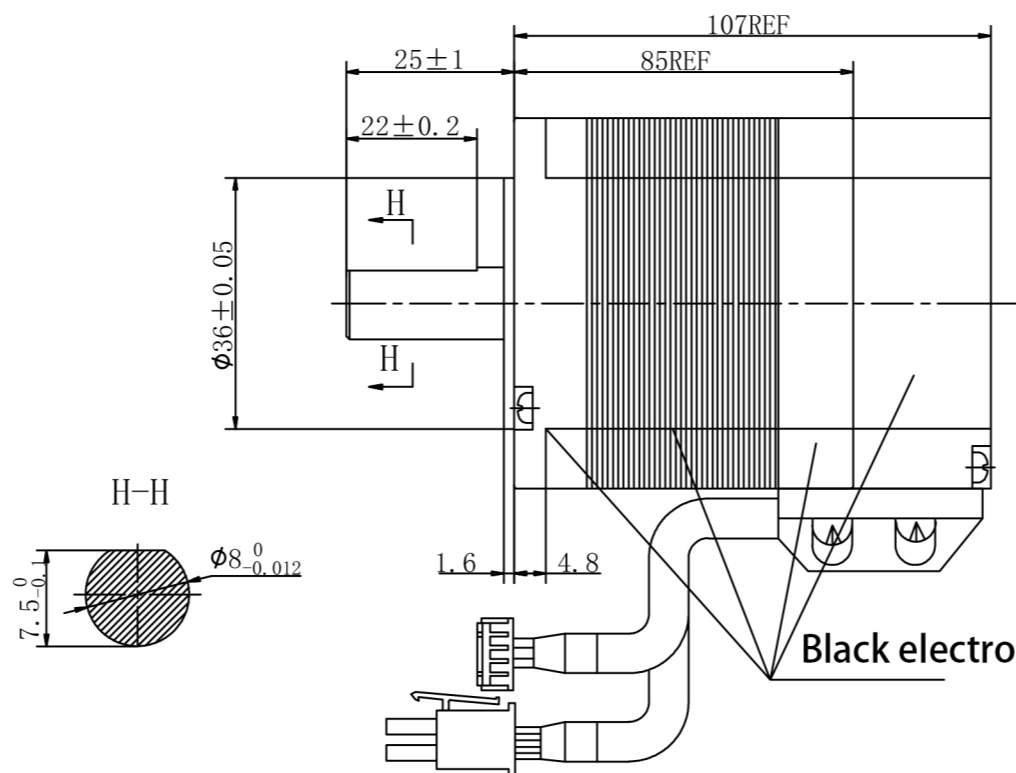


Universal parameter

Step Angle	1.8°
Phase number	2
Insulation resistance	100MΩ min.
Insulation class	Class B
Moment of inertia	750g.cm <sup>2</sup>
weight	1.2kg
Driving voltage	24V
Rated current	5A
Phase resistance	0.6Ω ±10%
Phase inductance	2.2mH ±20%
Holding torque	2.8N.m
Insulation withstand voltage	500V AC

Wiring diagram

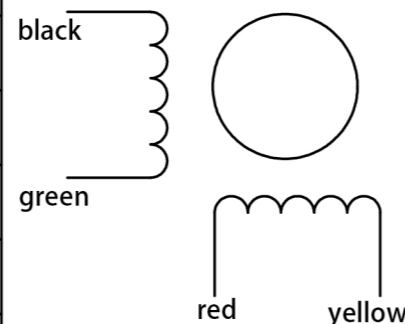

Encoder signal end interface :

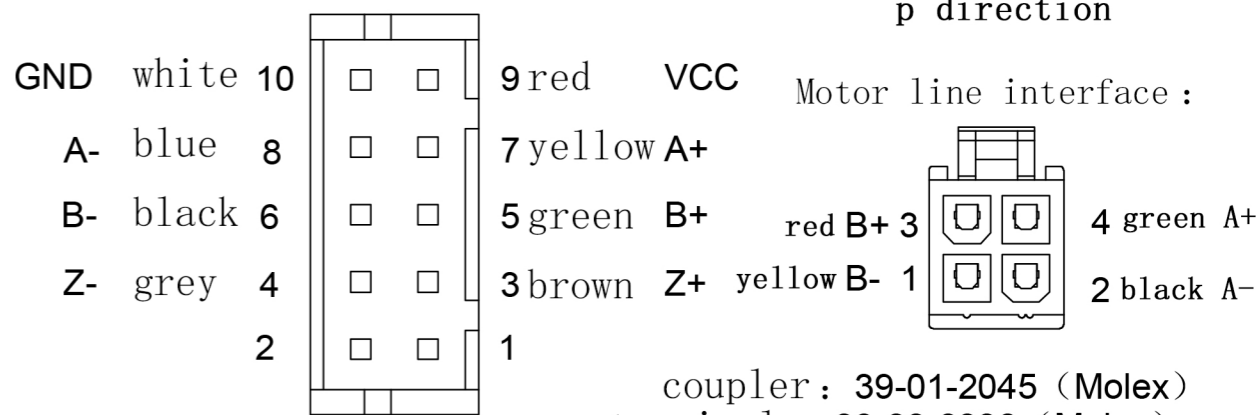

coupler : DF11-10DS-2C  
terminal : DF11-2428SCF

材质 MATERIAL		2								
表面处理 FINISH		1								
制图 DRAWN	设计 DESIGNED	检图 CHECKED	检印 CHECKED	比例 SCALE	FREE	品名 TITLE	电机规格书 MOTR SPECIFICATION			
凯福科技 '22-04-11	凯福科技 '22-04-11					图号 DWG. NO.	Y-22-0411-0			
许元好	许元好			广东凯福电子科技有限公司 GUANGDONG KAIFULL CO., LTD.		页 SHEET	1/1			