

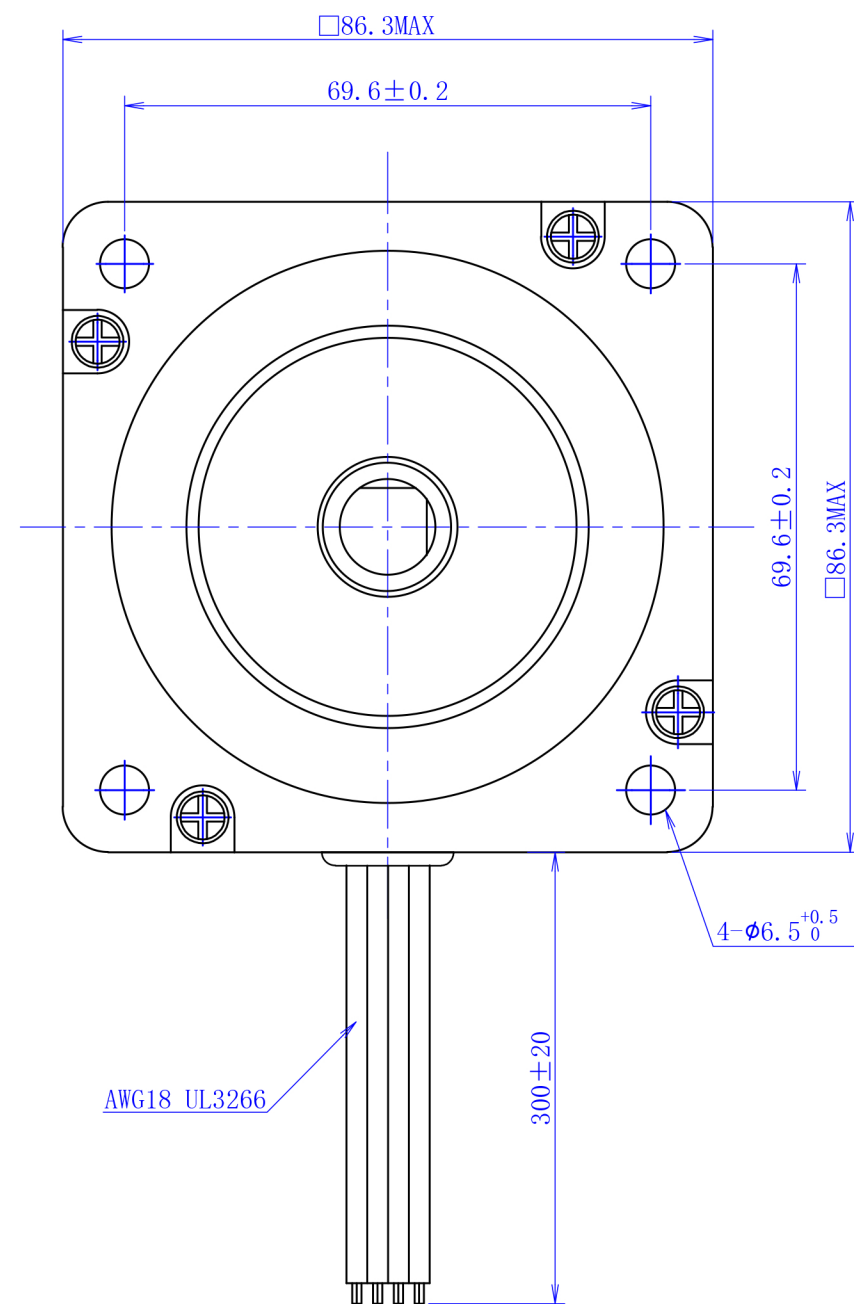


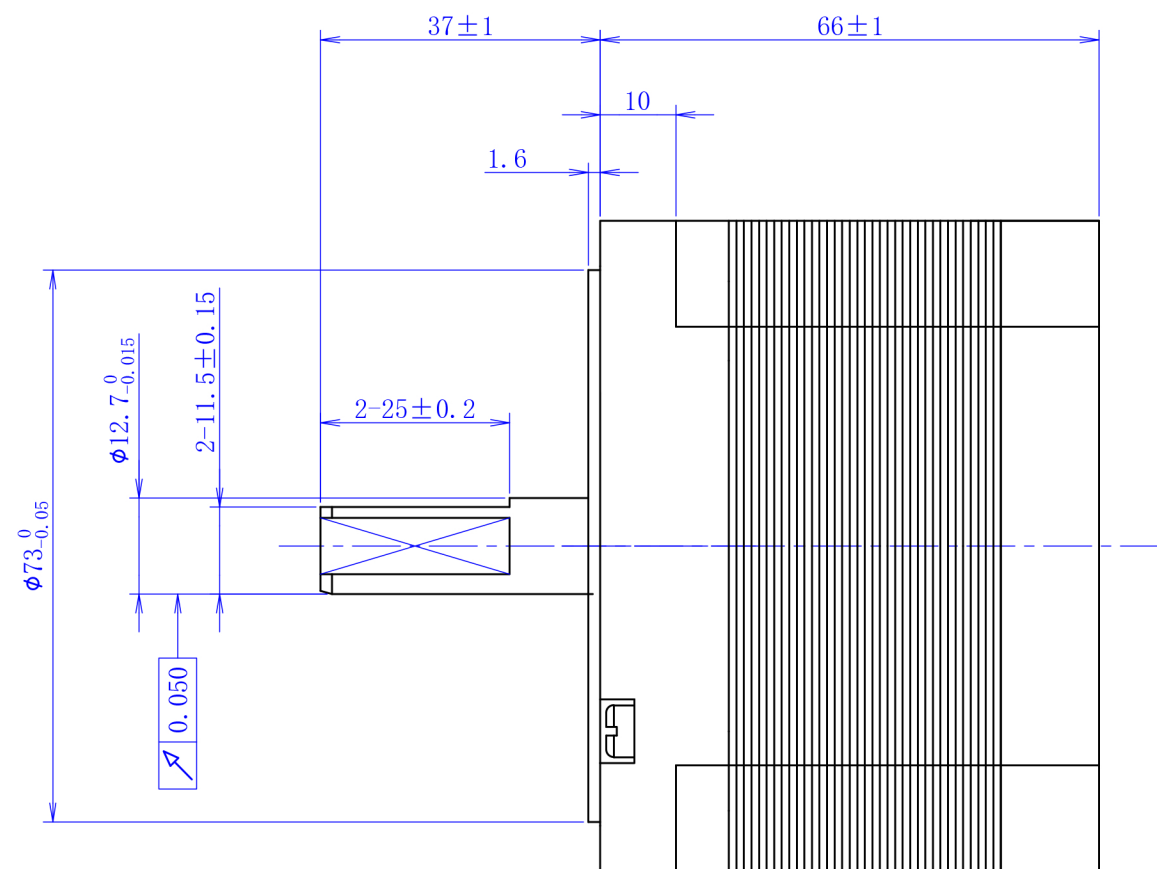

Standard parameter	
Step Angle	1.8°
Phase number	two-phase
Insulation resistance	100MΩ min. (500V DC)
Insulation class	Class B
Insulation withstand voltage	500V A.C one minute
Rated current	6.3A
Phase resistance	0.24Ω ±15% AT25°
Phase inductance	1.4mH±20% AT 1KHz, 1Vrms
Holding torque	2.9N.m
Rotor inertia	1100g.cm²
weight	1600g

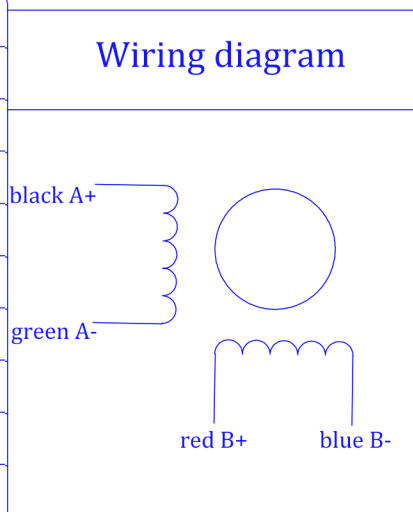

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3						
材 质 MATERIAL		-----						KST-86D33-0001
表面处理 FINISH		-----		--	24-06-11	-----	00初版	黎明勇
				改版 SYM	年 月 日 DATE	变更票图号 REVISION NO.	变 更 事 项 REVISIONS	设计 BY
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	确 认 CHECKED	比例 SCALE	1:1	品 名 TITLE	电动机规格书	
凯福科技 24-06-11	凯福科技 24-06-11					图 号 DWG. NO.	213-0174-00	
黎明勇	黎明勇			广东凯福电子科技有限公司 GUANGDONG KAIFULL ELECTRONIC TECHNOLOGY CO., LTD				页 SHEET
								1/1