



General technical parameters		Electrical technical parameters		Wiring Diagram 
Stepping angle	1.8°	Rated voltage	24V DC	
Number of phases	2	Rated current	3.6A (parallel)	
Insulation resistance	100MΩMIN(500V DC)	Resistance	0.85±15%Ω	
Insulation level	Class B/winding	Inductance	7±20% mH	
Weight	1600g	Holding torque	3.5N.m	
Braking torque	900gf.cm REF.	Moment of inertia	About 1100g.cm²	

Overall dimension: unit=mm

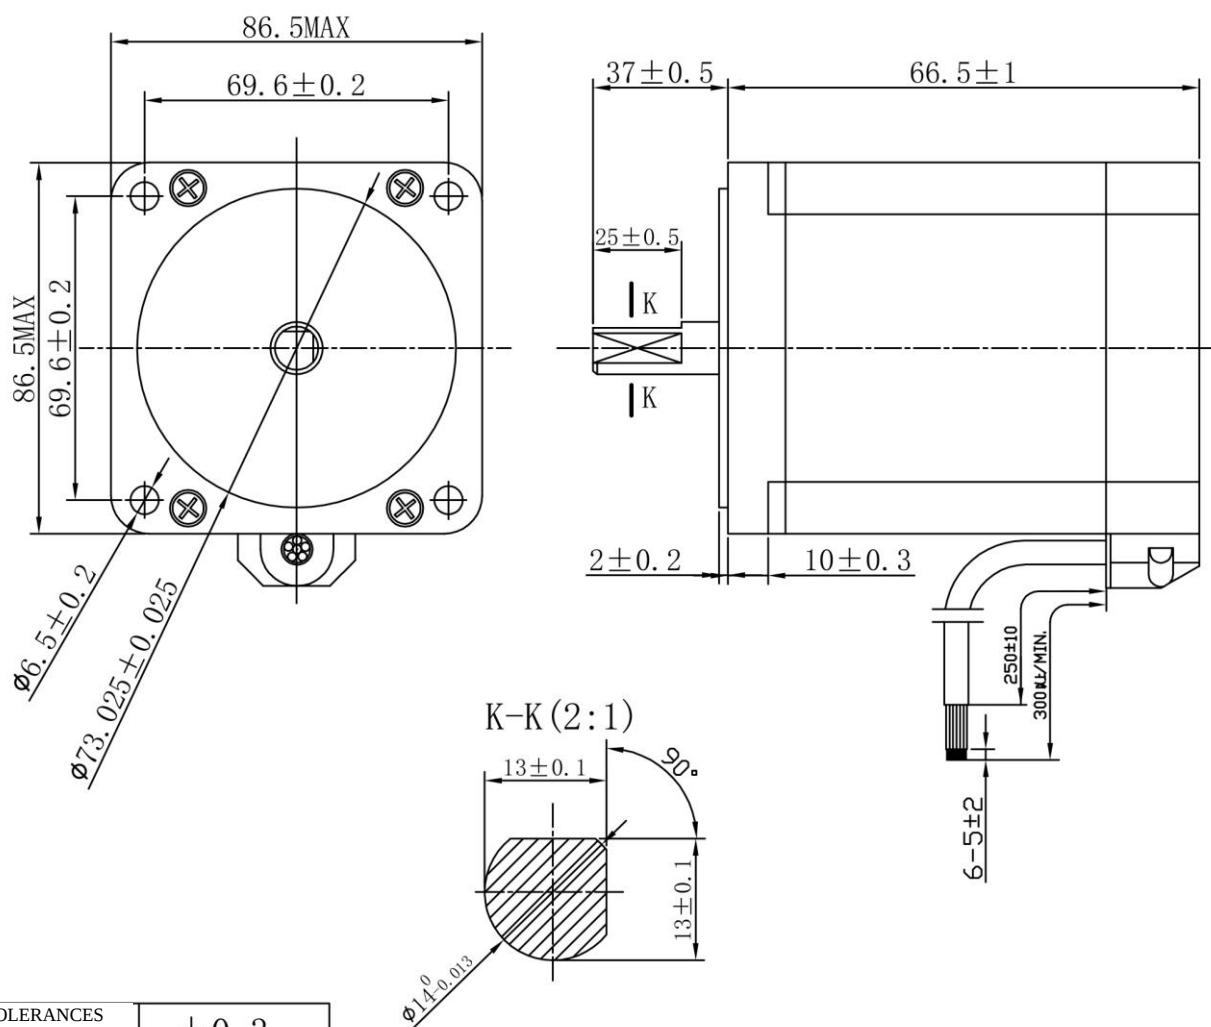

TOLERANCES (EXCEPT AS NOTES)	± 0.3
---------------------------------	-----------

MATERIAL		----								KST-86D33-0002
FINISH		----								
		SYM		DATE	REVISION NO.	REVISIONS	BY	NOTE		
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	1:1	TITLE	MOTR SPECIFICATION		THIRD ANGLI PROJECTION	
Dongguan Kaifull 19-01-15 Xu Yuanhao	Dongguan Kaifull 19-01-15 Xu Yuanhao					DWG.NO.	Y-19-0115-0			
Guangdong Kaifull Electronics Technology Co., Ltd.							SHEET		1/1	