



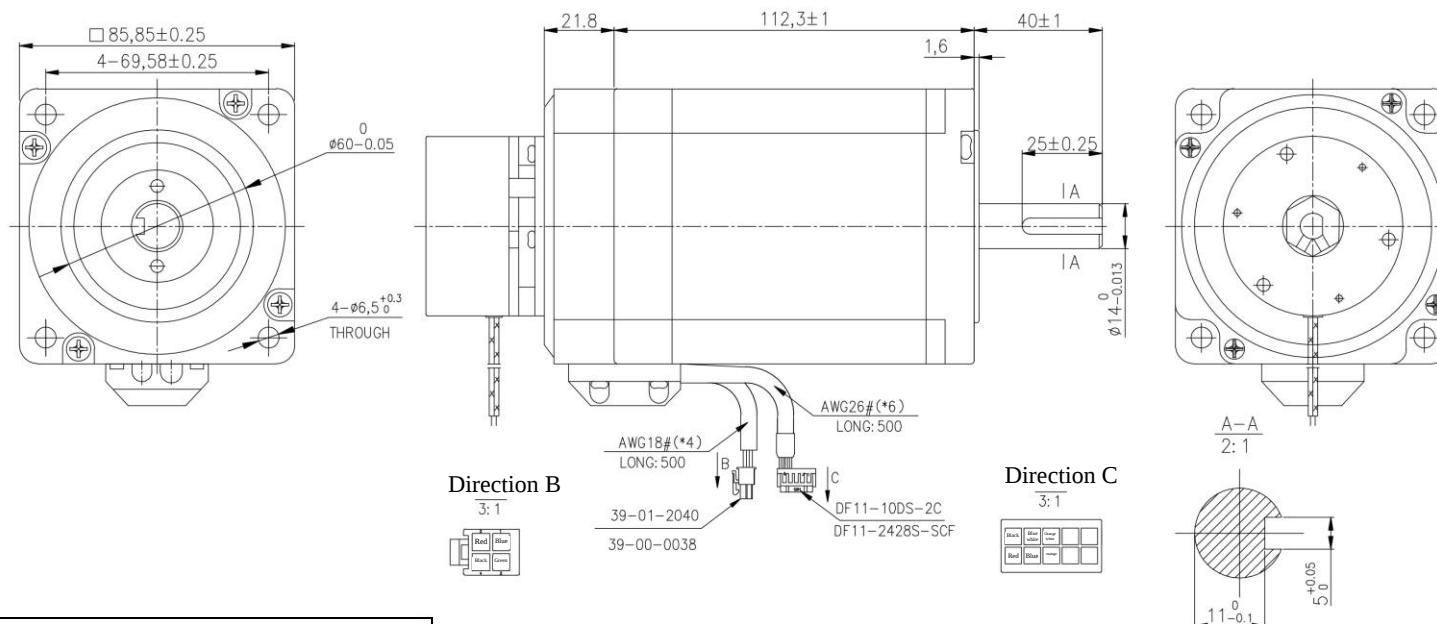

Encode Control (1000CPR)

1	Black	EGED
2	Red	+5VCC
3	Blue / White	EA-
4	Bule	EA+
5	Orange / White	EB-
6	Orange	EB+


Brake Connections



General parameters & standard parameters

Step angle	1.8°
Number of phases	2
Insulation resistance	100MΩmin.
Insulation level	Class B
Moment of inertia	3600g.cm ²
Weight	3.6kg
Drive motor	36V
Rated current	6A
Phase resistance	0.52Ω±10%
Phase inductance	4.7mH±20%
Holding torque	8.2N.m
Dielectric strength	500V AC

Wiring Diagram



MATERIAL	----	2							
		1							
FINISH	----	0	'19-07-11	----	00 First version	Xu Yuanhao			KST-86D85-EM-0004
		SYM	DATE	REVISION NO.	REVISIONS	BY			NOTE
DRAWN	DESIGNED	CHECKED	CHECKED	SCALE	FREE	TITLE	MOTR SPECIFICATION	THIRD ANGLI PROJECTION	
Dongguan Kaifull '19-07-11 Xu Yuanhao	Dongguan Kaifull '19-07-11 Xu Yuanhao					DWG.NO.	Y-19-0711-0		
DONGGUANKAIFULL CO.,LTD.							SHEET	1/1	