

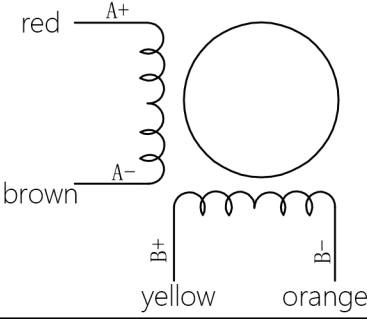


1		2		3		4
General technical parameter		Electrical technical parameter		Wiring diagram		
Stepping Angle	1.8°	Rated voltage	24V DC			
Phase number	2	Rated current	1A			
Insulation resistance	100M Ω MIN (500V DC)	resistance	2.2 ± 15% Ω			
Insulation class	B stage/winding	inductance	1.2 ± 20% mH			
weight	约120g	Holding moment	60mN. m			
Step size	0.01MM	Moment of inertia	约9g. cm²			

外形尺寸：unit=mm

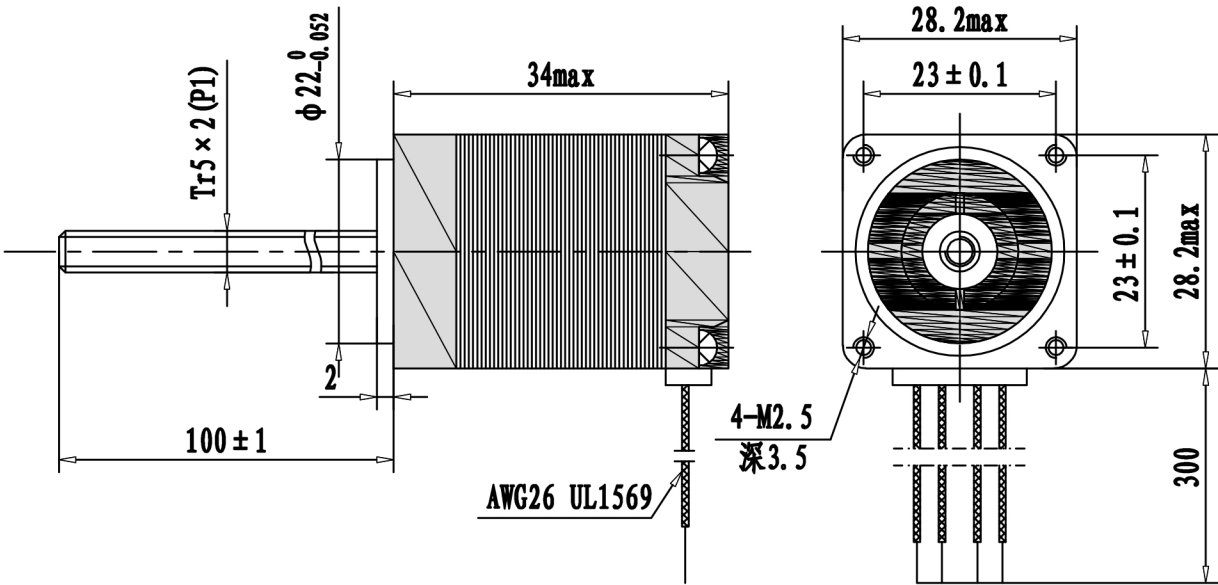

螺母材质：黑色POM

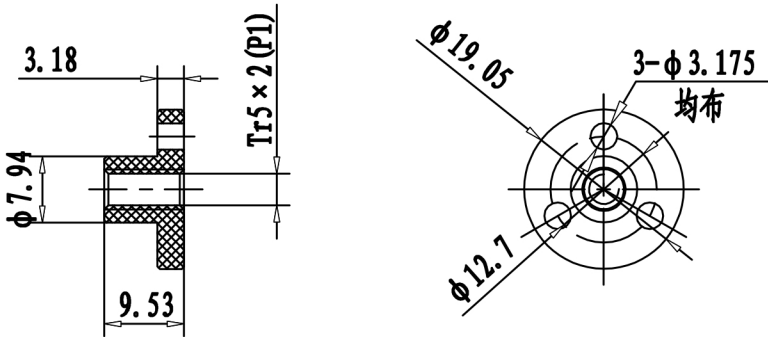

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3						
材 质 MATERIAL							KST-28D18-02LC-100-0006	
表面处理 FINISH				改版 SYM	年 月 日 DATE	变更图号 REVISION NO.	变更事项 REVISIONS	设 计 BY
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	检 印 CHECKED	比 例 SCALE	FREE	品 名 TITLE	电机规格书 MOTR SPECIFICATION	
图 号 DWG. NO.		Y-18-0724-0						三角法 THIRD ANGLE PROJECTION
东莞市凯福 18-07-23 许元好		东莞市凯福 18-07-23 许元好		东莞市凯福电子科技有限公司		页 SHEET		1/1