
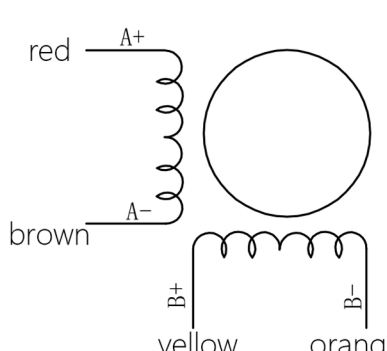
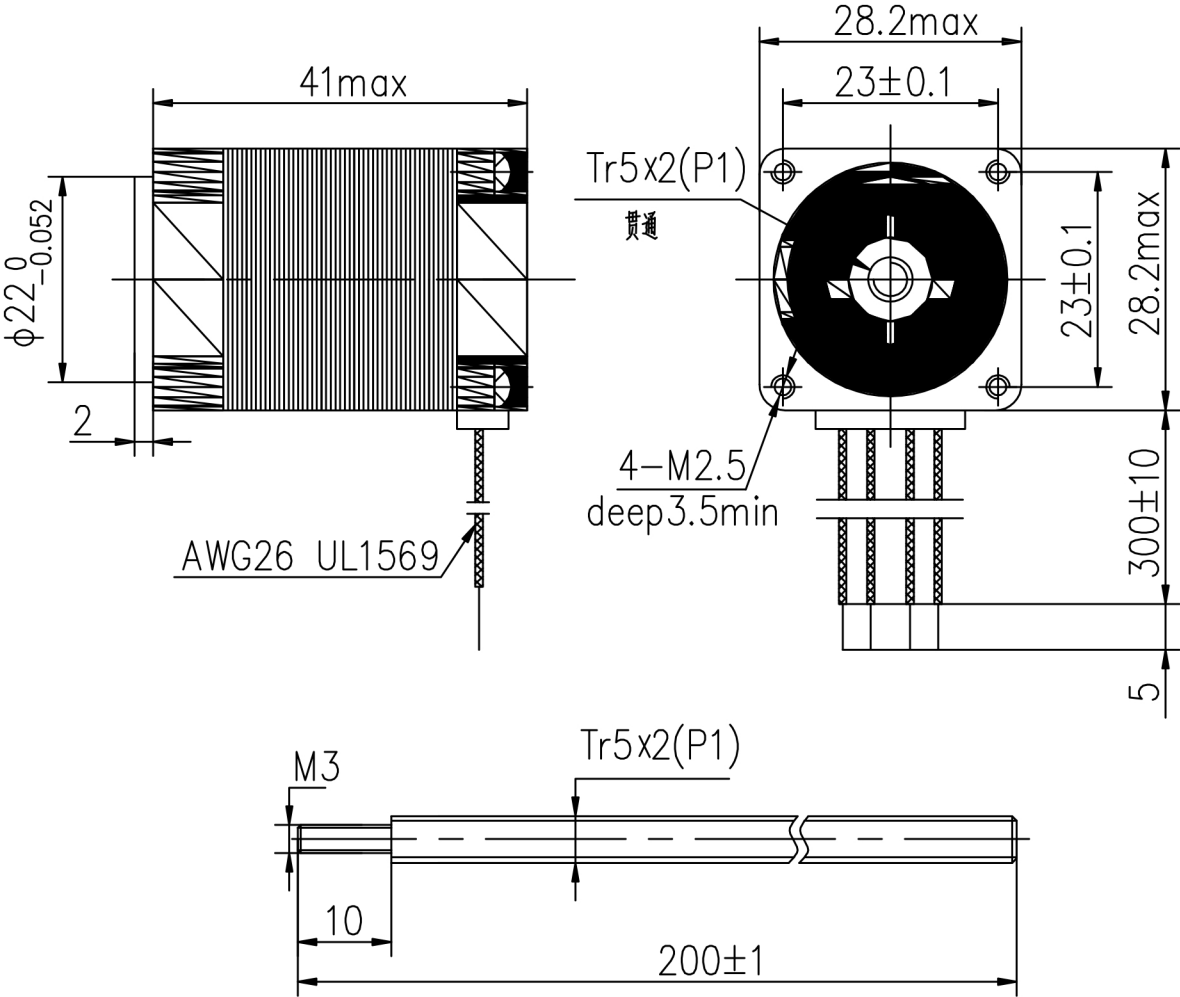


1General technical parameter		2Electrical technical parameter		3	4Wiring diagram
Stepping Angle	1.8°	Rated voltage	24V DC		
Phase number	2	Rated current	0.75A		
Insulation resistance	100MΩ MIN (500V DC)	resistance	7.5±15%Ω		
Insulation class	B stage/winding	inductance	4.5±20% mH		
weight	约180g	Holding moment	80mN. m		
Step size	0.01MM	Moment of inertia	约12g. cm²		

外形尺寸：unit=mm



一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3							
材 质 MATERIAL								KST-28D25-02GC-200-0001	
表面处理 FINISH									
		改版 SYM	年 月 日 DATE	变更图号 REVISION NO.	变更事项 REVISIONS	设 计 BY	备 注 NOTE		
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	检 印 CHECKED	比 例 SCALE	FREE	品 名 TITLE	电机规格书 MOTR SPECIFICATION		三角法 THIRD ANGLE PROJECTION
东莞凯福 18-07-29 许元好	东莞凯福 18-07-29 许元好					图 号 DWG. NO.	Y-18-0729-0		
东莞市凯福电子科技有限公司							页 SHEET	1/1	