

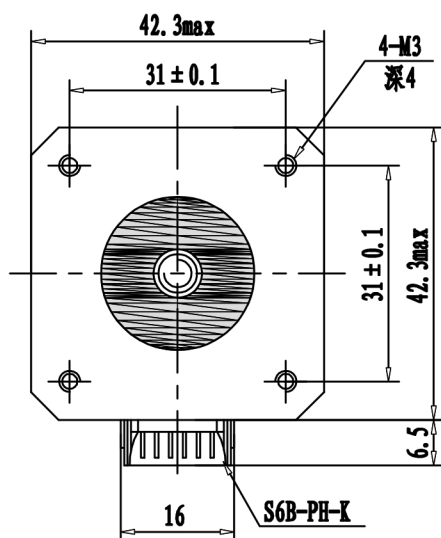


1		2		3		4	
General technical parameter		Electrical technical parameter		Wiring diagram			
Stepping Angle	1. 8°	Rated voltage	24V DC				
Phase number	2	Rated current	1. 5A				
Insulation resistance	100M Ω MIN (500V DC)	resistance	1. 85 ± 15% Ω				
Insulation class	B stage/winding	inductance	1. 9 ± 20% mH				
weight	约200g	Holding moment	260mN. m				
Step size	0. 01MM	Moment of inertia	约38g. cm²				


外形尺寸: unit=mm

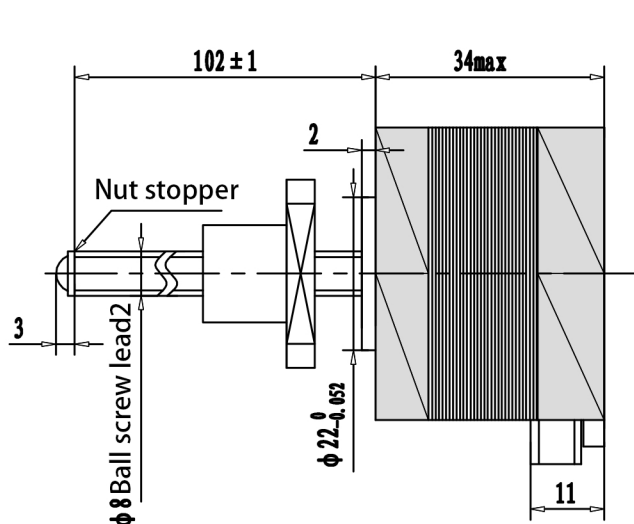

Ball screw nut:

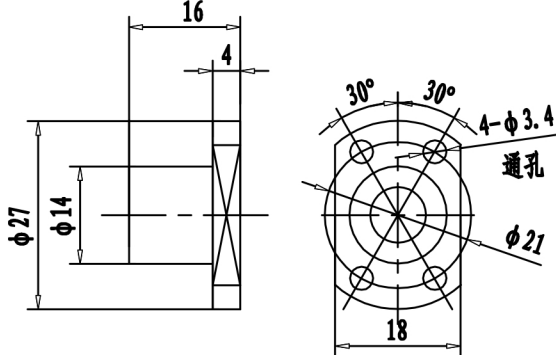

Harness assembly:

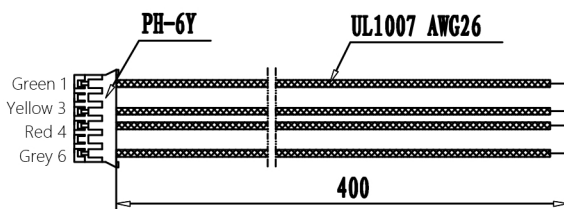

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3							
材 质 MATERIAL								KST-42D16-02GZ-102-0003	
		02	25-02-11	----	线色线序变更	黎明勇			
表面处理 FINISH								备 注 NOTE	
		01	25-01-15	----	电阻电感变更	黎明勇			
		改版 SYM	年 月 日 DATE	变更图号 REVTSN NO.	变更事项 REVTSN	设 计 BY			
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	检 印 CHECKED	比 例 SCALE	1:1	品 名 TITLE	电机规格书 MOTR SPECIFICATION		三角法 THIRD ANGLE PROJECTION
						图 号 DWG. NO.	Y-18-0808-1		
广东凯福电子科技有限公司							页 SHEET	1/1	