




1		2		3		4
General technical parameter		Electrical technical parameter		Wiring diagram		
Stepping Angle	1.8°	Rated voltage	24V DC			
Phase number	2	Rated current	1.5A			
Insulation resistance	100MΩ MIN (500V DC)	resistance	1.9±15%Ω			
Insulation class	B stage/winding	inductance	4.5±20% mH			
weight	约350g	Holding moment	400mN.m			
Step size	0.02MM	Moment of inertia	约57g.cm²			

外形尺寸: unit=mm

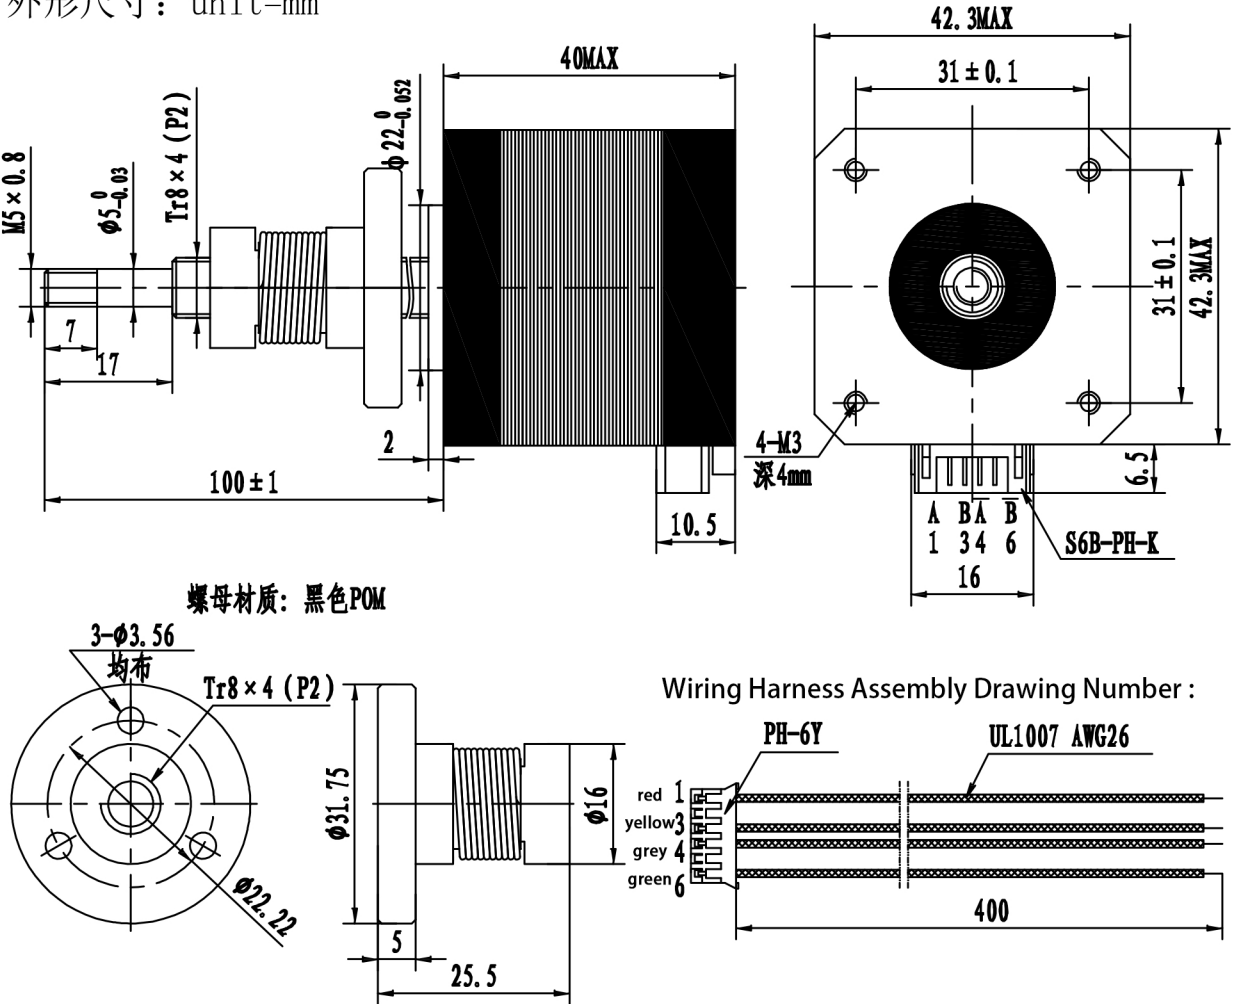

螺母材质: 黑色POM

Wiring Harness Assembly Drawing Number :

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3														
材 质 MATERIAL												KST-42D22-04LC-100X-0007				
表面处理 FINISH				改版 SYM		年 月 日 DATE		变更图号 REVISION NO.		变更事项 REVTSIONS		设 计 BY		备 注 NOTE		
制 图 DRAWN		设 计 DESIGNED		检 图 CHECKED		检 印 CHECKED		比 例 SCALE		品 名 TITLE		电机规格书 MOTR SPECIFICATION			三角法 THIRD ANGLE PROJECTION	
东莞凯福 20-02-19 许元好		东莞凯福 20-02-19 许元好								图 号 DWG. NO.		Y-20-0219-0				
东莞市凯福电子科技有限公司												页 SHEET		1/1		