



| 1General technical parameter |                     | 2Electrical technical parameter |                       | 3Wiring diagram |
|------------------------------|---------------------|---------------------------------|-----------------------|-----------------|
| Stepping Angle               | 1.8°                | Rated voltage                   | 24V DC                |                 |
| Phase number                 | 2                   | Rated current                   | 1.2A                  |                 |
| Insulation resistance        | 100MΩ MIN (500V DC) | resistance                      | 1.9±15% Ω             |                 |
| Insulation class             | B stage/winding     | inductance                      | 4.5±20% mH            |                 |
| weight                       | 约350g               | Holding moment                  | 320mN. m              |                 |
| Step size                    | 0.04MM              | Moment of inertia               | 约57g. cm <sup>2</sup> |                 |

外形尺寸：unit=mm

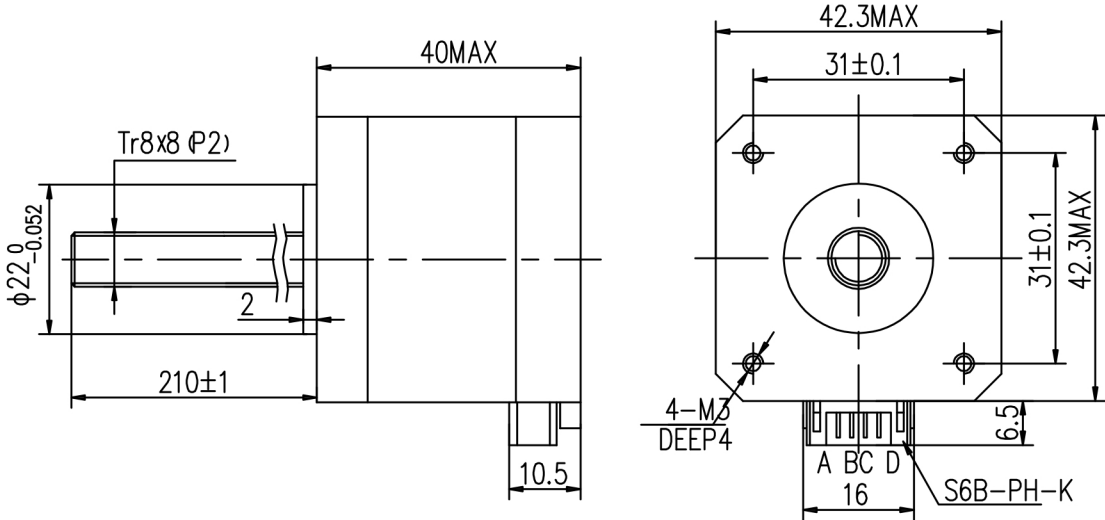

螺帽材质：黑色POM

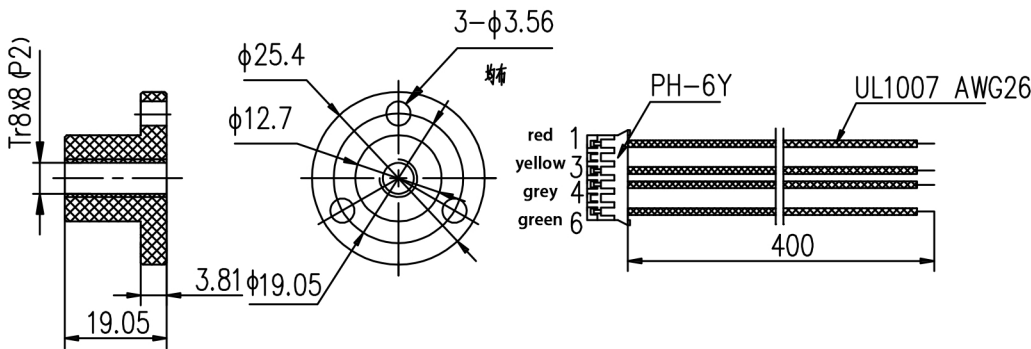

|                                         |  |                 |  |                |  |                |  |                      |  |                                  |  |
|-----------------------------------------|--|-----------------|--|----------------|--|----------------|--|----------------------|--|----------------------------------|--|
| 一般公差<br>TOLERANCES<br>(EXCEPT AS NOTES) |  | ±0.3            |  |                |  |                |  |                      |  |                                  |  |
| 材 质<br>MATERIAL                         |  |                 |  |                |  |                |  |                      |  | KST-42D22-08LC-210-0006          |  |
| 表面处理<br>FINISH                          |  |                 |  | 改版<br>SYM      |  | 年 月 日<br>DATE  |  | 变更图号<br>REVISION NO. |  | 变更事项<br>REVTSIONS                |  |
|                                         |  |                 |  |                |  |                |  |                      |  | 设 计<br>BY                        |  |
| 制 图<br>DRAWN                            |  | 设 计<br>DESIGNED |  | 检 图<br>CHECKED |  | 检 印<br>CHECKED |  | 品 名<br>TITLE         |  | 电机规格书<br>MOTR SPECIFICATION      |  |
| 图 号<br>DWG. NO.                         |  | 比例<br>SCALE     |  | FREE           |  |                |  | 图 号<br>DWG. NO.      |  | Y-18-0725-0                      |  |
|                                         |  |                 |  |                |  |                |  |                      |  | 备 注<br>NOTE                      |  |
|                                         |  |                 |  |                |  |                |  |                      |  | 三角法<br>THIRD ANGLE<br>PROJECTION |  |
|                                         |  |                 |  |                |  |                |  |                      |  | 页<br>SHEET                       |  |
|                                         |  |                 |  |                |  |                |  |                      |  | 1/1                              |  |