


A

B


C

D

E

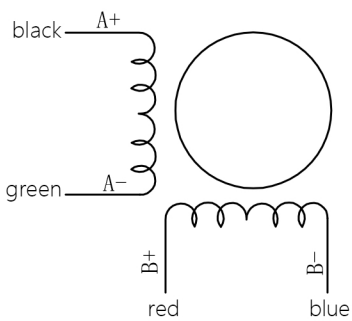1		2		3		4
General technical parameter		Electrical technical parameter		Wiring diagram		
Stepping Angle	1.8°	Rated voltage	24V DC			
Phase number	2	Rated current	3A			
Insulation resistance	100M Ω MIN (500V DC)	resistance	1.1 ± 15% Ω			
Insulation class	B stage/winding	inductance	3.2 ± 20% mH			
weight	约680g	Holding moment	1.3N. m			
Step size	0.02MM	Moment of inertia	约280g. cm²			

外形尺寸：unit=mm

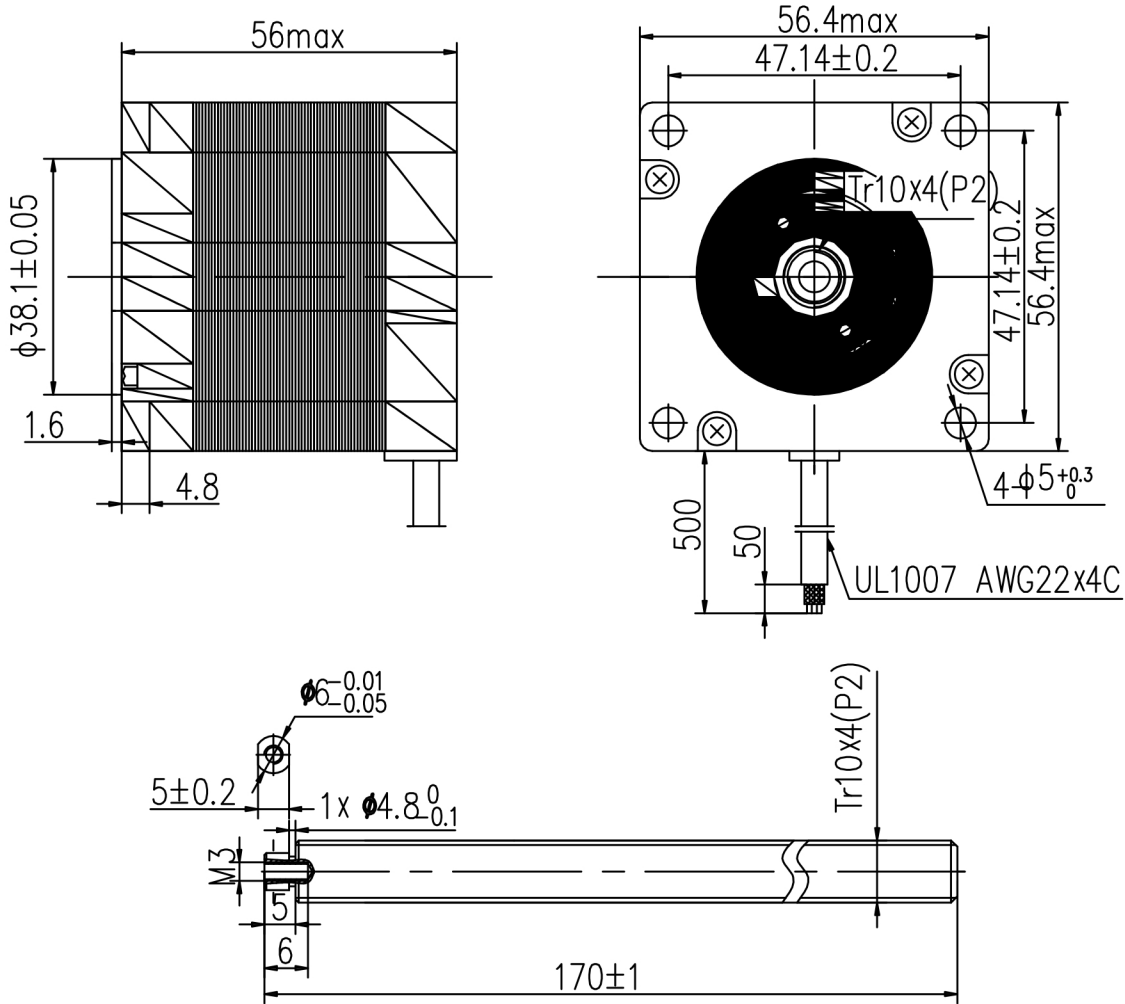

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3							
材 质 MATERIAL								KST-57D33-04GC-170-0018	
表面处理 FINISH				改版 SYM		年 月 日 DATE		变更图号 REVISION NO.	
								变更事项 REVISIONS	
								设 计 BY	
								备 注 NOTE	
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	检 印 CHECKED	比 例 SCALE		品 名 TITLE		电机规格书 MOTR SPECIFICATION	
						图 号 DWG. NO.		Y-18-0801-0	
								三角法 THIRD ANGLE PROJECTION	
								页 SHEET	
								1/1	