


1		2		3		4	
General technical parameter		Electrical technical parameter		Wiring diagram			
Stepping Angle	1. 8°	Rated voltage	3. 6V DC				
Phase number	2	Rated current	3A				
Insulation resistance	100M Ω MIN (500V DC)	resistance	1. 2 ± 15% Ω				
Insulation class	B stage/winding	inductance	12 ± 20% mH				
weight	约2Kg	Holding moment	4N. m				
Step size	0. 015MM	Moment of inertia	约1400g. cm²				

外形尺寸：unit=mm

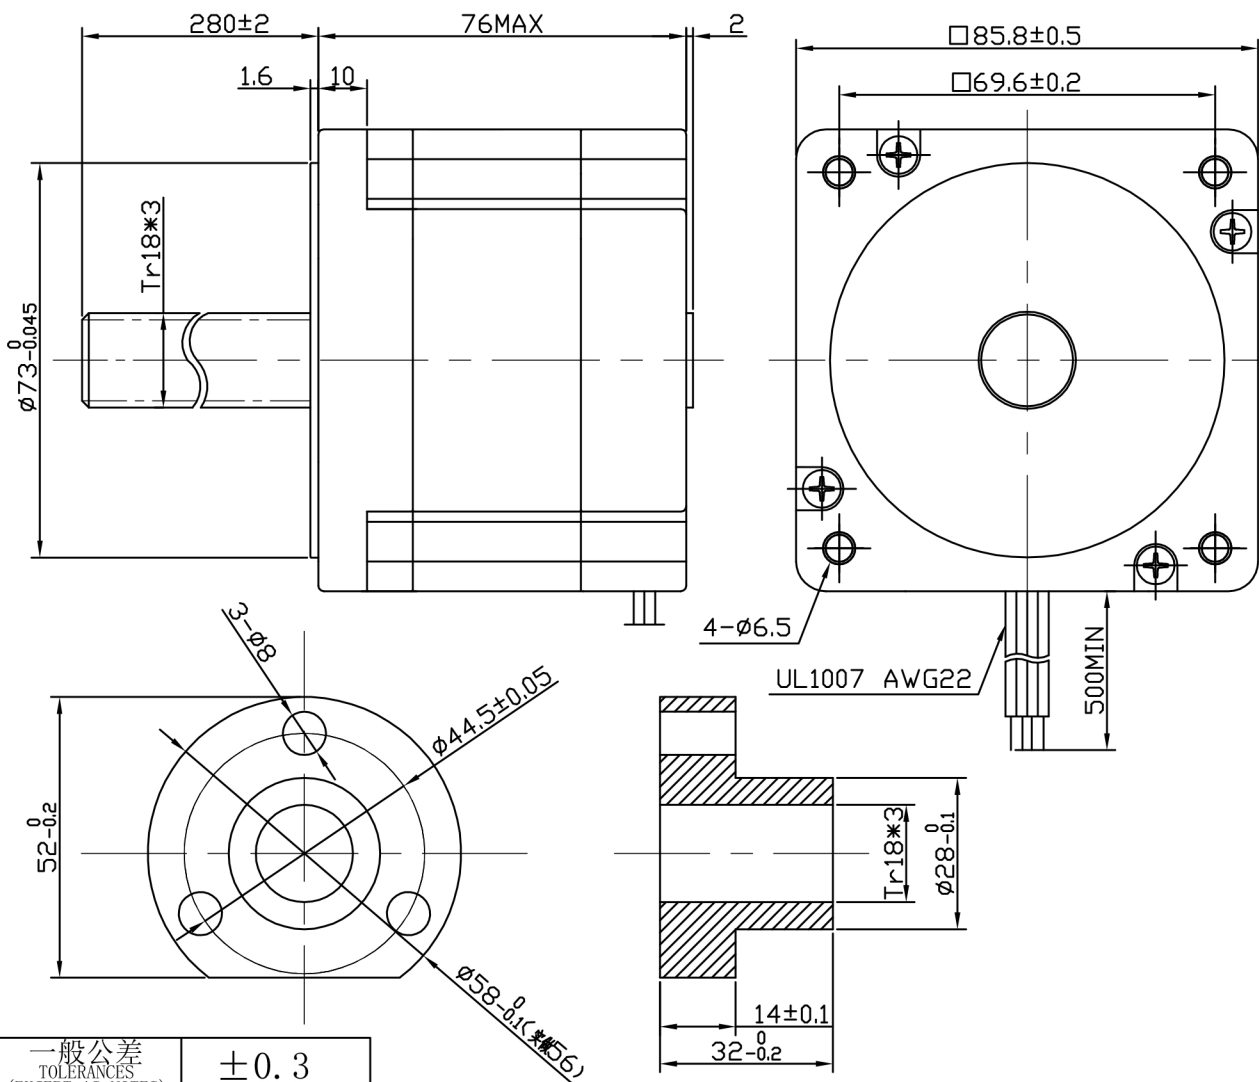

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3		32 ⁺⁰ _{-0.2}				
材 质 MATERIAL						KST-86D45-03LC-280-0002		
表面处理 FINISH								
		改版 SYM	年 月 日 DATE	变更图号 REVISION NO.	变更事项 REVISIONS	设 计 BY	备 注 NOTE	
制 图 DRAW	设 计 DESIGNED	检 图 CHECKED	检 印 CHECKED	比 例 SCALE	FREE	品 名 TITLE	电机规格书 MOTR SPECIFICATION	三角法 THIRD ANGLE PROJECTION
						图 号 DWG. NO.	Y-18-0727-0	
				东莞市凯福电子科技有限公司				