





1		2		3		4
General technical parameter		Electrical technical parameter		Wiring diagram		
Stepping Angle	1.8°	Rated voltage	3.9V DC			
Phase number	2	Rated current	0.6A			
Insulation resistance	100MΩ MIN (500V DC)	resistance	6.5±15% Ω			
Insulation class	B stage/winding	inductance	1.7±20% mH			
weight	约60g	Holding moment	18mN. m			
Step size	0.01MM	Moment of inertia	约2g. cm²			

外形尺寸：unit=mm

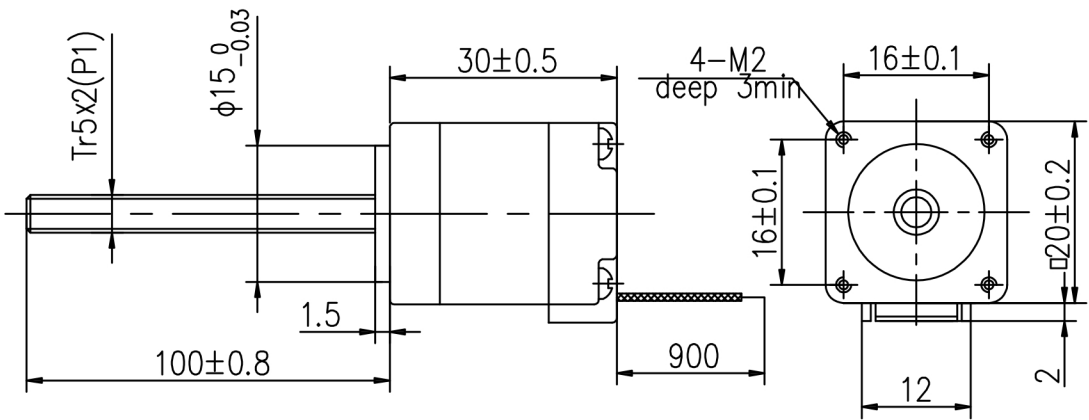

Material: POM

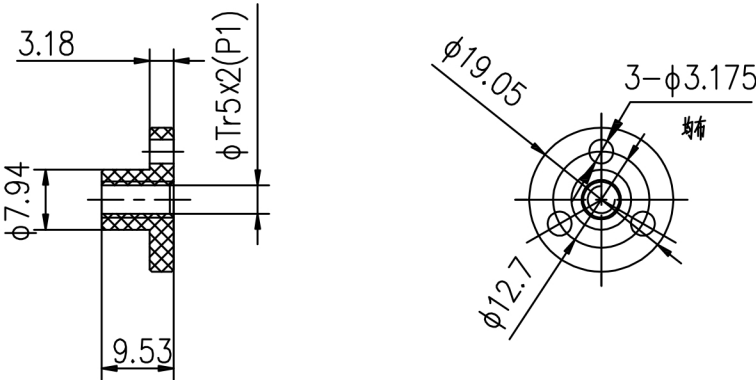

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3							
材 质 MATERIAL							KST-20D15-02LC-100-0002		
表面处理 FINISH									
		改版 SYM	年 月 日 DATE	变更图号 REVISION NO.	变更事项 REVISIONS	设 计 BY	备 注	NOTE	
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	检 印 CHECKED	比 例 SCALE	FREE	品 名 TITLE	电机规格书 MOTR SPECIFICATION		三角法 THIRD ANGLE PROJECTION
						图 号 DWG. NO.	Y-18-0723-0		
东莞市凯福电子科技有限公司							页 SHEET	1/1	