
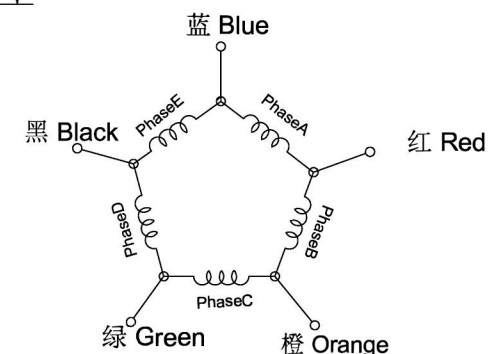
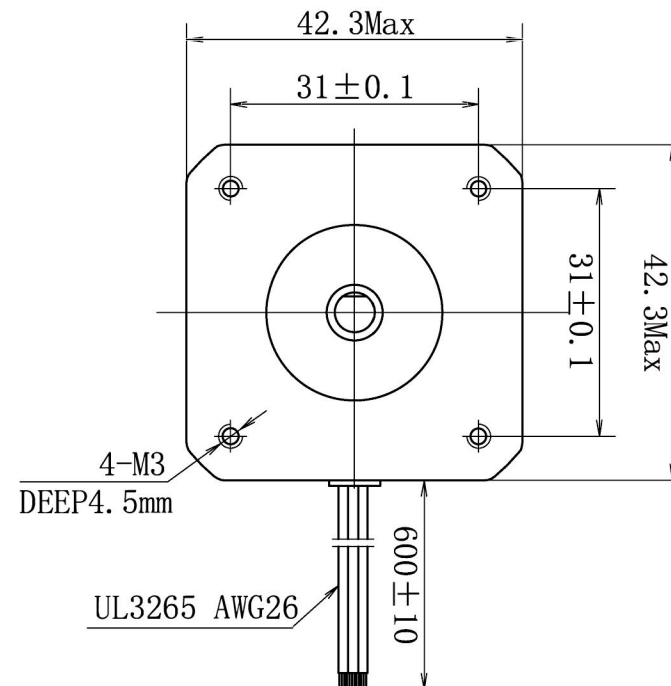
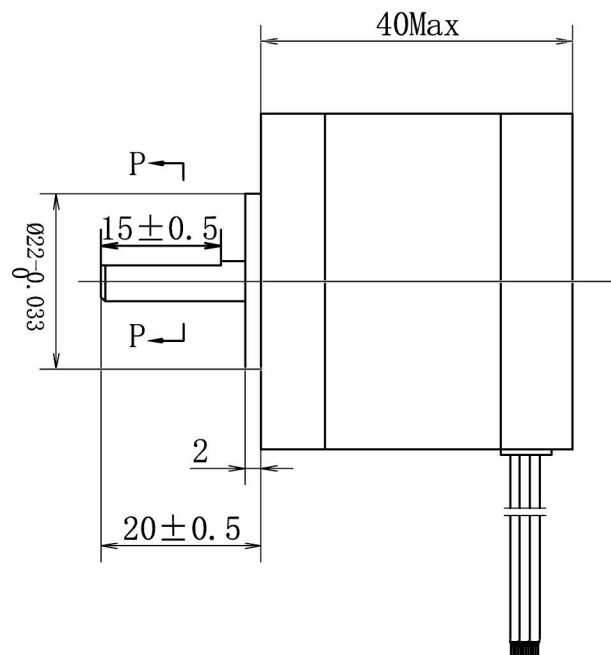




General Parameters

Step angle	0.72°
Number of phases	5
Insulation resistance	100MΩ min. (500V DC)
Insulation grade	Class B
Insulation withstand voltage	500V A.C 1 minute
Drive voltage	24V
Rated current	0.75 A/phase
Phase resistance	1.5Ω ±10% AT25°
Phase inductance	1.4 mH±20% AT 1KHz, 1Vrms
Holding torque	0.15N.m
Rotor inertia	54 g.cm ²
Weight	0.28 Kg

一般公差 TOLERANCES (EXCEPT AS NOTES)		±0.3					
材 质 MATERIAL		2					
表面处理 FINISH		1					
制图 DRAWN	设计 DESIGNED	检 图 CHECKED	检 印 CHECKED	比例 SCALE	FREE	品 名 TITLE	电机规格书 MOTR SPECIFICATION
						图 号 DWG. NO.	Y-23-1102-1
广东凯福电子科技有限公司 GUANGDONG KAIFULL CO., LTD.						页 SHEET	1/1

KST-42B22-0001

备 注 NOTE