


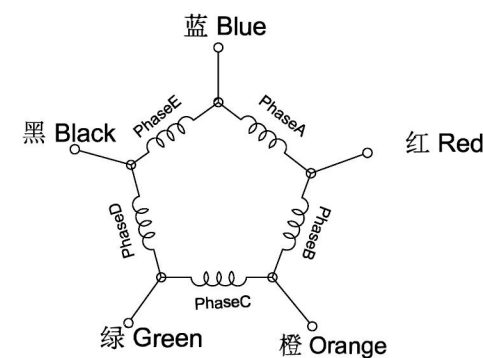

Step angle	0.72°
Number of phases	5
Insulation resistance	100MΩ _{min.} (500V DC)
Insulation grade	Class B
Insulation withstand voltage	500V A.C 1minute
Drive voltage	24V
Rated current	0.75 A/phase
Phase resistance	1.9Ω ±10% AT25°
Phase inductance	1.6 mH±20% AT 1KHz, 1V _{rms}
Holding torque	0.24N.m
Rotor inertia	68 g.cm ²
Weight	0.36 Kg

一般公差 TOLERANCES (EXCEPT AS NOTED)		±0.3													
材 质 MATERIAL		— — —		2										KST-42B30-D-0002	
				1											
		0		23-07-11		— — —		00初版		于柯					
表面处理 FINISH		— — —		改版 SYM		年 月 日 DATE		变更票图号 REVISION NO.		变 更 事 项 REVISIONS		设计 BY		备 注 NOTE	
制 图 DRAWN	设 计 DESIGNED	检 图 CHECKED	检 印 CHECKED	比 例 SCALE		FREE		品 名 TITLE		电机规格书 MOTR SPECIFICATION					
								图 号 DWG. NO.		Y-23-1102-1					
				广东凯福电子科技有限公司				GUANGDONG KAIFULL CO., LTD.				页 SHEET		1/1	