
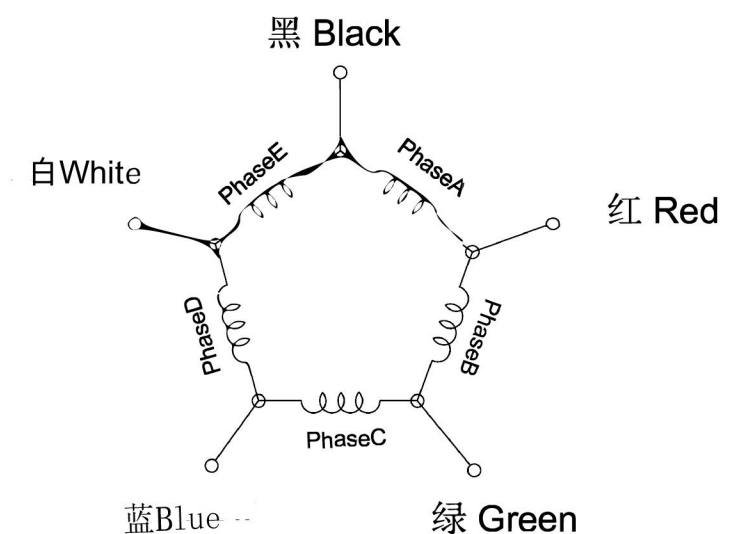
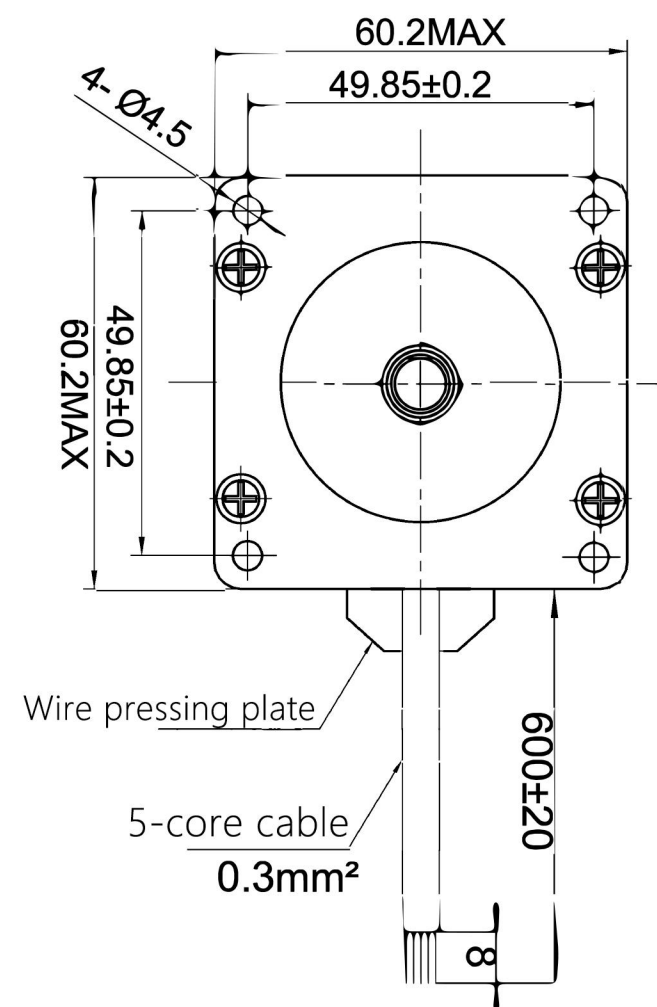


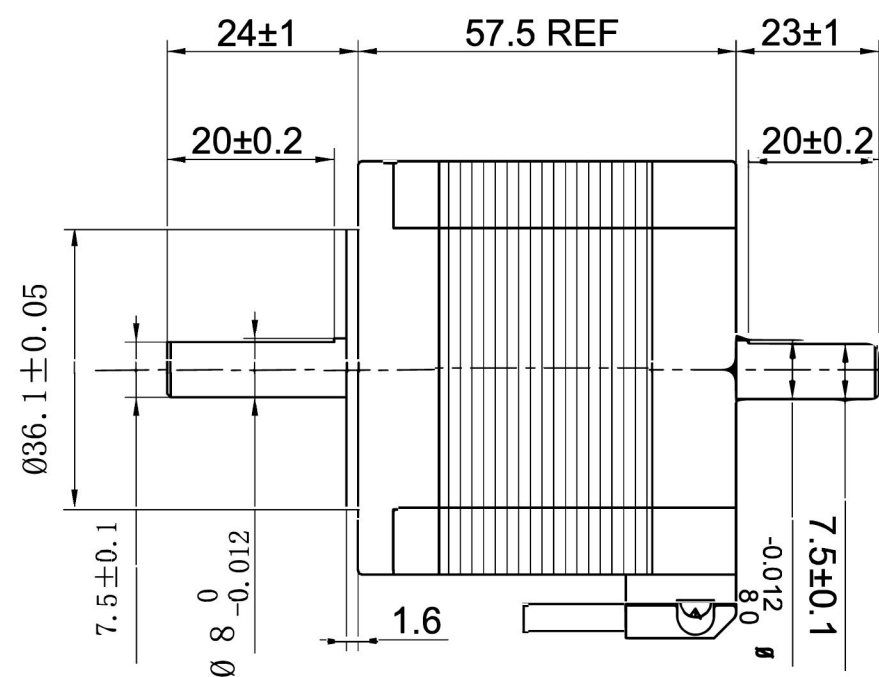

| General Parameters           |                                 |
|------------------------------|---------------------------------|
| Step angle                   | 0.72°                           |
| Number of phases             | 5                               |
| Insulation resistance        | 100MΩ <sub>min.</sub> (500V DC) |
| Insulation grade             | Class B                         |
| Insulation withstand voltage | 500V A.C 1minute                |
| Drive voltage                | 24V                             |
| Rated current                | 1.5 A/phase                     |
| Phase resistance             | 3.0±10% AT25°                   |
| Phase inductance             | 7.3 mH±20% AT 1KHz, 1Vrms       |
| Holding torque               | 0.8 N.m                         |
| Rotor inertia                | 260g.cm <sup>2</sup>            |
| Weight                       | 0.7 Kg                          |

|                                         |                 |                |                |                                          |                      |                 |                             |                |
|-----------------------------------------|-----------------|----------------|----------------|------------------------------------------|----------------------|-----------------|-----------------------------|----------------|
| 一般公差<br>TOLERANCES<br>(EXCEPT AS NOTES) |                 | ±0.3           |                |                                          |                      |                 |                             |                |
| 材 质<br>MATERIAL                         | ————            | 2              |                |                                          |                      |                 | KST-60B35-D-0001            |                |
|                                         |                 | 1              |                | ----                                     |                      |                 |                             |                |
| 表面处理<br>FINISH                          | ————            | 0              | 23-07-11       | ----                                     | 00初版                 | 于轲              |                             |                |
|                                         |                 | 改版<br>SYM      | 年 月 日<br>DATE  | 变更票图号<br>REVISION NO.                    | 变 更 事 项<br>REVISIONS | 设计<br>BY        | 备 注<br>NOTE                 |                |
| 制 图<br>DRAWN                            | 设 计<br>DESIGNED | 检 图<br>CHECKED | 检 印<br>CHECKED | 比 例<br>SCALE                             | FREE                 | 品 名<br>TITLE    | 电机规格书<br>MOTR SPECIFICATION |                |
|                                         |                 |                |                |                                          |                      | 图 号<br>DWG. NO. | Y-23-1102-1                 |                |
|                                         |                 |                |                | 广东凯福电子科技有限公司 GUANGDONG KAIFULL CO., LTD. |                      |                 |                             | 页<br>SHEET 1/1 |