


Type	Electric Linear Stage
Stroke (mm)	60
Lead (mm)	6
Repeat positioning accuracy (µm)	±5
Horizontal load (KG)	12
Maximum thrust (N)	60
Screw type	Ball Screw
Screw grade	C5
Motor model	Y07-35D34-3406- 06GZ-138E
Step angle	
Number of phases	For specific
Drive voltage	parameters, please
Rated current	refer to the motor
Resistance	specification
Inductance	
Material	Aluminum alloy
Surface treatment	Anodic color
Main weight (kg)	0.9
Motor Type	35 closed loop
Sensor	Built-in sensor

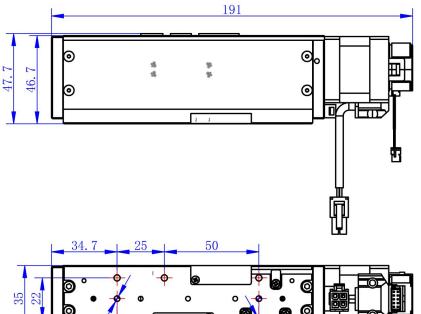

35	25			
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		75±0.03	5-M4x0	). 7 Completely penetrate

			North Control Control	and the second second
Special	Notes:	(For	internal	production)
Special	riotes.	(101	micernai	productions

- 1. This model has a built-in sensor;
- 2. If the customer has no wiring requirements, the wiring will be in accordance with our company's standards

				YK-35D3406-06GZ-60E-I			
				制图	叶振东	页	1/1
				审核		视角	<b>—</b>
				检图		公差	未标注公差12级
序号	日期	更改内容	设计者	广东凯福电子科技有限公司			