


Туре	Electric Linear Stage			
Stroke (mm)	100			
Lead (mm)	6			
Repeat positioning accuracy (µm)	±5			
Horizontal load (KG)	12			
Maximum thrust (N)	60			
Screw type	Ball Screw			
Screw grade	C5			
Motor model	Y07-35D47-4706- 06GZ-178			
Step angle				
Number of phases	For specific			
Drive voltage	parameters, please			
Rated current	refer to the motor			
Resistance	specification			
Inductance	1.			
Material	Aluminum alloy			
Surface treatment	Anodic color			
Main weight (kg)	0.8			
Motor Type	35 Open loop			
Sensor	None			

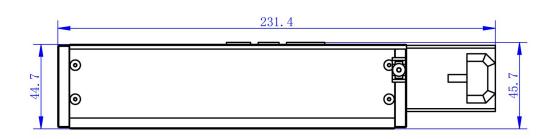

	-		5X25	=125		–		
	29.7	25	12-M4x0.7	<u>7√8</u>		-	n 🗀	=
	9 ° •	*	-	+	•	• • @		
22		+	— - • —		+	* ©		
	42. 2		10	00		2-Ø3	+0. 03 +0. 01 ▼ 4	

Special Notes: (For internal production)

- 1. This model has a built-in sensor;
- 2. If the customer has no wiring requirements, the wiring will be in accordance with our company's standards

				YK-35D4706-06GZ-100				
				制图	叶振东	页	1/1	
				审核		视角	—	
				检图		公差	未标注公差12级	
序号	日期	更改内容	设计者	广东凯福电子科技有限公司				