




Dimension



Application Picture

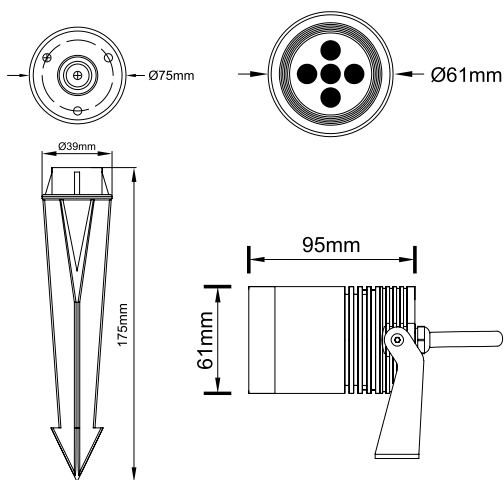

Parameter

General Data	
Item No.	UL-1012-GU10-A
Power	/
LED type	Without GU10 lamp as standard, with GU10 lamp as options.
Luminous flux	for fitting GU10 lamp with totally height 54mm at max [(including pins)]
CCT	/
CRI	/
Beam angle	/
Dimension	61 x 95 (mm) Diameter x Height
Cut out	/
Net weight	0.48 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC 90~265V
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	/
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	anodizing + powder coated painting in dark grey as standard, black or white as options
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass, T=3mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With PVC spike as spike spot lights (Standard)
Round base	With SS304 round base for wall mounting (optional)
Packaging	
Inner box size	130*115*80 mm
Carton size	36.5*28*26cm (18PCS each carton)



IP67 IK04

Passivated


3 Years Warranty



PLAYLITE®



Dimension

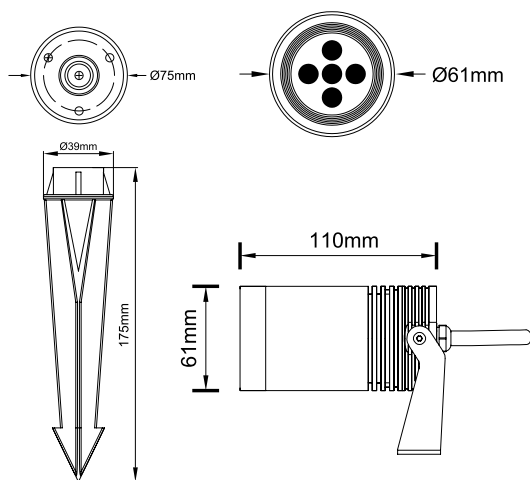

Parameter

General Data	
Item No.	UL-1012-GU10-A-70
Power	/
LED type	Without GU10 lamp as standard, with GU10 lamp as options.
Luminous flux	for fitting GU10 lamp with totally height 70mm at max (including pins)
CCT	/
CRI	/
Beam angle	/
Dimension	61 x 110 (mm) Diameter x Height
Cut out	/
Net weight	0.53 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC 90~265V
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	/
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	anodizing + powder coated painting in dark grey as standard, black or white as options
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass, T=3mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With PVC spike as spike spot lights (Standard)
Round base	With SS304 round base for wall mounting (optional)
Packaging	
Inner box size	130*115*80 mm
Carton size	36.5*28*26cm (18PCS each carton)



Application Picture






PLAYLITE®



Dimension

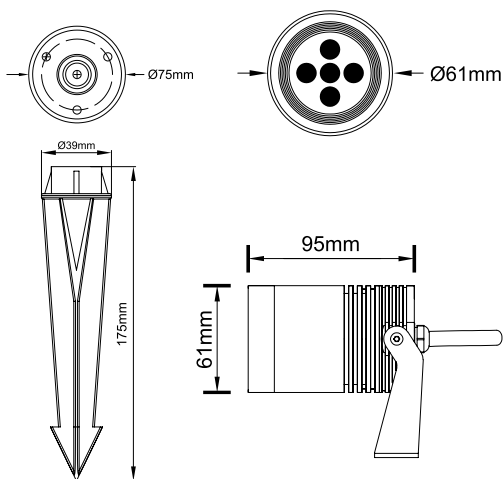

Parameter

General Data	
Item No.	UL-1012-MR16-A-54
Power	/
LED type	Without MR16 lamp as standard, with MR16 lamp as options.
Luminous flux	for fitting MR16 lamp with totally height 54mm at max (including pins)
CCT	/
CRI	/
Beam angle	/
Dimension	61 x 95 (mm) Diameter x Height
Cut out	/
Net weight	0.53 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	/
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	anodizing + powder coated painting in dark grey as standard, black or white as options
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass, T=3mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With PVC spike as spike spot lights (Standard)
Round base	With SS304 round base for wall mounting (optional)
Packaging	
Inner box size	130*115*80 mm
Carton size	36.5*28*26cm (18PCS each carton)



IP67 IK04

Passivated

3 Years Warranty

Application Picture

