



Indoor Luminaire Photometric Data

Description Information

Luminary Name: 55252		Lum. Catalog:	Test ID:
Lamp Name:		Lamp Catalog:	Test Date: 2024/03/01
Manufacture:		Shld. Ang(°):	Test Machine:GON-2000
Test Lab:		Frequency (Hz):	Lamp CCT(K): 2700 Ra: 80
Lum. Size(W*L*H):0.050m*-0.050m*0.000m		Lum. Area(m2):0.002	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=30.0 γ=1.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 515.400	Luminary Flux(lm): 515.401	Field Angle(10%Imax): 49.5(°)
Rated Power(W): 6	Luminary Efficiency: 100.00%	Down Lumens&Percent: 515.401lm 100.00%
Rated Voltage(V): 220	Luminary EER(lm/W): 87.504	Up Lumens&Percent: 0.000lm 0.00%
Tested Power(W): 5.890	Max. Candela(cd): 1600.364	S/MH: C0_a180=0.585 C90_270=0.595
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=1.0	CIE Type: Semi-Direct
Tested Electrics(V, A, pf):221.2, 0.052, 0.510	Beam Angle(50%Imax): 34.4(°)	ErP Φ use(90°): 515.443lm
Lamp Size(W*L*H):0.050m*-0.050m*0.000m	Left=-18.8°, Right=15.7°	IRF(%): 651.700

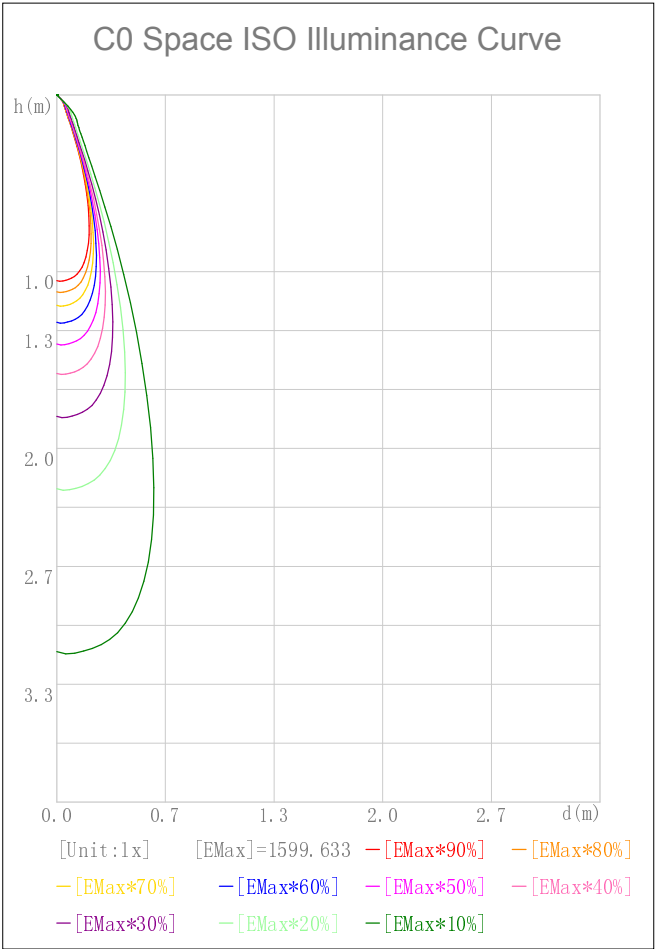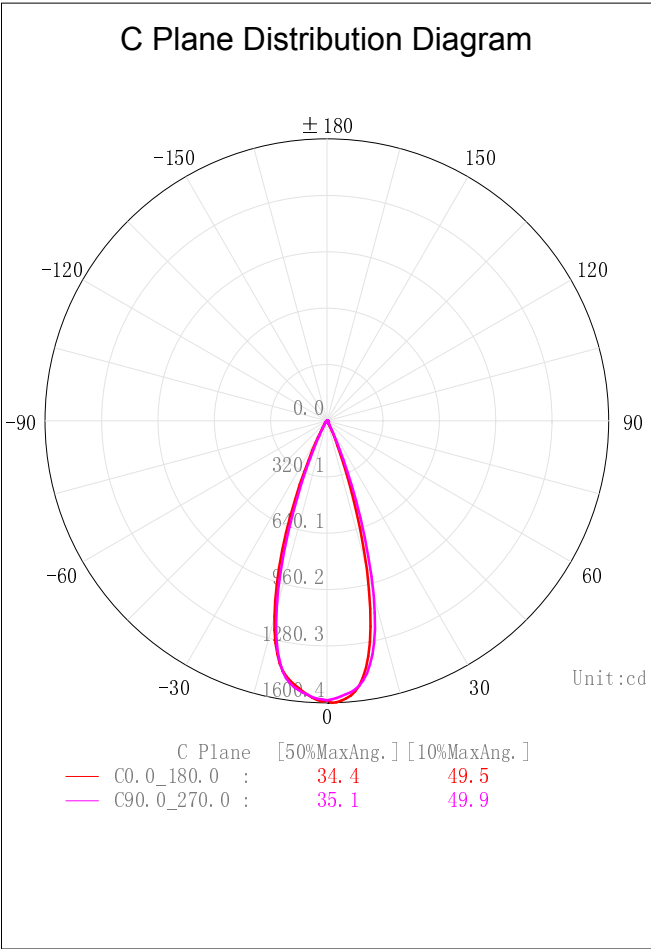

2D Plane Light Intensity Distribution Curve


Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/03/01

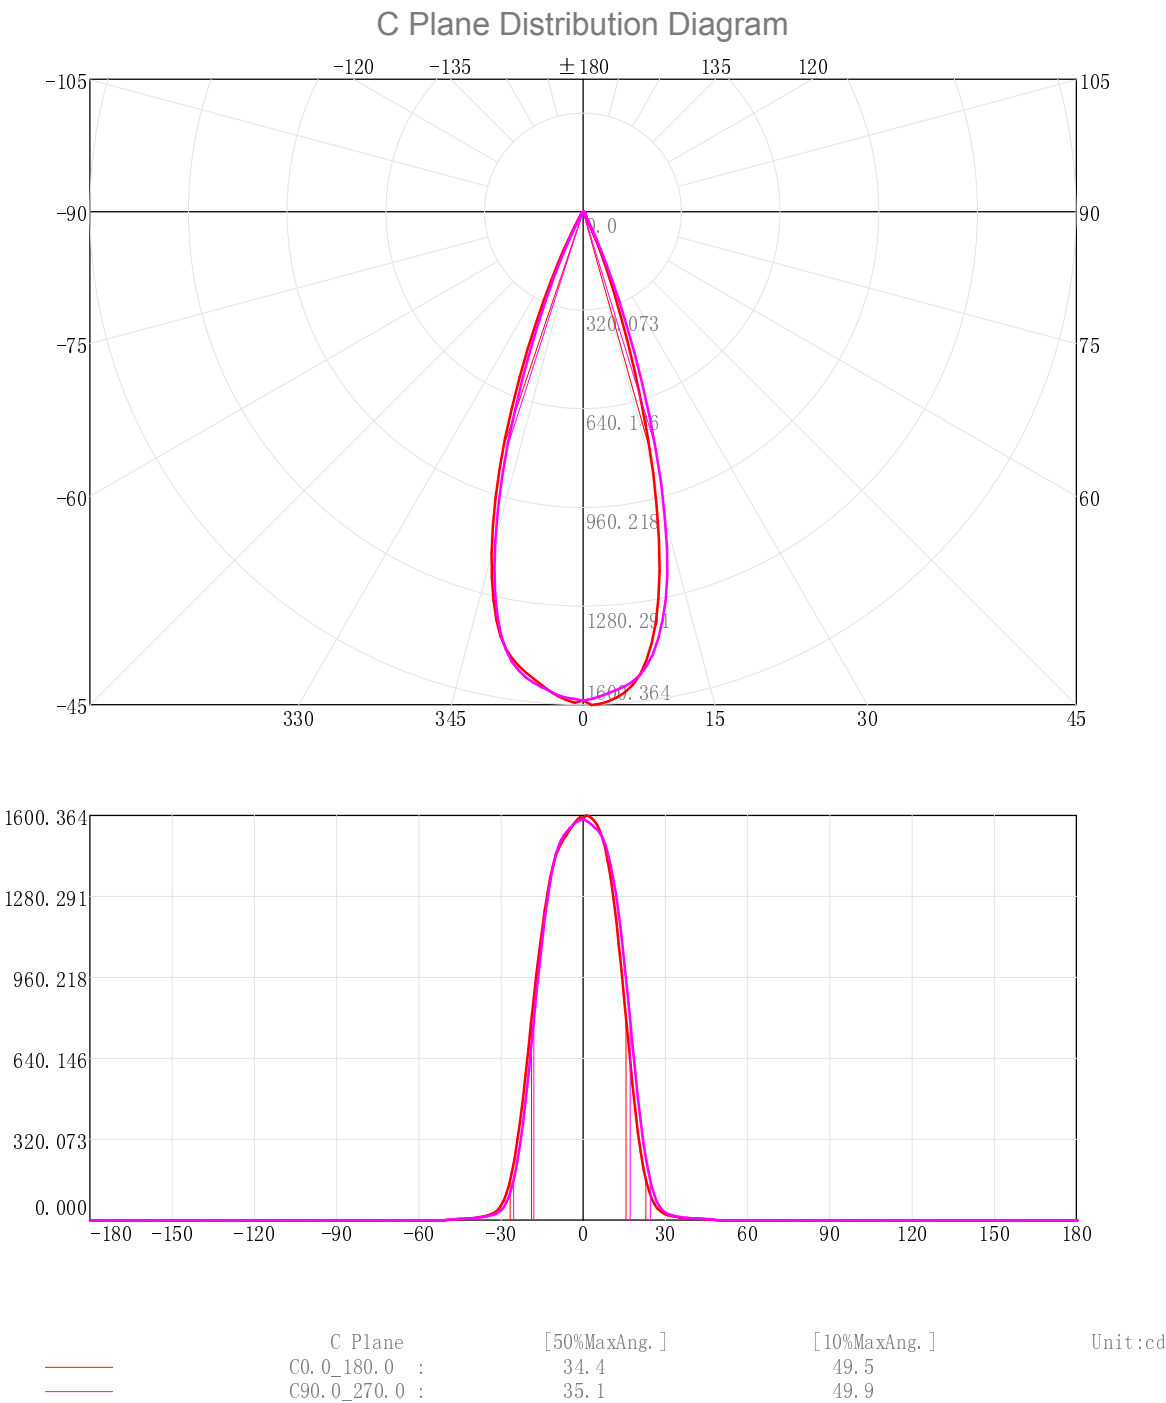

3D Light Intensity Distribution Modal

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/03/01

3D Light Intensity Distribution Modal

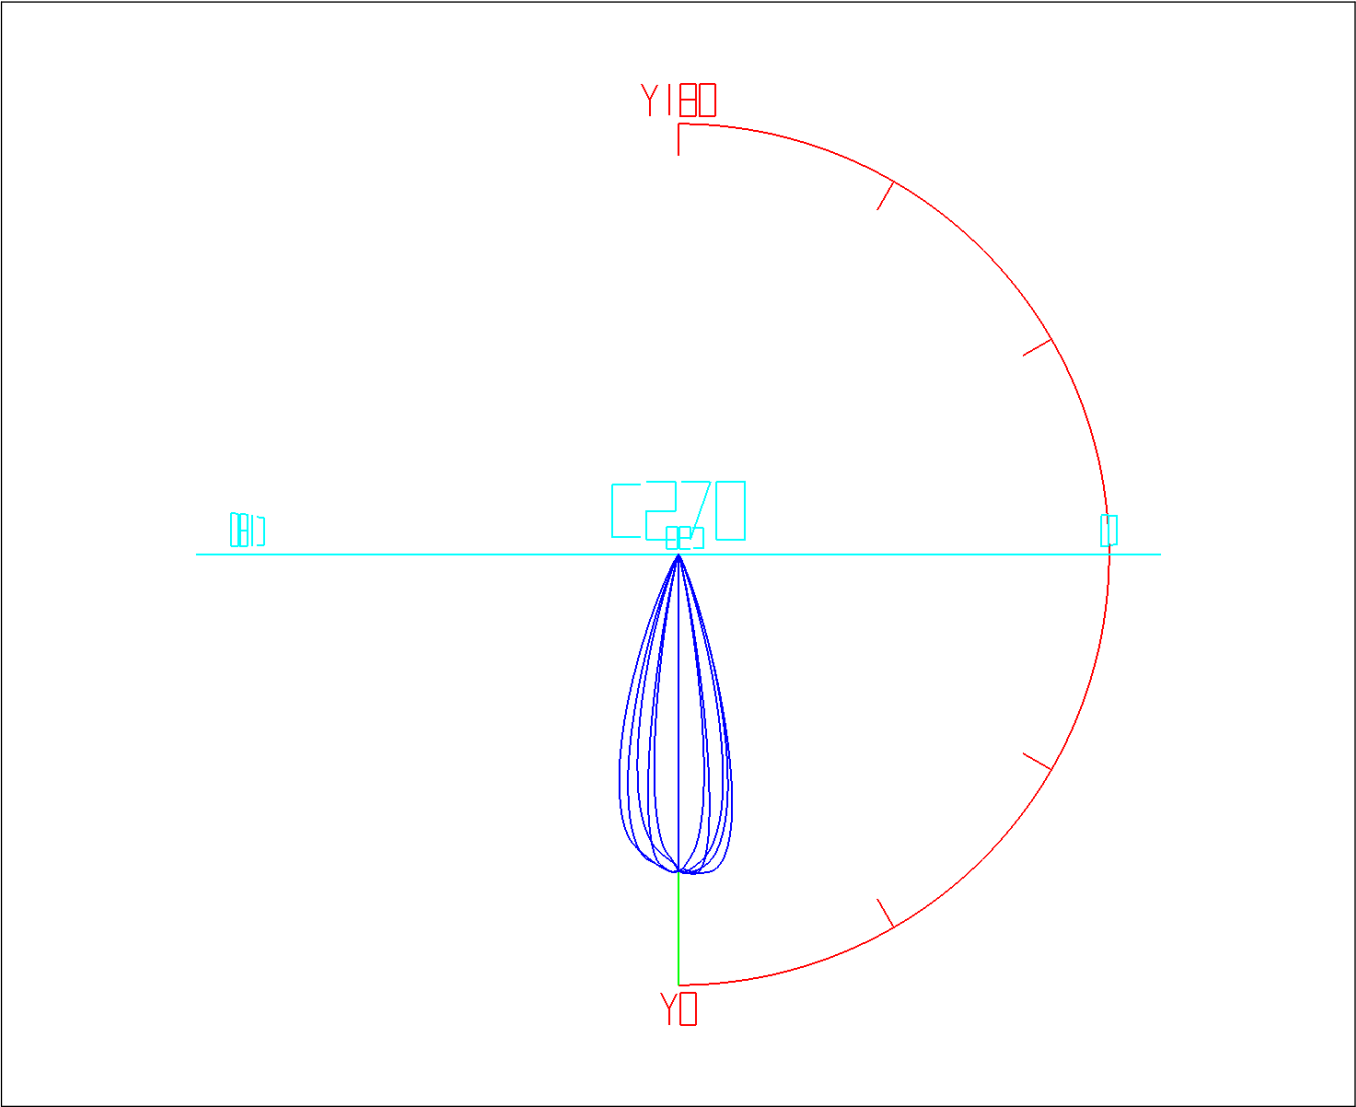

Curves:

View Angles:

3D Model

Orient:0

Fixture

Tilt:0

Vert. HUD

Roll:0

Hori. HUD

Spin:0

Photometric Filename:UL-6W-COB-0600-CH-透镜36度-2700K.IES

Zone(γ)	Zone Flux (1m)	Sums Flux (1m)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (1m)	Sums Flux (1m)	Zone%Lamp	Sums%Lamp
0.0-1.0	1.52	1.52	0.29	0.29	47.0-48.0	0.22	515.15	0.04	99.95
1.0-2.0	4.53	6.05	0.88	1.17	48.0-49.0	0.15	515.30	0.03	99.98
2.0-3.0	7.52	13.58	1.46	2.63	49.0-50.0	0.08	515.37	0.01	99.99
3.0-4.0	10.47	24.05	2.03	4.67	50.0-51.0	0.03	515.40	0.00	100.00
4.0-5.0	13.36	37.41	2.59	7.26	51.0-52.0	0.00	515.40	0.00	100.00
5.0-6.0	16.19	53.60	3.14	10.40	52.0-53.0	0.00	515.40	0.00	100.00
6.0-7.0	18.92	72.52	3.67	14.07	53.0-54.0	0.00	515.40	0.00	100.00
7.0-8.0	21.49	94.02	4.17	18.24	54.0-55.0	0.00	515.40	0.00	100.00
8.0-9.0	23.85	117.86	4.63	22.87	55.0-56.0	0.00	515.40	0.00	100.00
9.0-10.0	25.92	143.78	5.03	27.90	56.0-57.0	0.00	515.40	0.00	100.00
10.0-11.0	27.65	171.43	5.36	33.26	57.0-58.0	0.00	515.40	0.00	100.00
11.0-12.0	28.95	200.38	5.62	38.88	58.0-59.0	0.00	515.40	0.00	100.00
12.0-13.0	29.77	230.15	5.78	44.65	59.0-60.0	0.00	515.40	0.00	100.00
13.0-14.0	30.05	260.19	5.83	50.48	60.0-61.0	0.00	515.40	0.00	100.00
14.0-15.0	29.76	289.95	5.77	56.26	61.0-62.0	0.00	515.40	0.00	100.00
15.0-16.0	28.89	318.84	5.60	61.86	62.0-63.0	0.00	515.40	0.00	100.00
16.0-17.0	27.47	346.31	5.33	67.19	63.0-64.0	0.00	515.40	0.00	100.00
17.0-18.0	25.57	371.88	4.96	72.15	64.0-65.0	0.00	515.40	0.00	100.00
18.0-19.0	23.28	395.16	4.52	76.67	65.0-66.0	0.00	515.40	0.00	100.00
19.0-20.0	20.72	415.88	4.02	80.69	66.0-67.0	0.00	515.40	0.00	100.00
20.0-21.0	18.03	433.91	3.50	84.19	67.0-68.0	0.00	515.40	0.00	100.00
21.0-22.0	15.33	449.24	2.97	87.16	68.0-69.0	0.00	515.40	0.00	100.00
22.0-23.0	12.74	461.98	2.47	89.63	69.0-70.0	0.00	515.40	0.00	100.00
23.0-24.0	10.36	472.34	2.01	91.65	70.0-71.0	0.00	515.40	0.00	100.00
24.0-25.0	8.24	480.58	1.60	93.24	71.0-72.0	0.00	515.40	0.00	100.00
25.0-26.0	6.44	487.02	1.25	94.49	72.0-73.0	0.00	515.40	0.00	100.00
26.0-27.0	4.97	491.99	0.96	95.46	73.0-74.0	0.00	515.40	0.00	100.00
27.0-28.0	3.81	495.81	0.74	96.20	74.0-75.0	0.00	515.40	0.00	100.00
28.0-29.0	2.93	498.74	0.57	96.77	75.0-76.0	0.00	515.40	0.00	100.00
29.0-30.0	2.30	501.04	0.45	97.21	76.0-77.0	0.00	515.40	0.00	100.00
30.0-31.0	1.85	502.88	0.36	97.57	77.0-78.0	0.00	515.40	0.00	100.00
31.0-32.0	1.54	504.42	0.30	97.87	78.0-79.0	0.00	515.40	0.00	100.00
32.0-33.0	1.32	505.75	0.26	98.13	79.0-80.0	0.00	515.40	0.00	100.00
33.0-34.0	1.16	506.91	0.23	98.35	80.0-81.0	0.00	515.40	0.00	100.00
34.0-35.0	1.03	507.94	0.20	98.55	81.0-82.0	0.00	515.40	0.00	100.00
35.0-36.0	0.92	508.85	0.18	98.73	82.0-83.0	0.00	515.40	0.00	100.00
36.0-3									

IES Indoor Report


Photometric Filename:UL-6W-COB-0600-CH-透镜36度-2700K.IES

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	515.40	0.00	100.00	141.0-142.0	0.00	515.40	0.00	100.00
95.0-96.0	0.00	515.40	0.00	100.00	142.0-143.0	0.00	515.40	0.00	100.00
96.0-97.0	0.00	515.40	0.00	100.00	143.0-144.0	0.00	515.40	0.00	100.00
97.0-98.0	0.00	515.40	0.00	100.00	144.0-145.0	0.00	515.40	0.00	100.00
98.0-99.0	0.00	515.40	0.00	100.00	145.0-146.0	0.00	515.40	0.00	100.00
99.0-100.0	0.00	515.40	0.00	100.00	146.0-147.0	0.00	515.40	0.00	100.00
100.0-101.0	0.00	515.40	0.00	100.00	147.0-148.0	0.00	515.40	0.00	100.00
101.0-102.0	0.00	515.40	0.00	100.00	148.0-149.0	0.00	515.40	0.00	100.00
102.0-103.0	0.00	515.40	0.00	100.00	149.0-150.0	0.00	515.40	0.00	100.00
103.0-104.0	0.00	515.40	0.00	100.00	150.0-151.0	0.00	515.40	0.00	100.00
104.0-105.0	0.00	515.40	0.00	100.00	151.0-152.0	0.00	515.40	0.00	100.00
105.0-106.0	0.00	515.40	0.00	100.00	152.0-153.0	0.00	515.40	0.00	100.00
106.0-107.0	0.00	515.40	0.00	100.00	153.0-154.0	0.00	515.40	0.00	100.00
107.0-108.0	0.00	515.40	0.00	100.00	154.0-155.0	0.00	515.40	0.00	100.00
108.0-109.0	0.00	515.40	0.00	100.00	155.0-156.0	0.00	515.40	0.00	100.00
109.0-110.0	0.00	515.40	0.00	100.00	156.0-157.0	0.00	515.40	0.00	100.00
110.0-111.0	0.00	515.40	0.00	100.00	157.0-158.0	0.00	515.40	0.00	100.00
111.0-112.0	0.00	515.40	0.00	100.00	158.0-159.0	0.00	515.40	0.00	100.00
112.0-113.0	0.00	515.40	0.00	100.00	159.0-160.0	0.00	515.40	0.00	100.00
113.0-114.0	0.00	515.40	0.00	100.00	160.0-161.0	0.00	515.40	0.00	100.00
114.0-115.0	0.00	515.40	0.00	100.00	161.0-162.0	0.00	515.40	0.00	100.00
115.0-116.0	0.00	515.40	0.00	100.00	162.0-163.0	0.00	515.40	0.00	100.00
116.0-117.0	0.00	515.40	0.00	100.00	163.0-164.0	0.00	515.40	0.00	100.00
117.0-118.0	0.00	515.40	0.00	100.00	164.0-165.0	0.00	515.40	0.00	100.00
118.0-119.0	0.00	515.40	0.00	100.00	165.0-166.0	0.00	515.40	0.00	100.00
119.0-120.0	0.00	515.40	0.00	100.00	166.0-167.0	0.00	515.40	0.00	100.00
120.0-121.0	0.00	515.40	0.00	100.00	167.0-168.0	0.00	515.40	0.00	100.00
121.0-122.0	0.00	515.40	0.00	100.00	168.0-169.0	0.00	515.40	0.00	100.00
122.0-123.0	0.00	515.40	0.00	100.00	169.0-170.0	0.00	515.40	0.00	100.00
123.0-124.0	0.00	515.40	0.00	100.00	170.0-171.0	0.00	515.40	0.00	100.00
124.0-125.0	0.00	515.40	0.00	100.00	171.0-172.0	0.00	515.40	0.00	100.00
125.0-126.0	0.00	515.40	0.00	100.00	172.0-173.0	0.00	515.40	0.00	100.00
126.0-127.0	0.00	515.40	0.00	100.00	173.0-174.0	0.00	515.40	0.00	100.00
127.0-128.0	0.00	515.40	0.00	100.00	174.0-175.0	0.00	515.40	0.00	100.00
128.0-129.0	0.00	515.40	0.00	100.00	175.0-176.0	0.00	515.40	0.00	100.00
129.0-130.0	0.00	515.40	0.00	100.00	176.0-177.0	0.00	515.40	0.00	100.00
130.0-131.0	0.00	515.40	0.00	100.00	177.0-178.0	0.00	515.40	0.00	100.00
131.0-132.0	0.00	515.40	0.00	100.00	178.0-179.0	0.00	515.40	0.00	100.00
132.0-133.0	0.00	515.40	0.00	100.00	179.0-180.0	0.00	515.40	0.00	100.00
133.0-134.0	0.00	515.40	0.00	100.00					
134.0-135.0	0.00	515.40	0.00	100.00					
135.0-136.0	0.00	515.40	0.00	100.00					
136.0-137.0	0.00	515.40	0.00	100.00					
137.0-138.0	0.00	515.40	0.00	100.00					
138.0-139.0	0.00	515.40	0.00	100.00					
139.0-140.0	0.00	515.40	0.00	100.00					
140.0-141.0	0.00	515.40	0.00	100.00					

Rectangle ISO Lighting Intensity Diagram

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/03/01

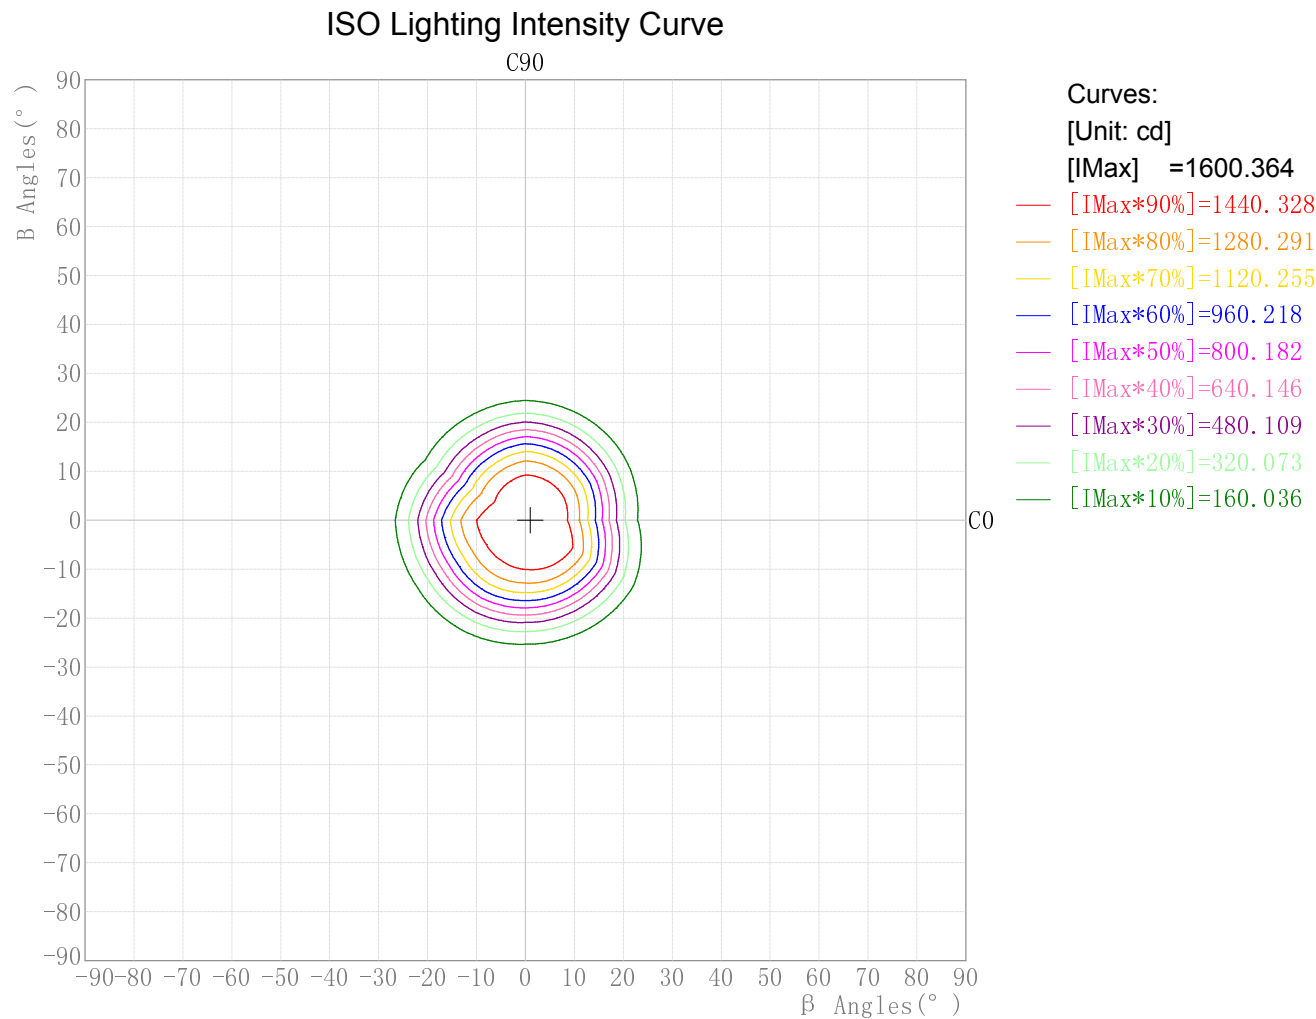


Maximum Light Intensity(cd): 1600.36
Maximum Cand.@Angle: H=1.0°,V=0.0°

Photometric Filename:UL-6W-COB-0600-CH-透镜36度-2700K.IES

Plane ISO-Illuminance Diagram

Lum. Name: 55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/03/01

Plane ISO-Illuminance Curve

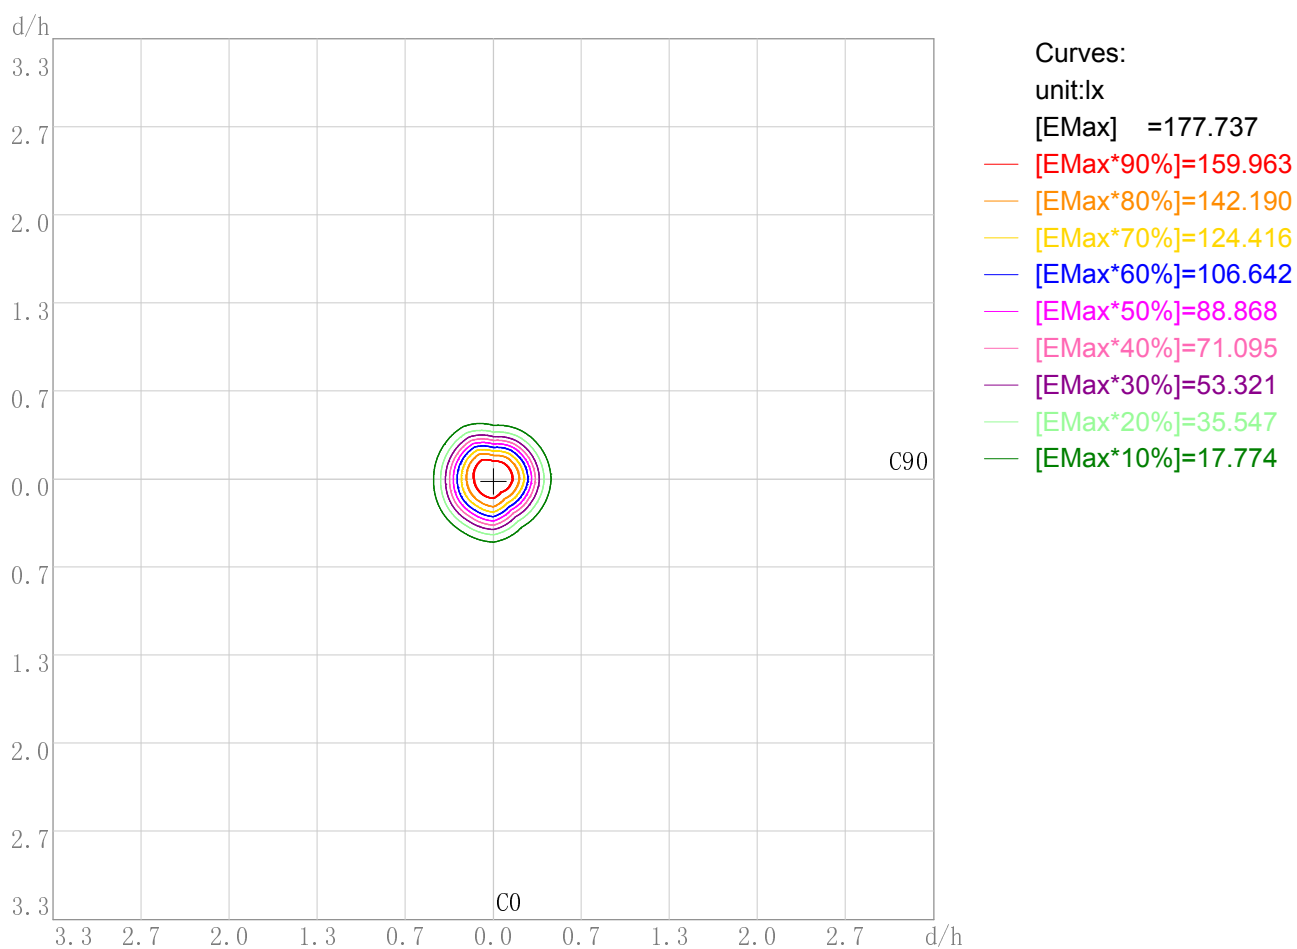

Working Plane Luminaire Mounting Height(m): 3.00

Working Plane Maximum Illuminance(lx): 177.74


Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0

Photometric Filename:UL-6W-COB-0600-CH-透镜36度-2700K.IES

3D Plane ISO Illuminance Diagram

Lum. Name: 55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/03/01


3D Plane Illuminance Modal

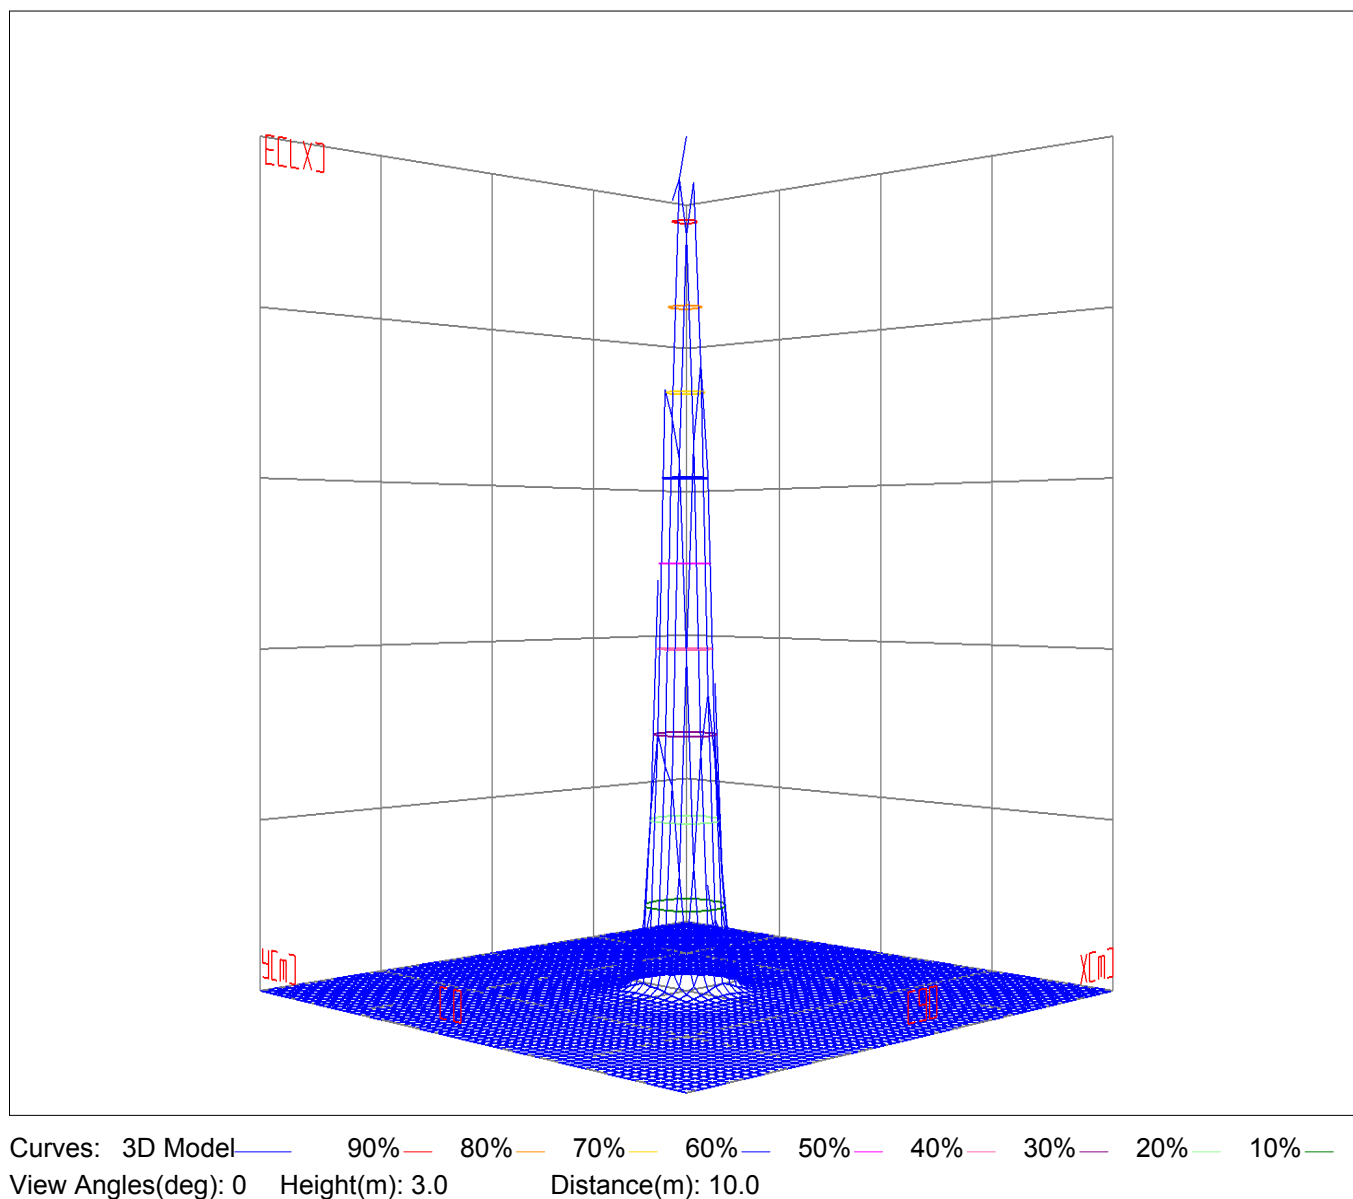

Space ISO Illuminance Diagram

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/03/01


Space ISO Illuminance Curve

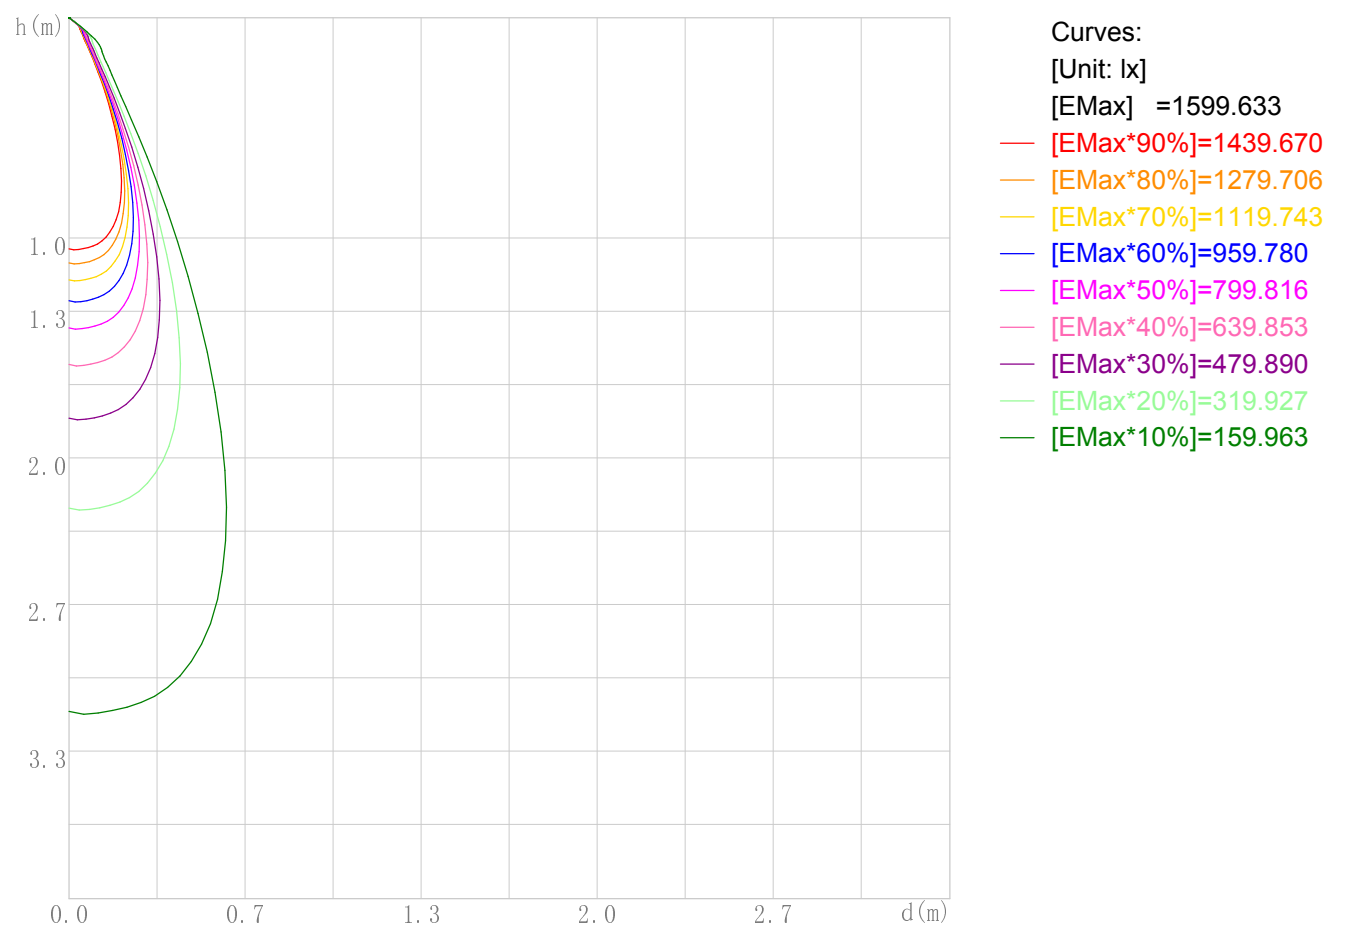

Space Plane Maximum Illuminance and @Angle:1599.63lx,1.0deg
Plane Maximum Lighting Intensity and @Angle:1600.364cd,0eg

Illuminance-Distance Diagram

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/03/01

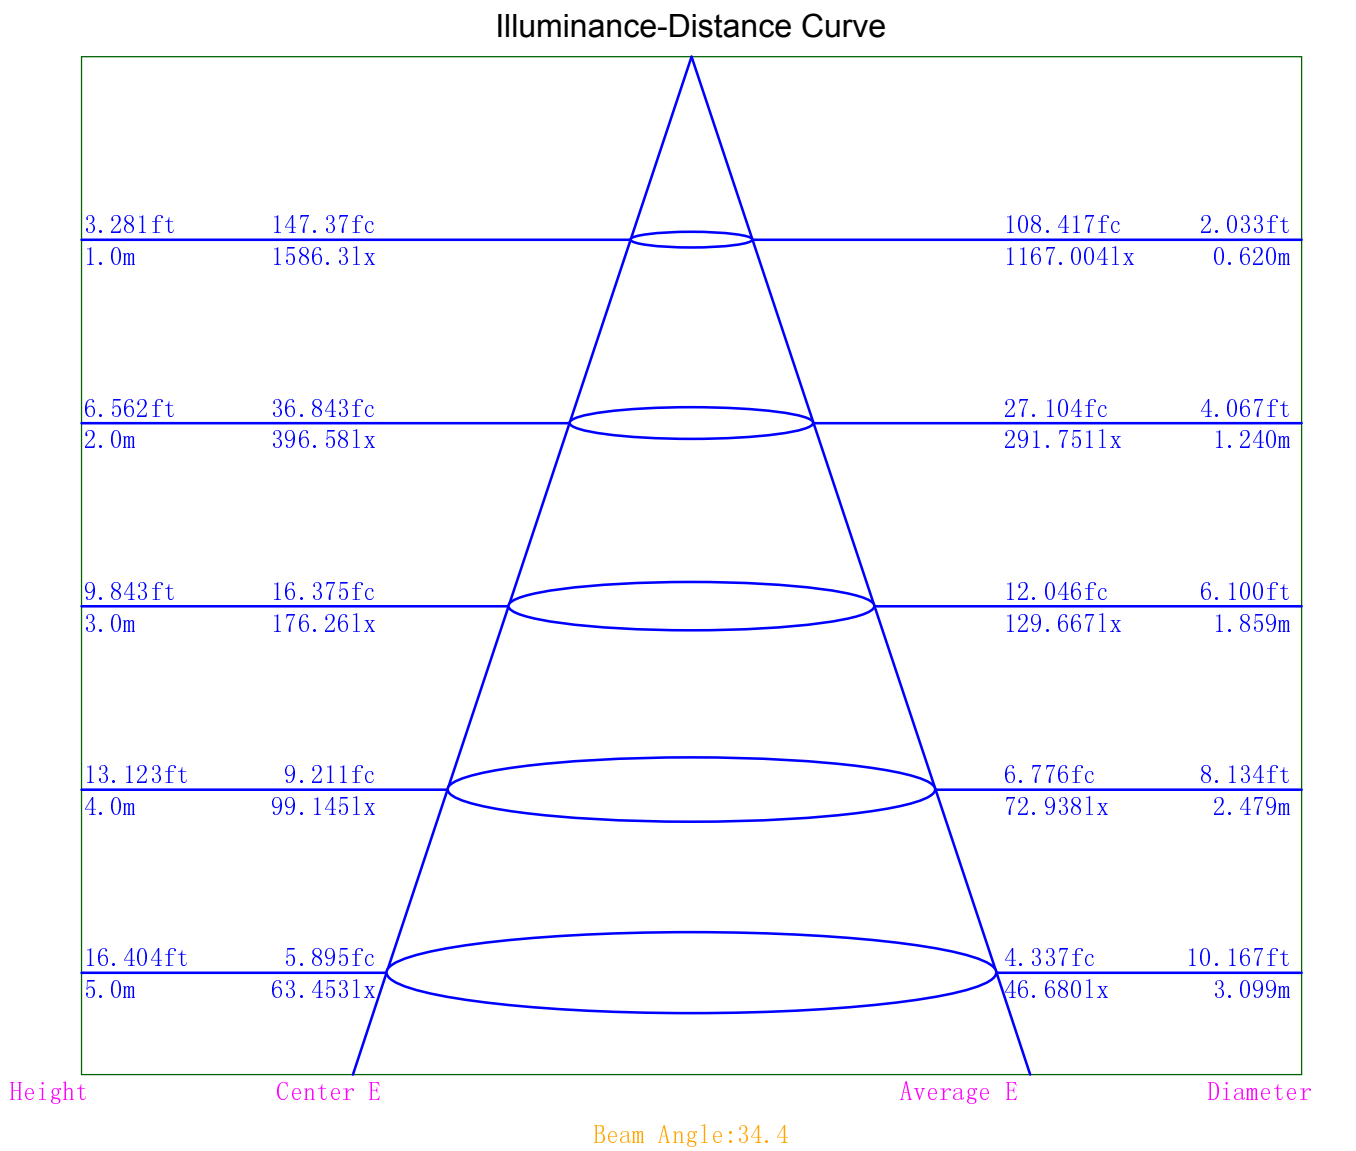

Indoor Luminance Limiting Curves

Lum. Name:55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/03/01


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama (deg)	45	50	55	60	65	70	75	80	85
C0	3115	0	0	0	0	0	0	0	0
C90	3902	264	0	0	0	0	0	0	0

Luminance Limiting Curve

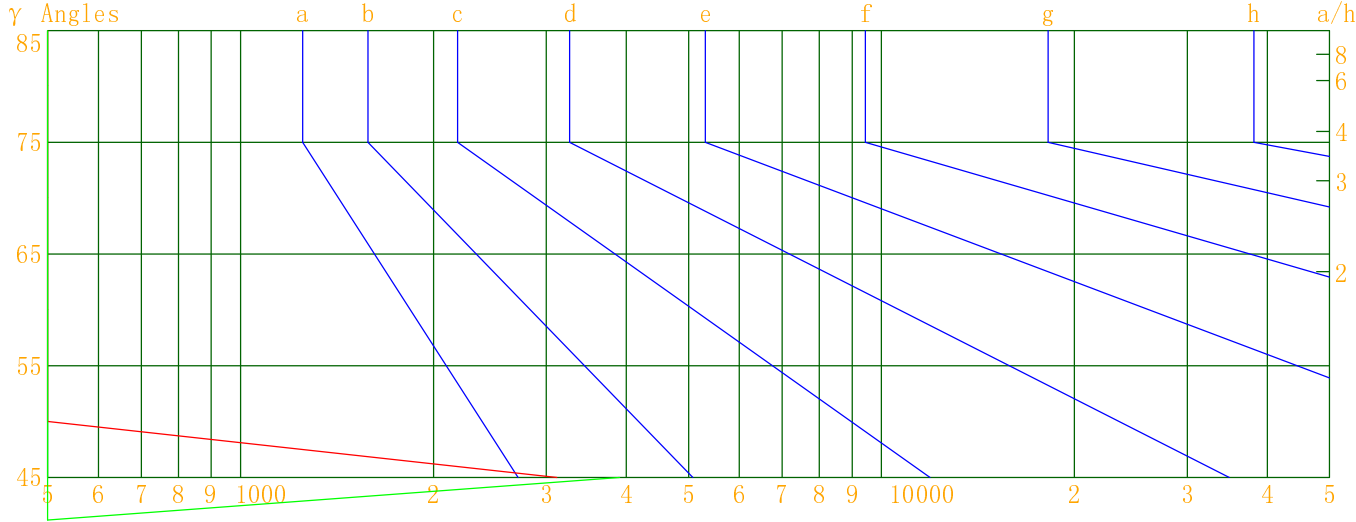

Luminous Size:

Length(m)=-0.050

Width(m)=-0.050

Height(m)=0.000

Area(m^2)=0.001963

Luminous Type:

Without Luminous Side


Luminous Curves:

C0-C180 Color: —

C90-C270 Color: —

Indoor Budgetary Estimate Table

Lum. Name: 55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/03/01

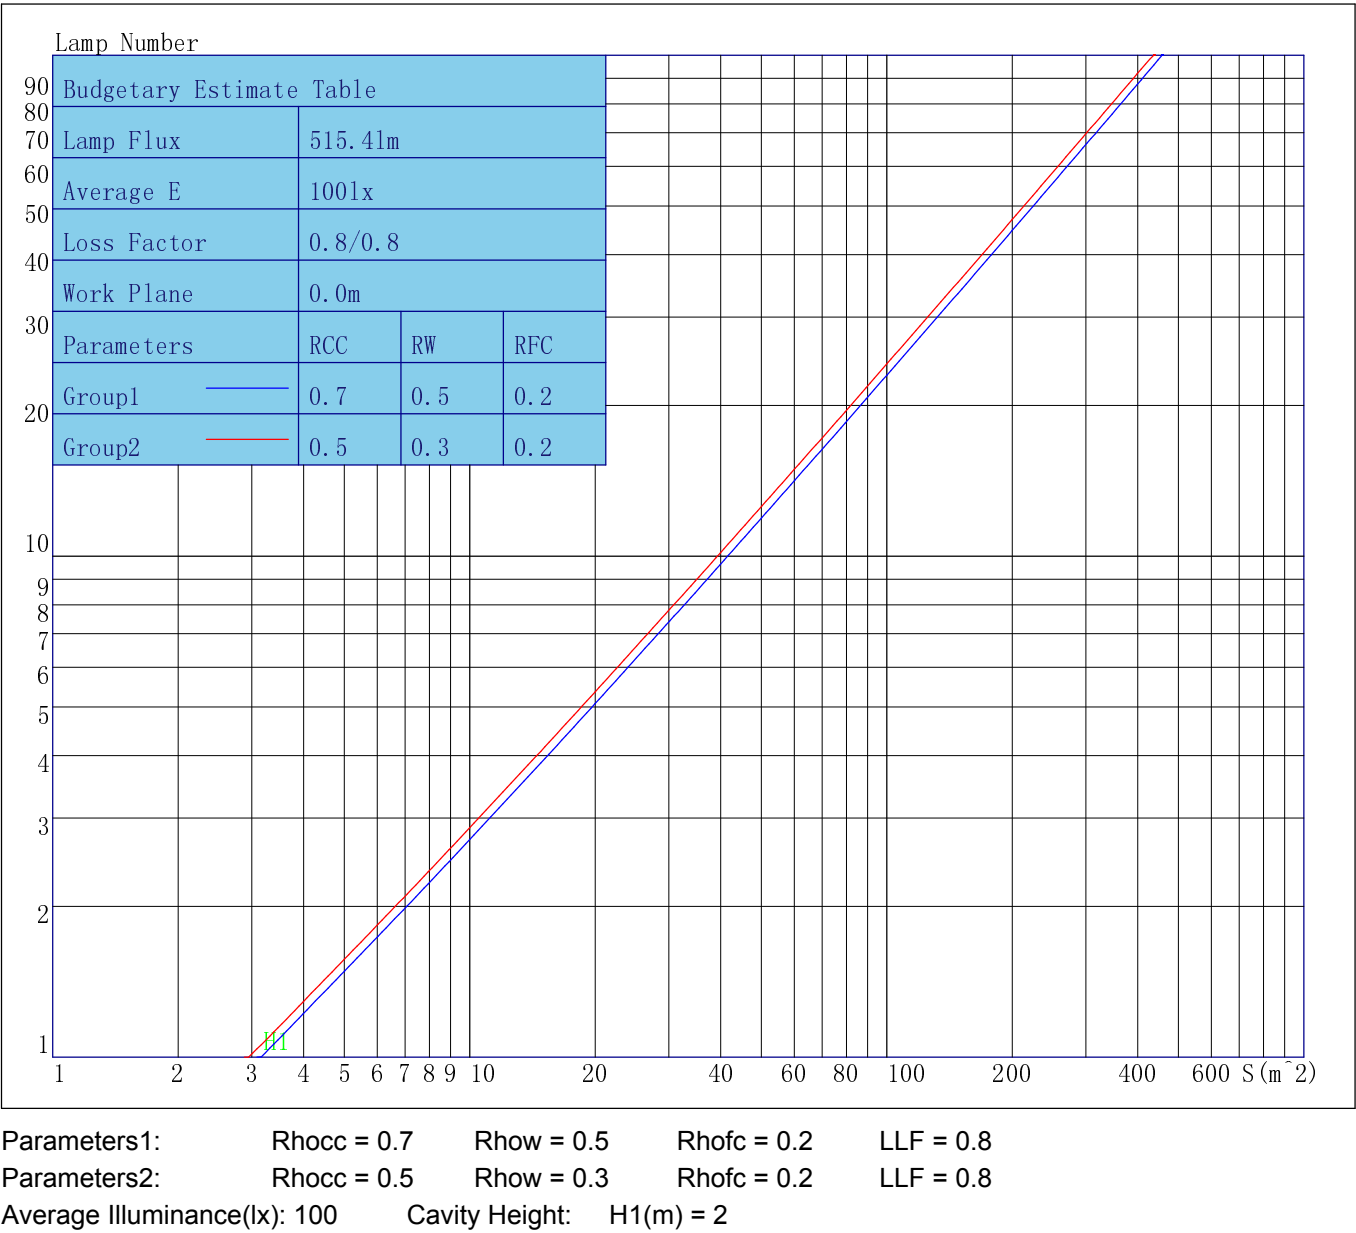

Indoor Coefficient of Utilization Table

Lum. Name:55252	Lum. Catelog:	Test ID:
Lamp Name:	Lamp Catelog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date: 2024/03/01

Coefficients of Utilization – Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96
2	111	107	104	102	109	106	103	101	103	100	99	100	98	97	97	96	95	93
3	107	103	99	96	106	101	98	95	99	96	94	97	94	93	95	93	91	90
4	104	99	95	92	102	98	94	91	96	92	90	94	91	89	92	90	88	87
5	101	95	91	88	99	94	90	87	92	89	86	91	88	86	89	87	85	84
6	98	91	87	84	97	91	87	84	89	86	83	88	85	83	87	84	82	81
7	95	88	84	81	94	88	84	81	87	83	80	86	82	80	85	82	80	79
8	92	85	81	78	91	85	81	78	84	80	78	83	80	77	82	79	77	76
9	90	83	78	76	89	82	78	76	81	78	75	81	77	75	80	77	75	74
10	87	80	76	73	86	80	76	73	79	76	73	78	75	73	78	75	73	72

Unified Glare Rating Table

Lum. Name:55252	Lum. Catalog:	Test ID:
Lamp Name:	Lamp Catalog:	Test Lab:
Manufacture:	Test Machine:GON-2000	Test Date:2024/03/01

Unified Glare Rating Table

Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	4.0	4.9	4.4	5.2	5.5	3.8	4.7	4.2	5.0	5.3
	Y=3H	3.8	4.6	4.2	4.9	5.3	3.6	4.4	4.0	4.7	5.1
	Y=4H	3.7	4.4	4.1	4.8	5.1	3.5	4.2	3.9	4.5	4.9
	Y=6H	3.6	4.2	4.0	4.6	5.0	3.4	4.0	3.8	4.4	4.8
	Y=8H	3.5	4.1	3.9	4.5	4.9	3.3	3.9	3.7	4.3	4.7
	Y=12H	3.4	4.0	3.9	4.4	4.8	3.2	3.8	3.7	4.2	4.6
X=4H	Y=2H	3.7	4.4	4.1	4.8	5.1	3.5	4.2	3.9	4.5	4.9
	Y=3H	3.5	4.0	3.9	4.4	4.9	3.2	3.8	3.7	4.2	4.6
	Y=4H	3.3	3.8	3.8	4.3	4.7	3.1	3.6	3.6	4.1	4.5
	Y=6H	3.2	3.6	3.7	4.1	4.6	3.0	3.4	3.5	3.9	4.4
	Y=8H	3.1	3.5	3.6	4.0	4.5	2.9	3.3	3.4	3.8	4.3
	Y=12H	3.1	3.4	3.5	3.9	4.4	2.8	3.2	3.3	3.7	4.2
X=8H	Y=4H	3.1	3.5	3.6	4.0	4.5	2.9	3.3	3.4	3.8	4.3
	Y=6H	3.0	3.3	3.5	3.8	4.3	2.8	3.1	3.3	3.6	4.1
	Y=8H	2.9	3.2	3.5	3.7	4.2	2.7	3.0	3.2	3.5	4.0
	Y=12H	2.9	3.1	3.4	3.6	4.2	2.6	2.9	3.2	3.4	4.0
X=12H	Y=4H	3.1	3.4	3.5	3.9	4.4	2.8	3.2	3.3	3.7	4.2
	Y=6H	2.9	3.2	3.5	3.7	4.2	2.7	3.0	3.2	3.5	4.0
	Y=8H	2.9	3.1	3.4	3.6	4.2	2.6	2.9	3.2	3.4	4.0
Variations with the objverver position at spacings											
S=1.0H		0.0/0.0					0.0/0.0				
S=1.5H		0.0/0.0					0.0/0.0				
S=2.0H		0.0/0.0					0.0/0.0				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		0.0					0.0				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES Indoor Report

Photometric Filename:UL-6W-COB-0600-CH-透镜36度-2700K.IES

Candela Tabulation

V/H	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0	C300.0	C330.0
γ 0.0	1586.31	1586.31	1586.31	1586.31	1586.31	1586.31	1586.31	1586.31	1586.31	1586.31	1586.31	1586.31
γ 1.0	1600.36	1598.70	1590.90	1580.49	1565.38	1553.66	1593.51	1589.53	1587.60	1580.89	1575.36	1571.85
γ 2.0	1597.43	1595.73	1585.09	1573.54	1554.71	1540.72	1584.60	1579.18	1580.03	1577.65	1578.22	1578.62
γ 3.0	1589.81	1586.80	1574.94	1564.35	1545.58	1528.92	1573.08	1565.47	1569.06	1569.90	1577.28	1582.43
γ 4.0	1579.58	1575.59	1564.00	1555.14	1537.85	1518.18	1558.52	1550.26	1554.75	1558.85	1572.65	1582.47
γ 5.0	1564.66	1562.93	1551.90	1546.04	1529.88	1502.63	1542.09	1534.17	1539.90	1547.96	1568.54	1580.19
γ 6.0	1543.41	1546.92	1538.02	1532.87	1514.27	1480.61	1524.76	1521.00	1525.57	1536.34	1562.81	1575.73
γ 7.0	1513.10	1522.50	1517.14	1513.96	1487.74	1451.85	1508.18	1507.70	1511.19	1522.01	1553.11	1568.57
γ 8.0	1471.20	1489.21	1487.86	1486.95	1451.82	1415.28	1489.60	1487.56	1490.96	1502.86	1534.85	1554.01
γ 9.0	1418.66	1447.17	1448.92	1450.87	1408.36	1368.69	1467.61	1456.83	1462.36	1478.17	1508.09	1529.67
γ 10.0	1355.44	1397.36	1401.08	1404.82	1355.62	1313.48	1440.37	1416.92	1425.97	1443.08	1471.70	1495.49
γ 11.0	1280.23	1338.00	1344.63	1351.17	1291.71	1248.06	1402.37	1369.31	1381.88	1396.10	1425.98	1450.97
γ 12.0	1192.45	1265.21	1275.81	1288.42	1215.33	1170.06	1353.30	1312.67	1329.53	1337.26	1369.74	1394.09
γ 13.0	1093.61	1179.80	1193.70	1212.57	1129.02	1082.83	1293.61	1246.77	1268.57	1268.45	1300.81	1326.24
γ 14.0	988.09	1083.01	1101.79	1123.82	1035.35	988.01	1224.67	1173.18	1197.97	1190.04	1220.04	1245.65
γ 15.0	876.82	978.12	998.68	1025.13	934.63	888.29	1147.62	1091.53	1116.74	1101.05	1126.92	1153.01
γ 16.0	760.84	866.49	891.40	918.39	829.83	785.78	1063.80	1001.27	1024.32	1002.94	1023.83	1049.94
γ 17.0	647.10	750.86	780.66	806.91	723.45	684.02	974.28	905.06	924.33	898.09	914.82	940.15
γ 18.0	538.09	637.61	667.76	695.44	618.01	585.22	878.48	804.47	819.67	788.63	802.18	827.60
γ 19.0	436.82	529.18	558.46	586.72	518.59	490.58	777.53	702.44	713.88	677.62	689.99	713.83
γ 20.0	347.54	429.73	457.05	484.73	426.91	402.15	675.35	601.90	608.55	570.46	581.56	604.09
γ 21.0	271.17	341.89	366.43	391.44	344.18	323.17	574.41	505.42	506.96	469.79	479.69	500.24
γ 22.0	207.18	265.09	287.26	309.31	271.46	254.15	479.26	415.48	413.72	379.40	388.07	406.45
γ 23.0	156.05	201.71	220.82	239.49	209.52	195.91	391.27	334.38	331.01	299.56	307.74	323.52
γ 24.0	116.22	150.63	165.86	181.23	158.38	147.46	312.03	262.81	258.42	231.75	238.91	251.70
γ 25.0	86.10	111.70	122.82	134.73	117.55	109.42	244.43	201.67	197.19	175.43	181.54	191.41
γ 26.0	64.33	82.69	91.12	99.22	86.45	80.20	187.63	151.51	147.74	130.54	135.39	143.88
γ 27.0	48.64	61.63	67.76	72.54	63.52	58.69	141.18	111.86	109.22	95.93	100.31	106.97
γ 28.0	37.66	46.70	50.80	52.94	46.60	43.57	105.05	81.43	80.09	70.38	74.24	79.25
γ 29.0	30.05	36.63	39.22	39.49	35.42	33.42	77.83	59.59	59.32	52.11	55.04	58.70
γ 30.0	24.67	29.82	31.46	30.80	27.84	26.92	57.79	44.49	44.72	39.54	41.65	44.07
γ 31.0	20.78	24.99	26.26	25.15	23.05	22.61	43.29	34.34	34.83	31.14	32.61	34.15
γ 32.0	17.82	21.39	22.55	21.15	19.75	19.46	33.49	27.94	28.09	25.45	26.56	27.65
γ 33.0	15.43	18.64	19.62	18.27	17.27	16.86	26.87	23.63	23.73	21.42	22.35	23.14
γ 34.0	13.40	16.21	17.13	15.90	15.09	14.67	22.29	20.39	20.45	18.55	19.17	19.82
γ 35.0	11.68	14.09	15.03	13.86	13.24	12.71	18.99	17.66	17.78	16.01	16.65	17.12
γ 36.0	10.39	12.41	13.26	12.23	11.61	10.96	16.29	15.38	15.41	13.99	14.50	14.97
γ 37.0	9.38	11.09	11.86	10.75	10.07	9.45	14.18	13.38	13.36	12.29	12.85	13.06
γ 38.0	8.68	10.10	10.72	9.65	9.04	8.22	12.22	11.59	11.63	10.89	11.32	11.41
γ 39.0	8.14	9.31	9.76	8.77	8.01	7.24	10.48	10.11	10.23	9.86	10.28	10.19
γ 40.0	7.69	8.69	9.03	8.11	7.33	6.39	9.16	9.04	9.27	9.02	9.40	9.22
γ 41.0	7.21	8.06	8.38	7.60	6.70	5.71	8.02	8.00	8.35	8.35	8.90	8.48
γ 42.0	6.75	7.48	7.78	7.13	6.24	5.03	7.07	7.36	7.51	7.70	8.39	7.83
γ 43.0	6.09	6.89	7.08	6.60	5.65	4.41	6.36	6.61	6.84	7.29	7.71	7.28
γ 44.0	5.36	6.28	6.48	6.12	4.94	3.63	5.68	5.94	6.24	6.55	7.21	6.64
γ 45.0	4.32	5.45	5.51	5.42	4.01	2.79	5.13	5.34	5.58	6.05	6.61	6.02
γ 46.0	3.23	4.38	4.35	4.45	3.02	1.82	4.55	4.46	4.62	5.04	5.81	5.39

Photometric Filename:UL-6W-COB-0600-CH-透镜36度-2700K.IES

V/H	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0	C300.0	C330.0
γ 47.0	2.03	3.21	3.28	3.45	2.13	0.95	3.75	3.56	3.73	4.00	4.74	4.43
γ 48.0	0.84	2.07	2.19	2.39	1.09	0.14	2.86	2.59	2.73	3.04	3.65	3.44
γ 49.0	0.00	1.04	1.07	1.43	0.13	0.00	1.97	1.66	1.66	1.91	2.53	2.34
γ 50.0	0.00	0.00	0.00	0.33	0.00	0.00	1.14	0.72	0.74	0.97	1.38	1.18
γ 51.0	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.00	0.00	0.00	0.31	0.10
γ 52.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 53.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 54.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 55.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 56.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 57.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 58.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 59.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 60.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 61.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 62.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 63.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 64.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 65.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 66.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 67.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 68.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 69.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 70.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 71.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 72.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 73.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 74.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 75.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 76.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 77.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 78.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
γ 79.0	0.00	0.00										

Photometric Filename:UL-6W-COB-0600-CH-透镜36度-2700K.IES

[illegible]

Photometric Filename:UL-6W-COB-0600-CH-透镜36度-2700K.IES

[illegible]