




PLAYLITE®


PSZoom 8



Dimension

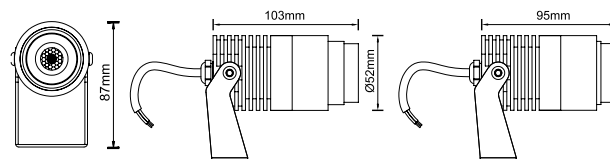

Light Distribution Curve (3000K, 40°)

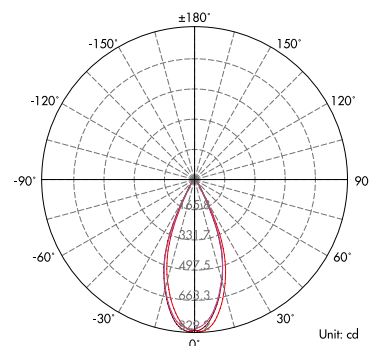


Lux distance Curve (3000K, 40°)

3.281ft	75.919fc	50.517fc	2.516ft
1.0m	817.20lx	543.770lx	0.767m
6.562ft	18.980fc	12.629fc	5.031ft
2.0m	204.30lx	135.943lx	1.534m
9.843ft	8.435fc	5.613fc	7.547ft
3.0m	90.800lx	60.419lx	2.300m
13.123ft	4.745fc	3.157fc	10.063ft
4.0m	51.075lx	33.986lx	3.067m
16.404ft	3.037fc	2.021fc	12.578ft
5.0m	32.688lx	21.751lx	3.834m

Height Center E Beam Angle: 42.0 Average E Diameter

Illumination Picture (40°)

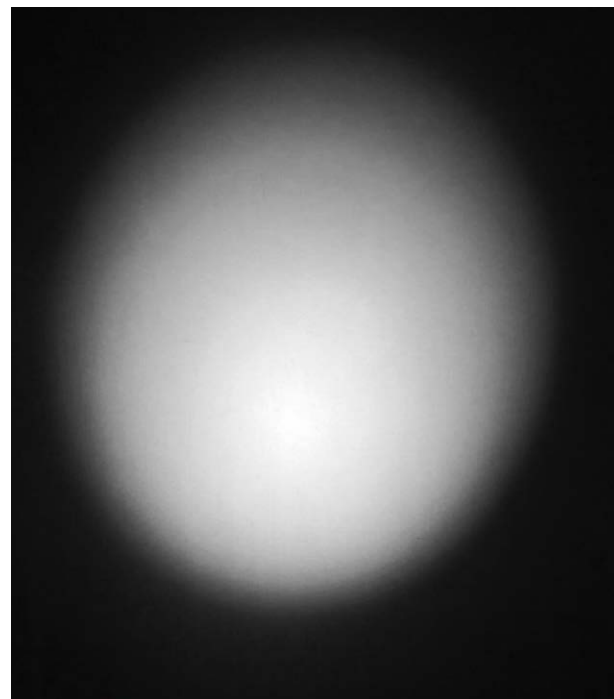

CE RoHS COMPLIANT IP67 IK04

Passivated

Zoomable

3 Years Warranty

Parameter

General Data	
Item No.	UL-8W-COB-0800-FH (PULL)
Power	8 watts $\pm 10\%$
LED type	1 PC 8W TOYONIA COB LED
Luminous flux	10°: 200lm $\pm 10\%$, 40°: 350 lm $\pm 10\%$
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	Zoomable 10° to 40° adjustable
Dimension	52 x 103 (mm) Diameter x Height
Cut out	/
Net weight	0.46 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~245V as standard (DC24V as options)
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	Built-in high voltage constant current driver with transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	anodizing + powder coated painting in dark grey as standard, black or white as options
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass, T=2mm
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With black PVC spike as standard
Round base	With SS304 round base as optional
Packaging	
Inner box size	180*105*65 mm
Carton size	55*23.5*14 cm (20 PCS / carton)


GARDEN LIGHTS SERIES




PSZoom 12




Dimension

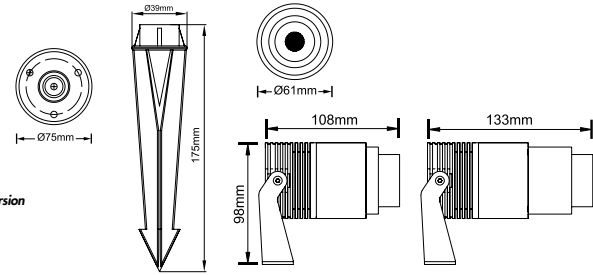

Light Distribution Curve (3000K, 60°)

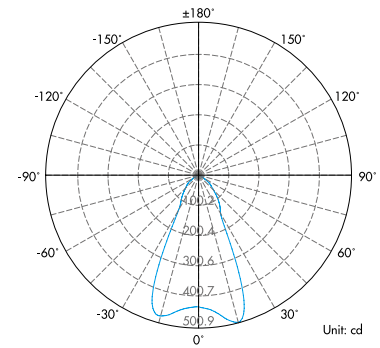

Lux distance Curve (3000K, 60°)

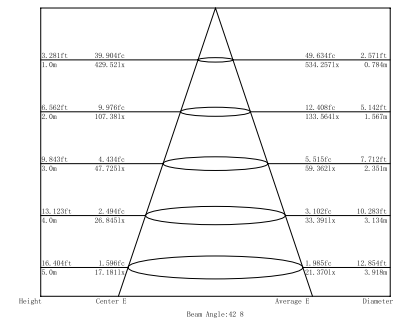

Illumination Picture (60°)




GARDEN LIGHTS SERIES




Parameter	
General Data	
Item No.	UL-12W-COB-1200-BH
Power	12 Watts
LED type	1 PC 12W CREE COB LED
Luminous flux	10°: 200~230 lm, 60°: 450~550 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	Zoom 10° to 60° adjustable
Dimension	61 x 133 (mm) Diameter x Height
Cut out	/
Net weight	0.62 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	Built-in high voltage constant current driver with transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	anodizing + powder coated painting in dark grey as standard, black or white as options
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass. T=3mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With PVC spike as spike spot lights (Standard)
Round base	With SS304 round base for wall mounting (optional)
Packaging	
Inner box size	140*115*80mm
Carton size	39.5*28*26cm (18PCS / carton)




Dimension

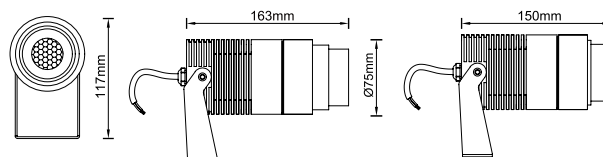


Light Distribution Curve (3000K, 10°)

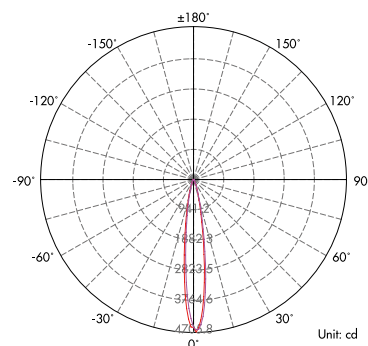

Lux distance Curve (3000K, 10°)

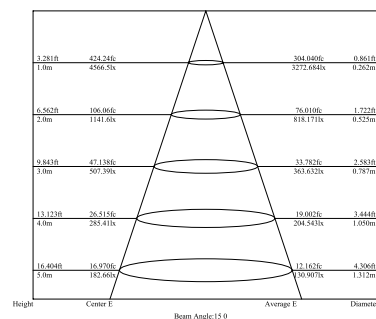

Illumination Picture (10°/40°)

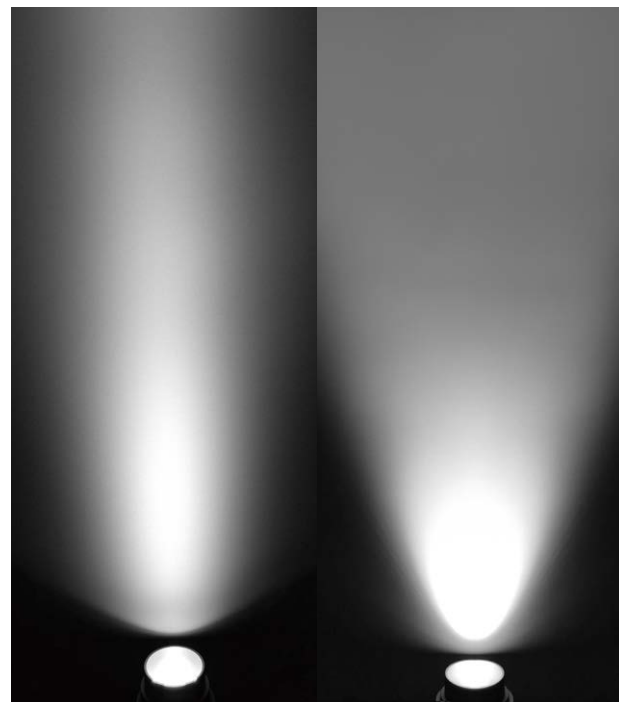

CE RoHS COMPLIANT IP67 IK04
3 Years Warranty

Parameter

General Data

Item No.	UL-18W-COB-1800-FH (PULL)
Power	18 Watts $\pm$ 10%
LED type	1 PC 18W TOYONIA COB LED
Luminous flux	10°: 450lm $\pm$ 10%; 40°: 700lm $\pm$ 10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	Zoomable 10° to 40°
Dimension	163*117*75 (mm) (Length x height x Diameter)
Cut out	/ mm
Net weight	1.2 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	AC100-245V 50/60Hz or DC24V
Insulation class	Class I or III
Cable	1PC rubber cable 1M H05RN-F 3 or 2 x 1mm square
Driver	AC100-245V 50/60Hz: built-in constant current driver DC24V: constant low voltage input, constant current output for LEDs

Construction Data

IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	anodizing + powder coated painting in dark grey as standard, black or white as options
Trim	Aluminum
Glass	Tempered glass T=2mm
Loading capacity	220 kgs
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal

Accessories

Spike	with 205mm height Aluminium spike for ground installation with SS304 Pedal that can be used with spike for pushing the spike light into the ground by foot
Pedal	
Round base	With SS304 base in dark grey as optional for concrete ground installation

Packaging


Inner box size	230*130*85 mm
Carton size	48*28*19.5 cm (12 PCS / carton)

PLAYLITE®


PSZoom 25




Dimension

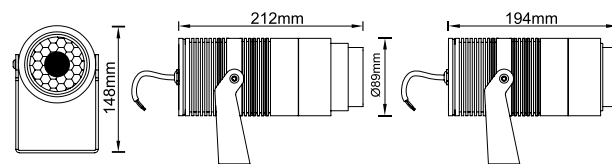

Light Distribution Curve (3000K, 40°)

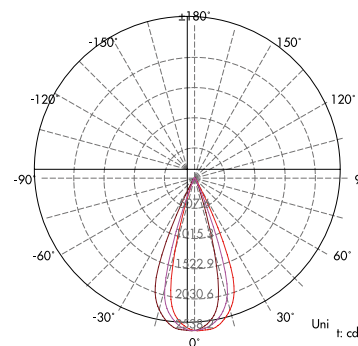

Lux distance Curve (3000K, 40°)

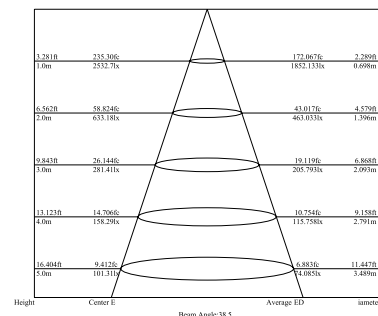

CE RoHS COMPLIANT IP67 IK04

3 Years Warranty

Parameter

General Data

Item No.	UL-25W-COB-2500-FH (PULL)
Power	25 Watts $\pm 10\%$
LED type	1 PC 25W CREE COB CMA1516 LED or TOYONIA COB LED M20
Luminous flux	10°: 730 lm $\pm 10\%$; 40°: 1060 lm $\pm 10\%$
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	Zoomable 10° to 40° adjustable
Dimension	Ø89 x 212 (mm) Diameter x length
Cut out	/
Net weight	1.72 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	AC100-245V 50/60Hz
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	High voltage constant current output, with the transformer

Construction Data

IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	anodizing + powder coated painting in dark grey as standard, black or white as options
Trim	Passivated (Anodizing) Aluminum
Glass	Tempered Glass. T=2mm.
Loading capacity	220 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal

Accessories

Spike	With Aluminium spike optional
Round base	With SS304 round base optional

Packaging

Inner box size	250*155*110 mm
Carton size	49*27*24 cm (6 PCS / carton)

GARDEN LIGHTS SERIES

Illumination Picture (40°)

