



CE RoHS COMPLIANT IP68 IK04

SSS 316

3 Years Warranty

Use only in permanent immersion in water as to avoid damaging to LED!

Parameter

General Data

Item No.	SL-1004-0300-A
Power	3 Watts
LED type	1PC CREE XPE LED
Luminous flux	110~130 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	10°, 15°, 30°, 45°, 60°
Dimension	Ø32x52 (mm) Diameter x length
Cut out	/
Net weight	0.3 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	DC 12V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	Low voltage constant current driver without transformer

Construction Data

IP rating	IP68 Waterproof
IK rating	IK04
Housing	Stainless steel 316
Protection finishing	Stainless steel 316
Trim	Stainless steel 316
Glass	Tempered Glass, T=2mm.
Loading capacity	220 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal


Accessories

Spike	PVC spike as optional
Round base	With SS304 round base as optional


Packaging

Inner box size	120*100*50 mm
Carton size	26.5*22.5*27.5 cm (20 PCS / carton)


Dimension

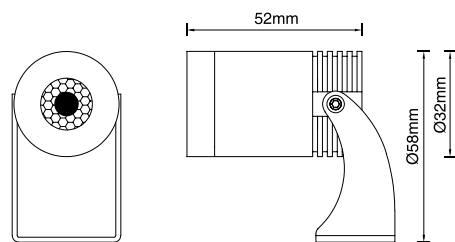

Light Distribution Curve (3000K, 25°)

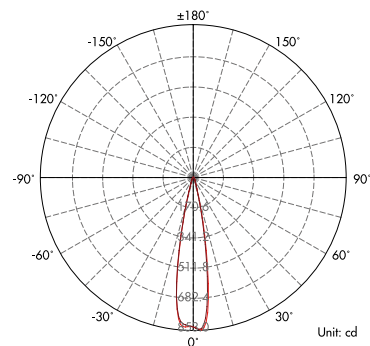

Lux distance Curve (3000K, 25°)

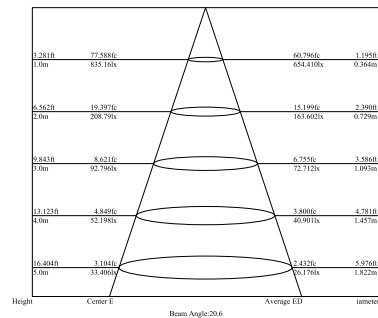

Illumination Picture (25°)





PLAYLITE®



CE RoHS COMPLIANT IP68 IK04

SSS 316

3 Years Warranty

RGB / RGBW

Use only in permanent immersion in water as to avoid damaging to LED!

Parameter

General Data

Item No.	SL-1004-0300RGBW-A
Power	3 Watts
LED type	1 PC 3W RGBW LED
Luminous flux	/
CCT	RGBW3000K or RGBW4000K, or RGBW6000K
CRI	/
Beam angle	30°
Dimension	Ø32x52 (mm) Diameter x length
Cut out	/
Net weight	0.35 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 5x0.5mm square
Driver	Low voltage input, constant current output, excluding the transformer

Construction Data

IP rating	IP68 Waterproof
IK rating	IK04
Housing	Stainless steel 316
Protection finishing	Stainless steel 316
Trim	Stainless steel 316
Glass	Tempered frosted glass, T=2mm
Loading capacity	220 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal


Accessories

Spike	PVC spike as optional
Round base	With SS304 round base as optional


Packaging

Inner box size	120*100*50 mm
Carton size	26.5*22.5*27.5 cm (20 PCS / carton)


Dimension

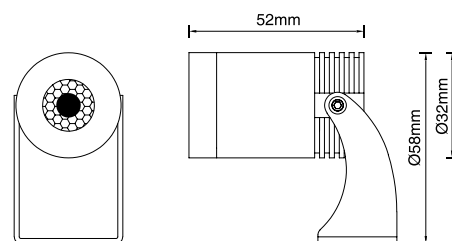


Light Distribution Curve (3000K, 30°)

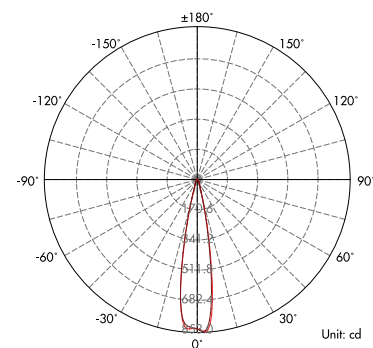

Lux distance Curve (3000K, 30°)

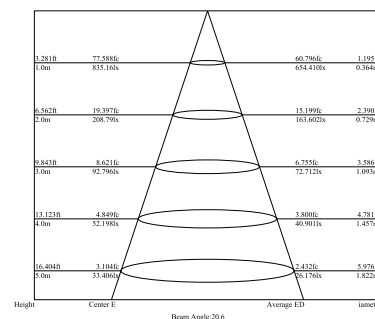

Illumination Picture (30°)

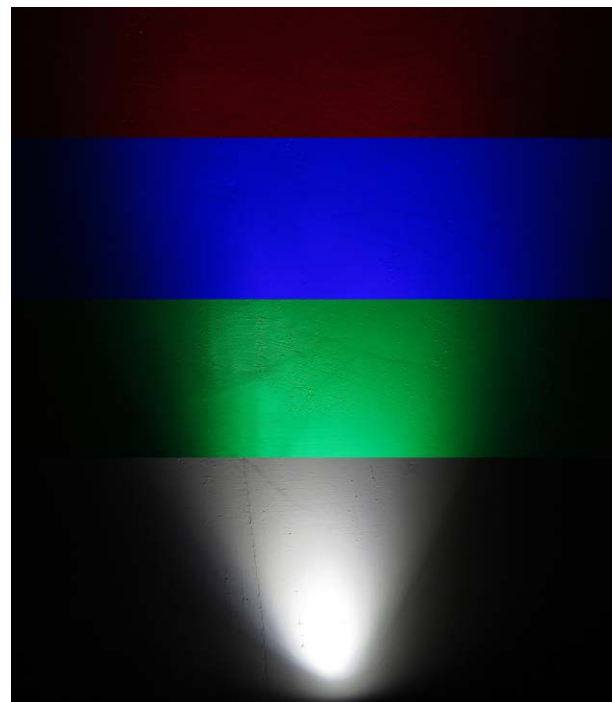

UNDERWATER LIGHTS SERIES





IP68 IK04

SSS 316

3 Years Warranty

Use only in permanent immersion in water as to avoid damaging to LED!

Parameter

General Data

Item No.	SL-1010-0800-A
Power	8 Watts
LED type	1 PC 8V CREE COB LED
Luminous flux	500~550 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	15°, 24°, 36°, 60°
Dimension	Ø44 x 90 (mm) Diameter x length
Cut out	/
Net weight	0.7 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	Low voltage input, constant current output, excluding the transformer

Construction Data

IP rating	IP68 Waterproof
IK rating	IK04
Housing	Stainless steel 316
Protection finishing	Stainless steel 316
Trim	Stainless steel 316
Glass	Tempered Glass, T=2mm.
Loading capacity	220 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal


Accessories

Spike	PVC spike as optional
Round base	With SS304 round base as optional


Packaging

Inner box size	116*95*48 mm
Carton size	49*25*16 cm (30 PCS / carton)


Dimension

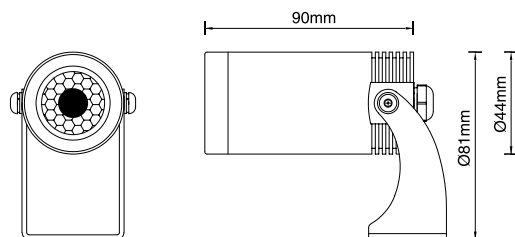


Light Distribution Curve (3000K, 36°)

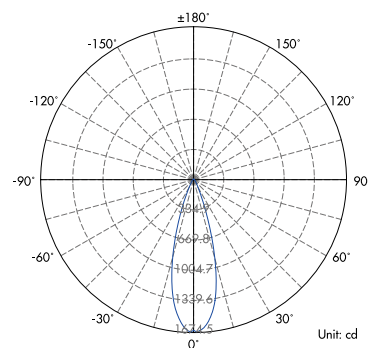

Lux distance Curve (3000K, 36°)

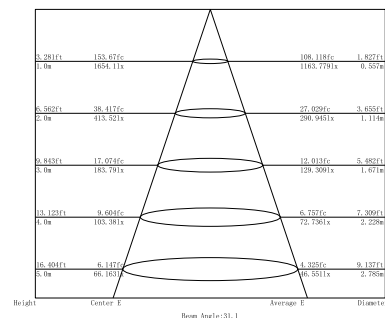

Illumination Picture (36°)

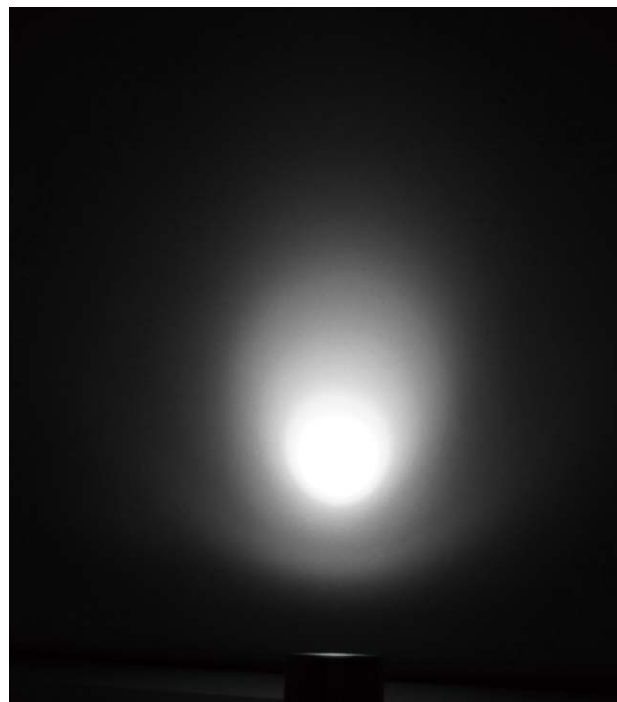



PLAYLITE®



CE RoHS COMPLIANT IP68 IK04

SSS 316

3 Years Warranty

RGB / RGBW

Use only in permanent immersion in water as to avoid damaging to LED!

Parameter

General Data

Item No.	SL-1010-0800-0RGBW-A
Power	8 Watts
LED type	1 PC 8W RGBW LED
Luminous flux	/
CCT	RGBW3000K or RGBW4000K or RGBW6000K
CRI	/
Beam angle	15°, 24°, 36°, 60°
Dimension	Ø44 x 90 (mm) Diameter x length
Cut out	/
Net weight	0.75 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 5x0.5mm square
Driver	Low voltage input, constant current output, excluding the transformer

Construction Data

IP rating	IP68 Waterproof
IK rating	IK04
Housing	Stainless steel 316
Protection finishing	Stainless steel 316
Trim	Stainless steel 316
Glass	Tempered frosted glass, T=2mm
Loading capacity	220 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal


Accessories

Spike	PVC spike as optional
Round base	With SS304 round base as optional


Packaging

Inner box size	116*95*48 mm
Carton size	49*25*16 cm (30 PCS / carton)


Dimension

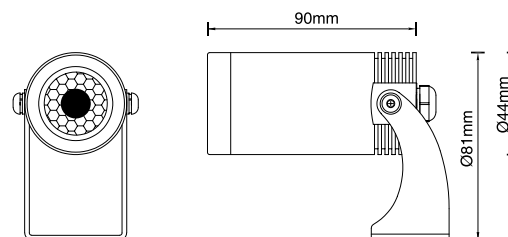


Light Distribution Curve (3000K, 36°)

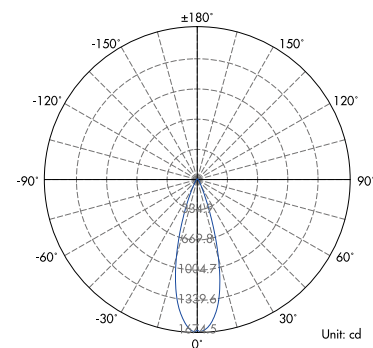

Lux distance Curve (3000K, 36°)

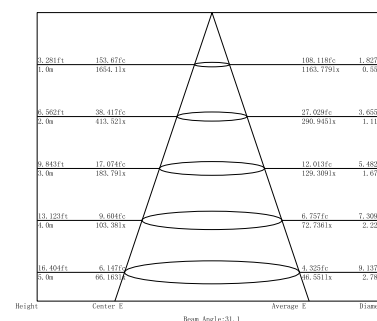

Illumination Picture (36°)

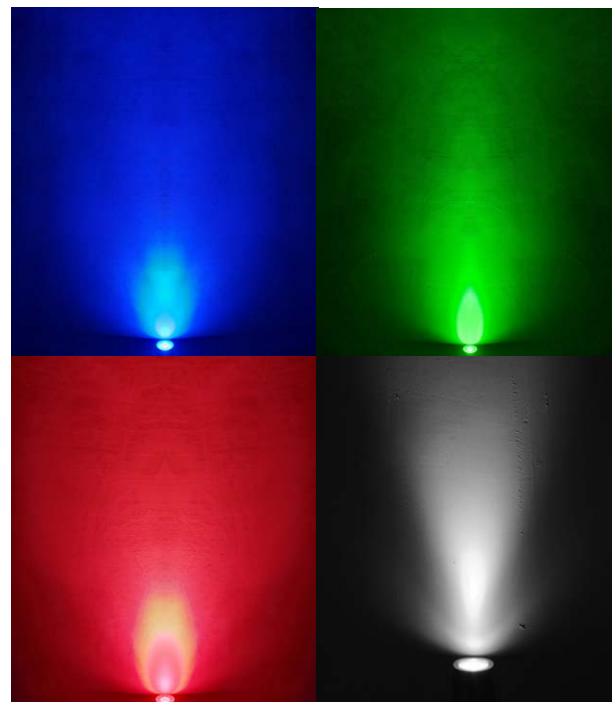

UNDERWATER LIGHTS SERIES





CE RoHS COMPLIANT IP68 IK04

SSS 316

3 Years Warranty

Use only in permanent immersion in water as to avoid damaging to LED!

Parameter

General Data

Item No.	SL-15W-COB-1500-A
Power	15 Watts
LED type	3PCS CREE XPG3 LED
Luminous flux	1000~1050 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	10°, 23°, 36°
Dimension	Ø59 x 103 (mm) Diameter x length
Cut out	/
Net weight	1.1 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	DC 12V-24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	Low voltage input, constant current output, excluding the transformer

Construction Data

IP rating	IP68 Waterproof
IK rating	IK04
Housing	Stainless steel 316
Protection finishing	Stainless steel 316
Trim	Stainless steel 316
Glass	Tempered Glass, T=2mm.
Loading capacity	220 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal


Accessories

Spike	PVC spike as optional
Round base	With SS304 round base as optional


Packaging

Inner box size	160*120*80 mm
Carton size	34.5*26.5*26.5 cm (12 PCS / carton)


Dimension

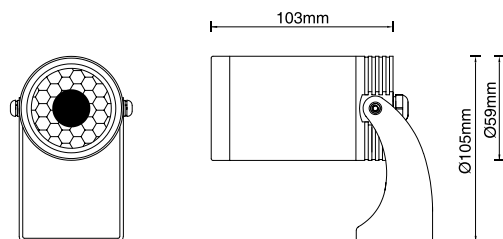

Light Distribution Curve (3000K, 10°)

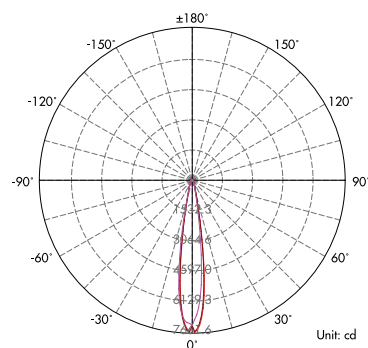

Lux distance Curve (3000K, 10°)

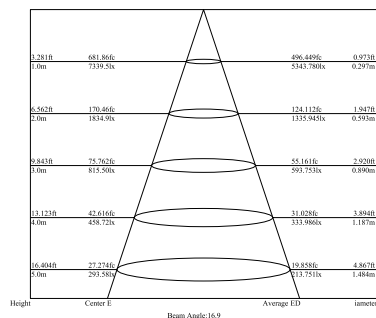

Illumination Picture (10°)





PLAYLITE®



CE RoHS COMPLIANT IP68 IK04

SSS 316

3 Years Warranty

RGB / RGBW

Use only in permanent immersion in water as to avoid damaging to LED!

Parameter

General Data

Item No.	SL-15W-COB-1500-RGBW-A
Power	15 Watts
LED type	3PCS RGBW 3030 LED
Luminous flux	/
CCT	RGBW3000K or RGBW4000K or RGBW6000K
CRI	/
Beam angle	10°, 23°, 36°
Dimension	Ø59 x 103 (mm) Diameter x length
Cut out	/
Net weight	1.15 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	DC12V as standard (DC24V optional)
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 5x0.5mm square
Driver	Low voltage input, constant current output, excluding the transformer

Construction Data

IP rating	IP68 Waterproof
IK rating	IK04
Housing	Stainless steel 316
Protection finishing	Stainless steel 316
Trim	Stainless steel 316
Glass	Tempered frosted glass, T=2mm
Loading capacity	220 kgs
Cable Gland	PG gland
Gasket	O-ring PMQ silicone seal


Accessories

Spike	PVC spike as optional
Round base	With SS304 round base as optional


Packaging

Inner box size	160*120*80 mm
Carton size	34.5*26.5*26.5 cm (12 PCS / carton)


Dimension

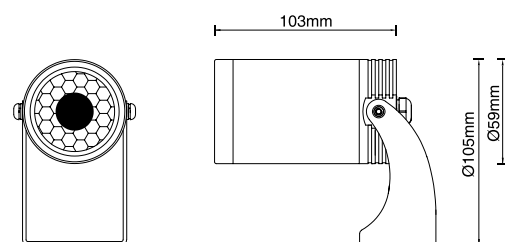


Light Distribution Curve (3000K, 10°)

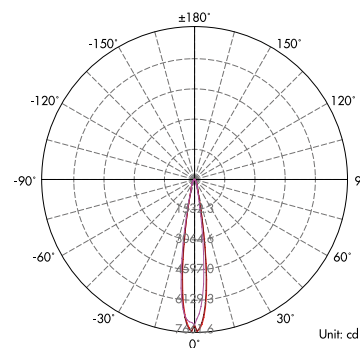

Lux distance Curve (3000K, 10°)

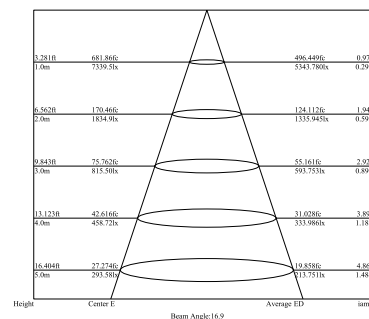

Illumination Picture (10°)

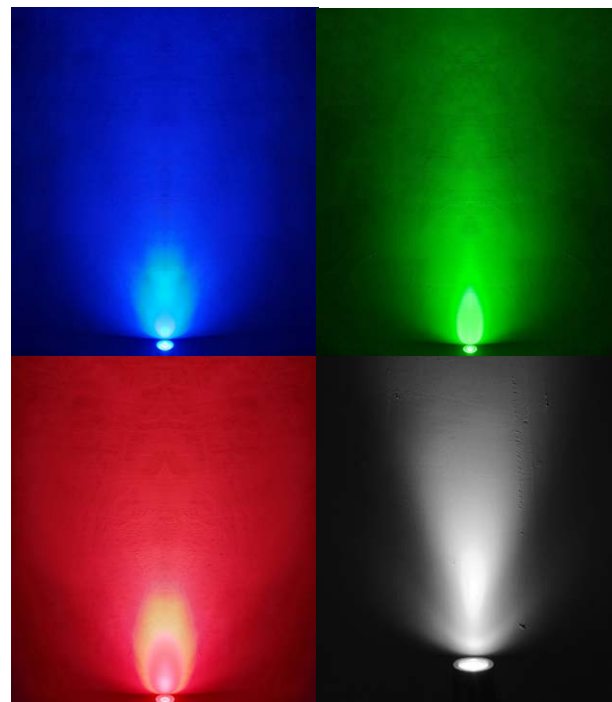

UNDERWATER LIGHTS SERIES



