

CE RoHS COMPLIANT IP67 IK09

SSS 316

Passivated


3 Years Warranty

Adjustable


Parameter

General Data	
Item No.	UL-6W-COB-0600-G
Power	6 Watts
LED type	1 PC 6W CREE COB LED
Luminous flux	470-500 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	25°, 36° (beam direction adjustable by hand at 20° at max)
Dimension	Ø116x73 (mm) Diameter x length
Cut out	100 mm
Net weight	1.38 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	Low voltage constant current output, excluding the transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK09
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Stainless steel 316
Glass	Step tempered Glass. T=8mm.
Loading capacity	2000 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Solid Passivated (Anodizing) Aluminum CNC machined
Packaging	
Inner box size	125*125*120 mm
Carton size	40*27*26.5 cm (12PCS / carton)


Dimension

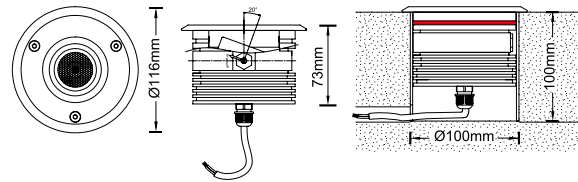


Light Distribution Curve (3000K, 36°)

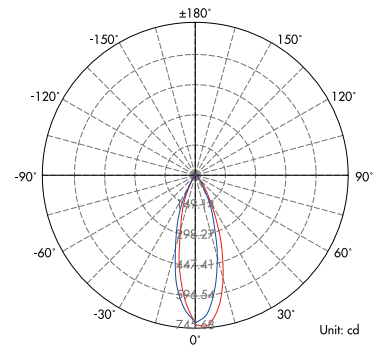

Lux distance Curve (3000K, 36°)

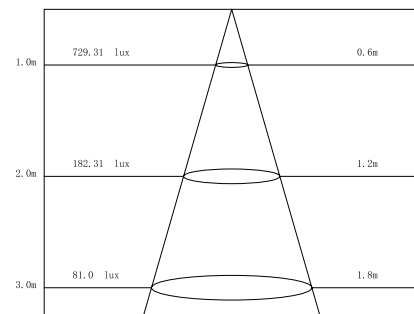

Illumination Picture (36°)

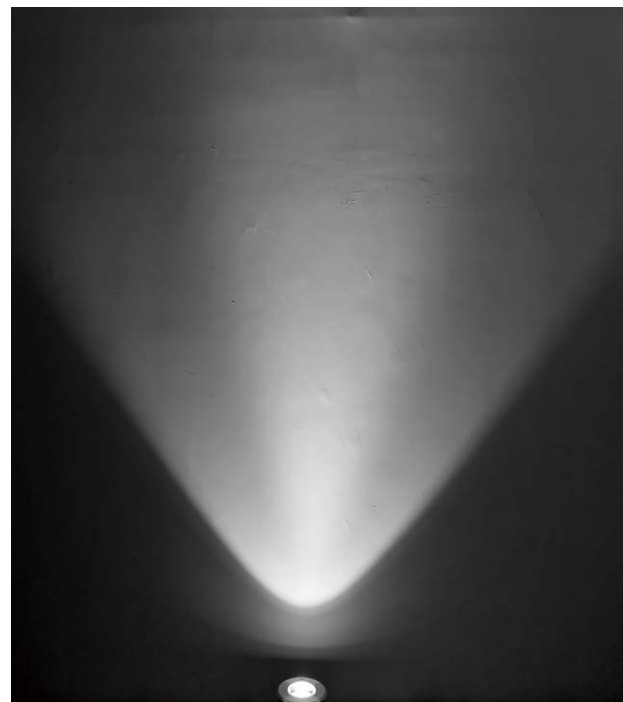





PLAYLITE®




Dimension

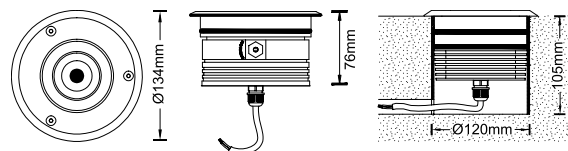


Light Distribution Curve (3000K, 1x38°)

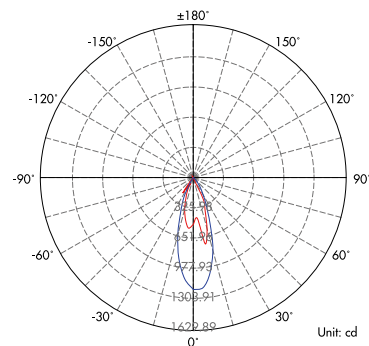

Lux distance Curve (3000K, 1x38°)

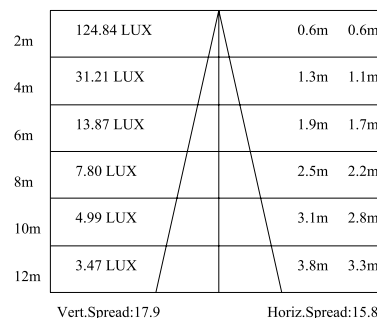

Illumination Picture (1x38°)

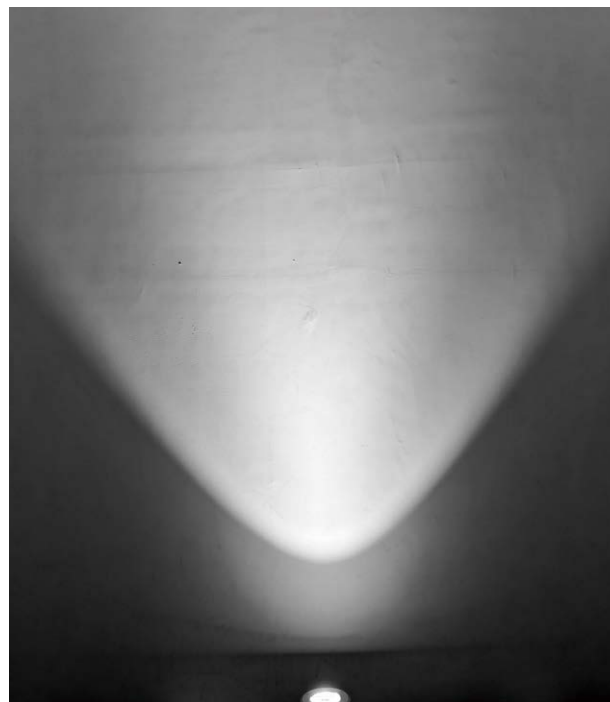

CE RoHS COMPLIANT IP67 IK09

SSS 316

Passivated

3 Years Warranty

Adjustable

Parameter

General Data	
Item No.	UL-12W-COB-1200-C
Power	12 Watts
LED type	1 PC 12W CREE COB LED
Luminous flux	950~1000 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	24°, 38°, 60° (beam direction adjustable by hand at 20° at max)
Dimension	Ø134x 76 (mm) Diameter x length
Cut out	120 mm
Net weight	1.9 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	Low voltage constant current output, excluding the transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK09
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Stainless steel 316
Glass	Step tempered Glass. T=8mm.
Loading capacity	2000 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Passivated (Anodizing) Aluminum CNC machined
Packaging	
Inner box size	140*140*117 mm
Carton size	43.5*16.5*25 cm (6PCS / carton)

INGROUND LIGHTS SERIES

