





PLAYLITE®


Xlinear Maxi

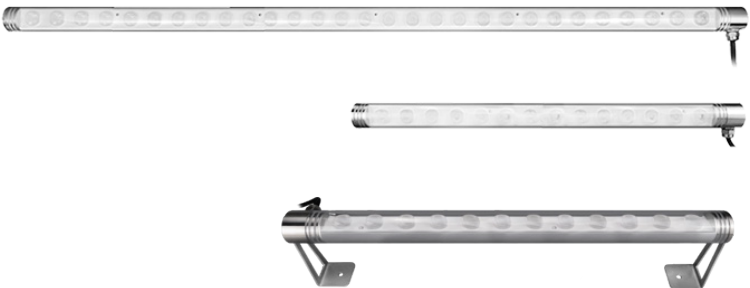


Dimension



Light Distribution Curve (3000K, 28°)

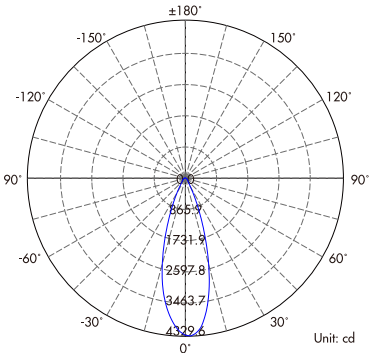

Lux distance Curve (3000K, 28°)

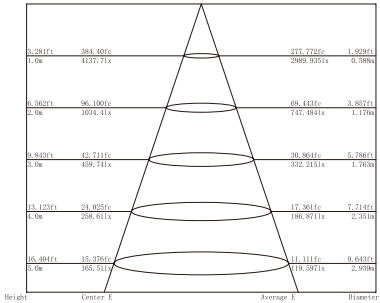

Illumination Picture (28°)



CE

IP68 IK09

3 Years Warranty

IP68 waterproof for both of underwater or without water
It can be used as underwater linear light or wall washer or tri-proof linear light
Two brackets as options


Parameter	
General Data	
Item No.	0.5M: SL-T12-2400-A / 1M: SL-T12-4800-A
Power	0.5M: 24W / 1M: 48 W+10%
LED type	0.5M: 12 PCS / 1M: 24 PCS CREE XPE LED
Luminous flux	0.5M: 1800 lm / 1M: 3600lm +10%
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	Symmetric: 6°, 11°, 17°, 23°, 28°, 43°, 58° Asymmetric: 15°x15°, 15°x25°, 15°x30°, 15°x45°, 15°x60°
Dimension	Ø45x500 or 1000 (mm) Diameter x length
Cut out	/ mm
Net weight	0.5M: 1.5 kgs , 1M: 3.1kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 2M H05RN-F 2x1mm square
Driver	Low voltage constant voltage input, constant current output for LED
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK09
Housing	Tin brass +PC tube with Aluminium housing inside
Protection finishing	Anodized for Aluminium +Chrome Plated for brass
Trim	PC
Glass	/
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Bracket	SS316 bracket
Packaging	
Inner box size	50*80*700 mm for 0.5M
Carton size	720*42.5*12.5 cm (10 PCS/carton) for 0.5M

XLINEAR LIGHTS SERIES




PLAYLITE®


Xlinear Maxi RGBW

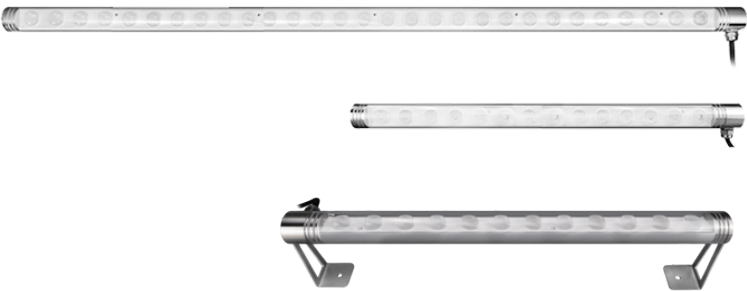


Dimension




Light Distribution Curve (1m RGBW3000K,15x60°)

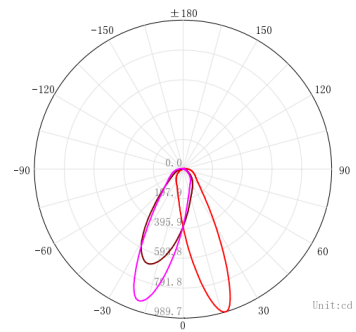

Lux distance Curve (1m RGBW3000K,15x60°)

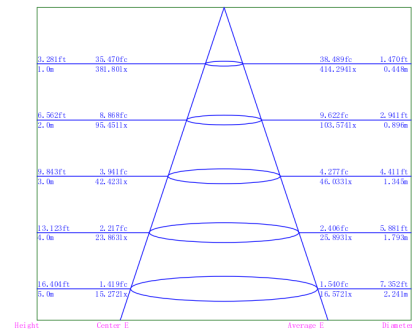

Illumination Picture

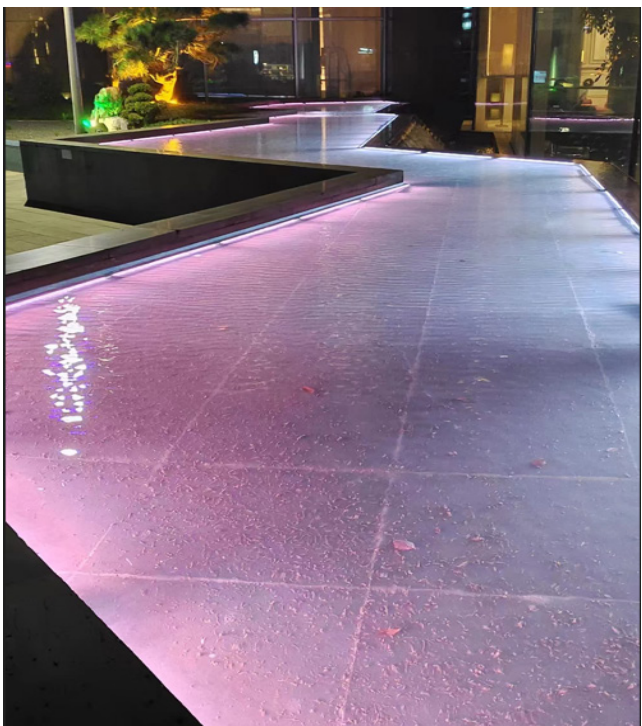

CE IP68 IK09


3 Years Warranty

IP68 waterproof for both of underwater or without water
It can be used as underwater linear light or wall washer or tri-proof linear light
Two brackets as options


Parameter	
General Data	
Item No.	SL-T12-1200(RGBW)-A(0.5M) / SL-T12-2400(RGBW)-A(1M)
Power	0.5M: 12 W / 1M: 24 W+10%
LED type	0.5M: 12 PCS / 1M: 24 PCS CREE CLQ6A RGBW LED
Luminous flux	0.5M: 600lm / 1M: 1200 lm +10% (all LEDs on)
CCT	RGBW(W:3000K/4000K/5700K)
CRI	80+ for VV
Beam angle	15°,20°,40°, or oval lens 15°x20°,15°x60°
Dimension	Ø45x1000 (mm) Diameter x length (300mm ,500mm length version optional)
Cut out	/ mm
Net weight	0.5M:1.6kgs , 1M: 3.2kgs
Warranty	3 years
Certifications	CE
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 2M H05RN-F 5x0.75mm square
Driver	DMX 512 decoder PCB built-in
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK09
Housing	Tin brass chrome plated ends+PC tube with Aluminium housing inside
Protection finishing	Anodized for inside Aluminium
Trim	PC
Glass	/
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Spike	SS316 L brackets
Packaging	
Inner box size	60*60*1230 mm for 1M
Carton size	125*26.5*14.5 cm (8 PCS/carton) for 1M

PLAYLITE®


Xlinear Maxi RGB

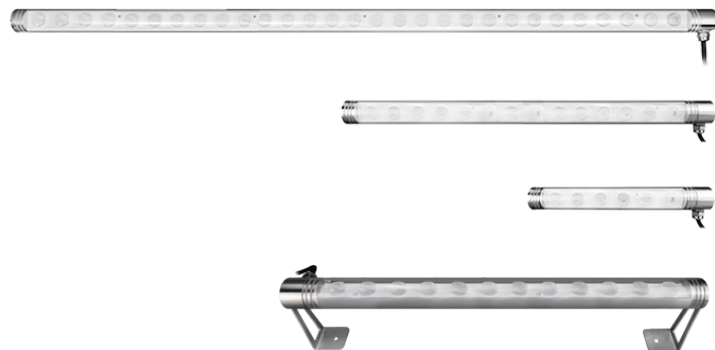


Dimension




Light Distribution Curve (1M RGB,15°x20°)

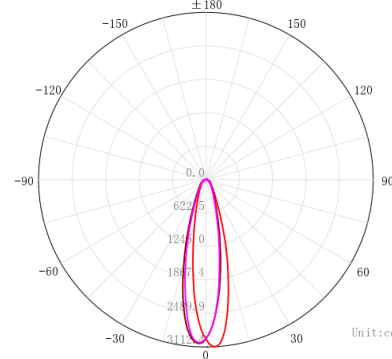

Lux distance Curve (1m RGB,15°X20°)

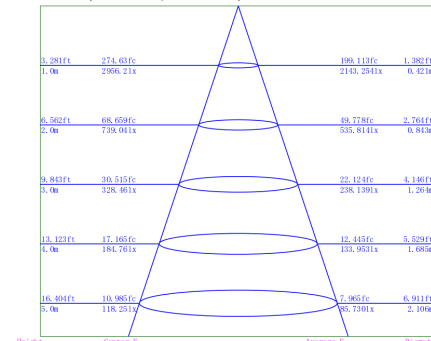

Illumination Picture

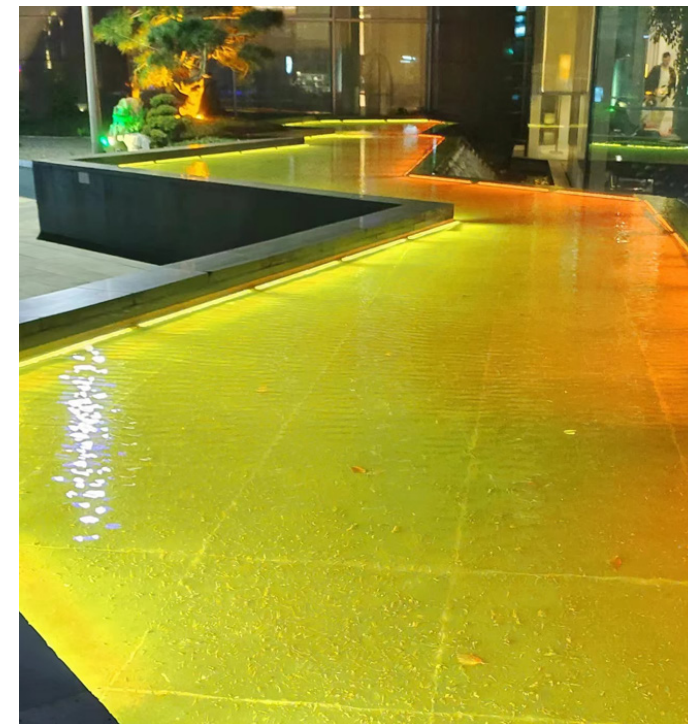

CE IP68 IK09

3 Years Warranty

IP68 waterproof for both of underwater or without water
It can be used as underwater linear light or wall washer or tri-proof linear light
Two brackets as options

Parameter	
General Data	
Item No.	SL-T12-0600-RGB-A-0.3M / SL-T12-0900-RGB-A-0.5M / SL-T12-1800-RGB-A-1M
Power	0.3M: 6 W / 0.5M: 9W / 18W +10%
LED type	6 PCS / 12 PCS / 24 PCS 3030 RGB 3in1 LED
Luminous flux	770lm +10% (all LEDs on) for 1M
CCT	RGB
CRI	/
Beam angle	15°,20°,40°, or oval lens 15°x20°,15°x60°
Dimension	Ø45x1000 (mm) Diameter x length (300mm ,500mm length version optional)
Cut out	/ mm
Net weight	0.5M:1.55 kgs , 1M: 3.15kgs
Warranty	3 years
Certifications	CE
Electrical Data	
Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 2M H05RN-F 4x0.75mm square
Driver	DMX 512 decoder PCB built-in
Construction Data	
IP rating	IP68 Waterproof
IK rating	IK09
Housing	Tin brass chrome plated ends+PC tube with Aluminium housing inside
Protection finishing	Anodized for inside Aluminium
Trim	PC
Glass	/
Loading capacity	/
Cable Gland	PG gland
Gasket	silicone ring + silicone glue seal
Accessories	
Bracket	SS316 L brackets
Packaging	
Inner box size	60*60*1230 mm for 1M
Carton size	125*26.5*14.5 cm (8 PCS/carton) for 1M

XLINEAR LIGHTS SERIES

XLINEAR LIGHTS SERIES

