

Refrigerated | High speed | Benchtop

TGL-17



Order No.:0104040000

TGL-17 is a intelligent, versatile high speed refrigerated centrifuge runs up to 18500rpm. The centrifuge is a large capacity model which can accommodate 0.2ml to 250ml tube/bottle. Fixed angle rotors are compatible with tubes 0.2ml to 100ml. Swing out rotors are compatible with 1.5ml to 250ml tube or bottle, blood tube and microplate. With its leading technologies and many user-friendly functions,it can perfectly meet your centrifugal needs.

We solve two core safety risks

Risk one:Overspeed operation
Solution: Automatic rotor identification to prevent over speed operation

Automatic rotor identification by RFID

- 1. Static identification. Just put in the rotor, recognize rotor without running.
- 2. Prevent overspeed. User cannot set RPM/RCF over the rotor's limit.
- 3. More information. Besides rotor's max speed,centrifuge can identify information such as rotor capacity,production time and remaining life time.
- 4. Can recognize much more rotors

Risk two:Unbalanced operation
Solution: Imbalance detection in the whole operation process & automatically stop

Imbalance sensor:Three axis gyroscope


- 1. Detect imbalance in the whole operation process.
- 2. Adjust imbalance point automatically.
- 3. Automatic stop when reach imbalance point.
- 4. Imbalance detection is more accurate



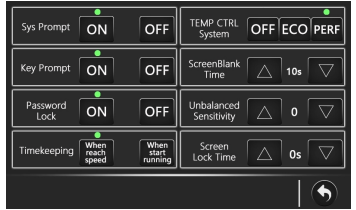
LCD touch screen

- >Simple and clear to show all parameters
- >Touch screen,easy to set parameters
- >RCF can be set directly
- >Intelligent status display,real-time and real values
- >User can set parameters even with gloves
- >User can reset parameters when rotor is spinning

PROGRAM	ROTOR	SPEED	TIME	TEMP	ACC/DEC
001	CX	12X1.5mL 10000rpm 6987Xg	00:05:00	4	02/02
002		24X2mL 1001rpm 104Xg	00:05:00	4	02/02
003		12X1.5mL 1001rpm 70Xg	00:05:00	4	02/05
004		12X1.5mL 1001rpm 70Xg	00:05:00	4	02/03
005		12X1.5mL 1001rpm 70Xg	00:05:00	4	02/02



	1	2	3	4	5	6	7
Speed	12000	15000	11000	8000	9000	10000	15000
Time	00:01:00	00:01:00	00:01:00	00:01:00	00:01:00	00:01:00	00:01:00
Temp	4	4	4	4	4	4	4
Rotor	12X1.5mL	Acc 02	Dec 04	Add	Del		














FEATURES

<h3>— User-friendly functions</h3> <ul style="list-style-type: none"> >up to 1000 user-defined programs >up to 100000 run histories,can be exported via USB >up to 40 rates acceleration and deceleration,speed downs curvelly slowly from 600rpm to 0rpm to prevent samples shake >up to 7 stages multi-stage centrifugation mode available >up to 99h59m59s timer range, 1s increment >Support short spin and continuous centrifugation >Reservation:can reserve cooling,turn on and turn off time >Curve display---Speed curve,RCF curve and Temperature curve are displayed together,clear to see their changing and relations. 	<h3>— Refrigeration</h3> <ul style="list-style-type: none"> >High quality compressor unit >-20°C to +40°C ,1°C increment >±1°C high temperature accuracy >CFC-free refrigerant >PID dynamic temperature control >Temperature sensor inside the chamber >Starts refrigeration when power on >Maintains refrigeration after spin >With ECO energy-saving module
<h3>— Ensure safety</h3> <ul style="list-style-type: none"> >Automatic rotor identification by RFID >Imbalance detection by three axis gyroscope >Motorized electronic door lock >Door cannot be opened when rotor is spinning >Gas hinge to prevent door falling >Port in the door for calibration and operation checking >Emergency door lock release >Password to lock the device >User management with permission allocation >Various protections to ensure safe centrifugation >With never be lost electronic instruction manual 	<h3>— Good components</h3> <ul style="list-style-type: none"> >Motor: Brushless variable frequency motor. stable running,maintenance free,long life >Housing: Thick and strong steel >Chamber: 316 stainless steel with teflon coating. anticorrosion and easy to clean >Rotor: Aluminum alloy fixed angle rotor; Steel/Stainless steel swing out rotor. >Rotors are autoclavable



TECHNICAL DATA

Max Speed	18500rpm
Max RCF	30025xg
Max Capacity	4x250ml
Temperature Range	-20°C ~ +40°C
Temperature Accuracy	±1°C
Speed Accuracy	±10rpm
Time Setting	1s ~ 99h59m59s
Noise	≤56dB(A)
Power Consumption	1200w
Dimension	580x640x375mm
Weight	84kg



AVAILABLE ROTORS



Fixed angle rotor					
Rotor	Capacity	Order No.	Max speed/RCF	Adaptor	
				Capacity	Order No.
	12×1.5/2ml	0494020200	18500rpm/23952×g	12×1×0.2ml	1101010001
				12×1×0.5ml	1101010002
	24×1.5/2ml	0494020600	15000rpm/21809×g	24×1×0.2ml	1101010001
				24×1×0.5ml	1101010002
	24×1.5/2ml aerosol tight	0494020500	17600rpm/30025×g	24×1×0.2ml	1101010001
				24×1×0.5ml	1101010002
	36×1.5/2ml	0494020800	13000rpm/16362×g	36×1×0.2ml	1101010001
				36×1×0.5ml	1101010002
	48×1.5/2ml	0494020900	12000rpm/15793×g	48×1×0.2ml	1101010001
				48×1×0.5ml	1101010002
	12×5ml	0494030200	15000rpm/18287×g	12×1×1.8ml frozen storage tube	1101020002
				12×1×2ml frozen storage tube	1101020004
				12×1×2ml	1101020001
	6×10ml	0494040100	16000rpm/19004×g	6×1×2ml	1101030001
				6×1×5ml	1101030002
	12×10ml	0494040200	14000rpm/18121×g	12×1×2ml	1101030001
				12×1×5ml	1101030002
	8×15ml conical tube	0494050100	13000rpm/14945×g	8×1×5ml	1101040001
				8×1×10ml	1101040002
	12×15ml conical tube	0494050200	12000rpm/15906×g	12×1×5ml	1101040001
				12×1×10ml	1101040002
	6×30ml	0494060100	13000rpm/15927×g	6×1×5ml	1101050002
				6×1×10ml	1101050001

AVAILABLE ROTORS

Fixed angle rotor					
Rotor	Capacity	Order No.	Max speed/RCF	Adaptor	
				Capacity	Order No.
	6×50ml round tube	0494070100	12000rpm/15712×g	6×1×2ml	1101060003
				6×1×5ml	1101060004
				6×1×10ml	1101060001
				6×1×15ml conical tube	1101060005
				6×1×30ml	1101060002
	6×50ml conical tube	0494070200	12000rpm/15712×g	6×1×2ml	1101070003
				6×1×5ml	1101070004/conical tube 1101070005/round tube
				6×1×7ml	1101070012
				6×1×10ml	1101070006/glass tube 1101070007/conical tube 1101070008/round tube
				6×1×15ml conical tube	1101070001
				6×1×25ml	1101070010
				6×1×50ml round tube	1101070002
	8×50ml round tube	0494070400	11000rpm/13365×g	8×1×2ml	1101060003
				8×1×5ml	1101060004
				8×1×10ml	1101060001
				8×1×15ml conical tube	1101060005
				8×1×30ml	1101060002
	8×50ml conical tube	0494070500	11000rpm/14041×g	8×1×2ml	1101070003
				8×1×5ml	1101070004/conical tube 1101070005/round tube
				8×1×7ml	1101070012
				8×1×10ml	1101070006/glass tube 1101070007/conical tube 1101070008/round tube
				8×1×15ml conical tube	1101070001
				8×1×25ml	1101070010
				8×1×50ml round tube	1101070002

AVAILABLE ROTORS

Fixed angle rotor					
Rotor	Capacity	Order No.	Max speed/RCF	Adaptor	
				Capacity	Order No.
	12×50ml conical tube	0494070700	8000rpm/9158×g	12×1×2ml	1101070003
				12×1×5ml	1101070004/conical tube 1101070005/round tube
				12×1×7ml	1101070012
				12×1×10ml	1101070006/glass tube 1101070007/conical tube 1101070008/round tube
				12×1×15ml	1101070001/conical tube
				12×1×25ml	1101070010
				12×1×50ml	1101070002/round tube
	4×100ml	0494080100	11000rpm/13365×g	4×1×5ml	1101080007
				4×1×10ml	1101080001
				4×1×15ml conical tube	1101080002
				4×1×30ml	1101080003
				4×1×50ml	1101080005/conical tube 1101080004/round tube

Swing out rotor					
Rotor	Capacity	Order No.	Max speed/RCF	Adaptor	
				Capacity	Order No.
	Capacity: 2×3×96 well (micro plate)	0495010300	4000rpm/2003×g	2×24×1.5/2ml	1102040001
	Capacity: 4×250ml	0495040200	4500rpm/3735×g	4×8×2ml	1102050001
				4×8×2ml frozen storage tube	1102050015
				4×8×5ml	1102050010
				4×5×5ml conical tube	1102050002
				4×10×7ml blood tube	1102050013
				4×9×10ml	1102050014
				4×5×15ml conical tube	1102050003
				4×2×30ml glass tube	1102050012
				4×2×50ml	1102050004/conical tube 1102050005/round tube
				4×1×100ml	1102050006