CONTACT US

Company Name:
Guangzhou Yongzhu Steel Structure Co., Ltd
Address:
Room 1002, Yihe Business Building, No. 2, Yihe Road, Beijiao Town, Shunde District, Foshan City (Yongzhu Group).
Mobile Phone:
+86 13380506803 / +86 15322043305
Email:
cnrosenlu@gmail.com

10+ SOURCE MANUFACTURER

FOCUS ON CONTAINER HOUSES AND STEEL STRUCTURE BUILDINGS.

YONGZHU YONGZHU

YONGZHU

CREATE HIGH-QUALITY PRODUCTS

FIRST CLASS CORPORATE IMAGE

CATALOGUE

YONGZHU has rich professional experience in the production of Container Living Houses.YONGZHU has transformed into a comprehensive enterprise integrating production and sales through 12 years of development, a total of more than 7,000 enterprise units, the existing 5 plants, respectively located in Guangzhou,Foshan, Hainan, Dongguan, Shenzhen andother places, Foshan base 10,000 square meters.

COMPANY INTRODUCTION	02 / 03
FLAT PACK CONTAINER HOUSE	04 / 07
QUICK ASSEMBLY CONTAINER HOUSE	08 / 11
FLODING CONTAINER HOUSE	12 / 15
Z-SHAPED FLODING CONTAINER HOUSE	16 / 19
DOUBLE WING EXPANDABLE CONTAINER HOUSE	20 / 23
SPACE CAPSULE	24 / 27
K/T PREFABRICATED HOUSES	28 / 31
TEMPORARY FENCE	32 / 35
FACTORY	36 / 41
COOPERATIVE PARTNER	42 / 43

COMPANY INTRODUCTION

GZ Yongzhu has a wealth of professional knowledge and experience in the production of fences. GZ Yongzhu container houses,flat pack container house from the raw material supplier set sail, through 16 years of development transformation into a comprehensive enterprise integrating production and sales.

From 2014 to the present, the main business is the supply of materials for prefabricated house. It has successively cooperated with state-owned enterprises and central enterprises such as China State Construction, China Railway, Guangzhou Municipal Government, Guangzhou Machinery and Hydropower, as well as a large number of private private enterprises, serving more than 9000+ enterprise units, and has established a deep cooperative relationship with partners, since 2014, it has transformed into a professional prefabricated houses manufacturer, and officially devoted itself to product industry, in order to better serve customers, reflect the company's advantages and strength, and make product prices low and product quality good. Strive to achieve outstanding status in the industry.

GZ Yongzhu prefabricated houses from the source of raw materials, to the installation and construction of the foundation, to the construction and operation of the service system, has a comprehensive service capacity and business coverage.

COMPANY QUALIFICATION

Business license

High tech Enterprise Certificate

Tax Credit A-level Honor Certificate

Construction Enterprise Qualification Certificate

Security License

Certyfikat CE

Flat Pack Container House

Flat pack container houses, which feature a roof and floor that are both integrally welded and formed, boast excellent structural stability and waterproof performance. Due to their structural design, the height of the layers can be customized to 3.5 meters high, and can be constructed as a single, double, or triple-story building. The walls come in thickness options of 50mm, 75mm, or 100mm, and are suitable for use as offices, shops, post stations, hotel accommodations, temporary hospitals, outdoor accommodations, schoolroom,church, etc.

Product parameters

Flat Pack Container House	Exterior（L*W*H）	6055*2990*2896 / 5900*2435*2896		
	Interior(L*W*H)	5890*2830*2540 /5730*2270*2896		
Parameter	Thermal insulation	λ=0.048W/m·K	Wind resistance	0.60kN/m²
	Sound insulation	Sound insulation≥30dB	Fire performance	A Grade
	Water resistance	360-degree bite, organized drainage, precipitation of 16mm/min without leakage	Seismic performance	8 Grade
	Ground load	2.0kN/m²	Roof load	1.1kN/m²
Structure	Main profiles	Ground beam: 160mm, galvanized beam 2.75mm thick; Ground secondary beam: specification of several steel 120*1.2mm thickness *9 galvanized section steel; Column: 210*150mm, galvanized beam 2.75mm thick; Roof beam: 180mm, galvanized beam 2.5mm thick; Roof secondary beam: 80*40*1.3mm thick galvanized C-beam 7.		
	Structural connections	M12×30 high-strength bolts		
	Surface treatment	Electrostatic spraying of plastic powder baking paint		
Wall Panels	Rock wool Panels	The thickness of the color steel composite plate is 75mm, the width is 1150mm, the thickness of the color steel plate is 0.376mm, the PE film is attached, the color is white and gray, the double-sided flat plate is not embossed, the bulk density of rock wool is 80kg/m³, and the combustion performance is Class A non-combustible.		
Roof	Roofing panels	Roof tile: color steel veneer occlusion thickness 0.476mm, 360° occlusion		
	Heat insulation	Glass wool roll felt, thickness 50mm, bulk density 14kg/m³, combustion performance of Class A non-combustible.		
	Ceiling	831 Suspended Ceiling Panels		
Floor	Structural panel	Cement fiber board (calcium silicate board), thickness 18mm		
	Floor leather	Wear-resistant layer of plastic tape floor glue, thickness 1.6mm		
Door	Entrance door	Steel set door, size ≥W840mm×H2040mm, high-grade fireproof door lock		
Window	Exterior windows	UPVC Series Plastic Steel Sliding Window, Size: W1125mm×H1100mm×2; 5+9A+5 insulating glass with anti-theft mesh with screen.		
Decoration	Interior decoration corners	Color steel edging 0.45mm color steel folding, baseboard PVC (brown)		
Electrical	Purifying lamps	LED strip light×2 sets, 40W/set		
	Socket	3pc x 10A 5-pin sockets× or 3pc x 36V low-voltage 4-pin USB panels, 1pc x 16A air conditioner socket.		
	Switch	1pc x Single-key switch		
	Distribution box	1pc x Concealed electrical box		
	CEE Industrial Plugs	1pc x 220V,50Hz,3P32A		
	Cables	Entrance line: 3 * 6 square, air conditioning socket: 3 * 4 square, five-hole socket: 3 * 2.5 square, lighting: 2 * 1.5 square.		

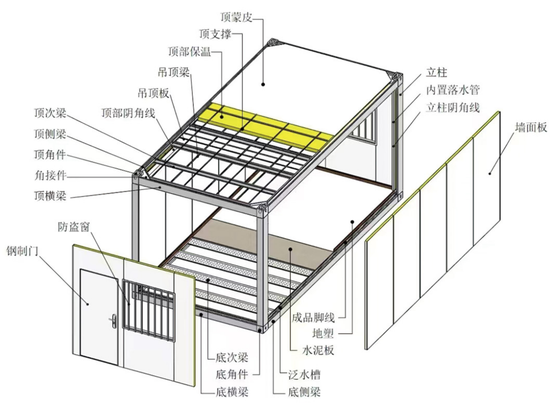

Product Features

Security:

It can withstand earthquakes of magnitude 8 and has a wind resistance level of eleven.

Heat preservation:

The thermal conductivity coefficient k=0056w/mK, and the insulation effect is 7 times that of a brick wall of the same thickness.

Durable:

The main structure has a lifespan of over 15 years.

Products case

Quick assembly container house

As an innovative modular building solution, fast consolidated container houses are reshaping the market landscape of modern temporary and semi permanent buildings with their three core advantages of "efficient construction, flexible configuration, and green environmental protection". This architectural form can achieve construction efficiency that traditional buildings cannot match through standardized design, factory prefabrication, and on-site modular assembly technology.

Product parameters

Size	Outer Dimensions	L5950mm*W3000mm*H2800mm		
	Inside Dimensions	L5750mm*W2800mm*H2540mm		
Index	Thermal insulation performance	λ=0.048W/m·K	wind-resistant performance	0.60kN/㎡
	Sound insulation performance	≥30dB	Fire performance	Grade A.
	Waterproof performance	360 degree bite, organized drainage, with a precipitation of 16mm/min and no leakage	Seismic performance	Grade 8.
	Ground live load	2.0kN/㎡	Roof live load	2.0kN/㎡
Structure	Main profiles	Thickness of galvanized floor frame beam: 2.3mm; Thickness of galvanized roof frame beam: 2.3mm; Thickness of precision rolled galvanized column: 2.3mm; material: 235		
	Structural connectivity	M12×35 High strength carriage bolts		
	Surface Treatment	Electrostatic spraying plastic powder baking paint		
Wallboard	Rock wool sandwich panel	The thickness of the color steel composite plate is 50mm,The Thickness of color steel plate is 0.3mm,the color istraffic white,and the double-sided flat plate has noembossing; The bulk density of rock wool is 60kg/m ³, andits combustion performance is Class A non combustible.		
Roof	Structural flooring	Roof tiles: 980 color steel veneer,Thickness 0.42mm.		
	Layer for heat preservation	Glass wool roll felt, thickness 40mm, bulk density 14kg/m³, with Class A non combustible combustion performance.		
	suspended ceiling	Type 980 strip ceiling board，0.25mm		
Ground	Structural flooring	Glass magnesium high-strength flooring, thickness 18mm		
Doors	Doors	Steel set door, size ≥ W920mm × H2040mm, Stainless steel door lock		
Windows	Windows	Aluminum alloy windows, size: W920mm × H1200mm equipped with anti-theft measures		
Decoration	Interior decoration corner	Dark corner40*40*0.5mm steel color folding parts		
Electric	Lights	2 sets of LED lights		
	Power Distribution Box	Leakage protection switch x 1		
	Socket	1 16A air conditioning socket、4 10A ordinary socket		
	Switch	switch x 1		
	Wiring (cable)	Entry line: 4 square meters, air conditioning socket: 4 square meters,ordinary socket: 2.5square meters, lighting:1.5 square meters		

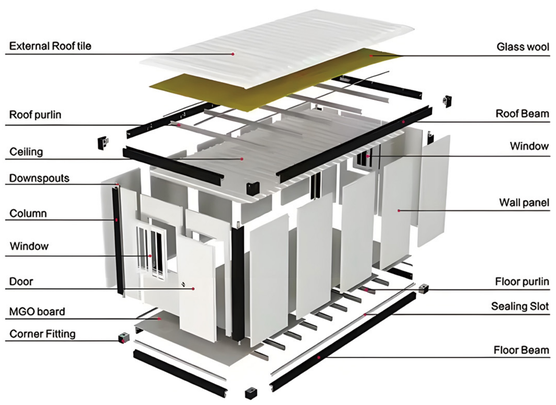

Product Features

Efficiency:

Fast construction, factory prefabrication completed, on-site assembly only required.

Appearance:

The appearance can be customized with colors and exterior wall decorations to better integrate into the environment.

Cost:

Large scale production reduces unit price and requires less on-site.

Products case

FLODING CONTAINER HOUSE

Compared to traditional container houses, foldable container houses can be folded, making transportation easier, reducing installation and costs, and minimizing waste. This can provide users with a more spacious living space faster, and it brings basic privacy to residents. Foldable container houses may seem simple, but they can meet diverse basic living needs and are more like a home. In situations where living conditions are urgently needed, such as emergency rescue or natural disasters, they can quickly support living conditions. It is recommended to use them in areas with less rainfall or with a roof.

Product parameters

Size	Outer Dimensions	L5800mm*2460mm*2430mm		
		L5640mm*2320mm*2380mm		
Index	Roof live load	1.0kN/㎡	wind-resistant performance	0.60kN/㎡
	Fire performance	Grade A.	Seismic performance	Grade 8.
Index	Top structure	Q235 Galvanized square tube	30*50*2.32m	T=1.5mm
		Hetero type piece		T=1.5mm
		Galvanized square tube	60*60*5.8m	T=1.5mm
		Galvanized flat iron		T=2.0mm
		EPS Integrated panel	#50	T=0.4mm
	6 Meter side	L-Shaped Steel plate	1.15m	T=1.15mm
			1.165m	T=1.15mm
		Galvanized P-shaped pipe	30*55*5.8m	T=1.15mm
			1080mm	T=1.15mm
		Galvanized hinges	High intensity	
		Wall panel	1080mm*2.845m	T=0.25mm
		Color steel groove	1080mm	T=0.4mm
		Galvanized buckle groove	1080mm	T=1.2mm
		D-shaped Rubber strip	5.8m	
	3 Meter side	Galvanized P-shaped pipe	2.43m	T=1.15mm
			2.31m	T=1.15mm
		Galvanized buckle groove	2.45	T=1.13mm
			860	T=1.3mm
		Wall panel	950	T=0.25mm
		Galvanized angle	50#	T=1.3mm
		Window	925*930	T=0.4mm
		Door	970*1980	High-quality anti-theft doors
		Rubber strip		Seal dust proof
	Bottom structure	Galvanized P-shaped pipe	60*120*5.8m	T=1.15mm
			60*60*2.32m	T=1.15mm
		Hinge Q235B Galvanized square tube	High intensity 35*35*2.32m	T=1.5mm
		Floor	1125*2315	T=15mm
Roof	Overall framework coating	Electrostatic Powder Coating/Matte Grey		
Wall	6 Meter side	50mm EPS Composite color steel board 0.25mm		
	3 Meter side	50mm EPS Composite color steel board 0.25mm		
Floor	Glass magnesium flooring（15mm）			
Electrical system	All electrical products must be installed in strict compliance with moisture-proof standards and carry CE certification. Circuit connections shall adhere to electrical engineering specifications.，Indoor: incoming 2.5 square national standard soft copper wire, 1 20A circuit breaker, 1 three hole air conditioning socket, socket incoming 2.5 square meters, 1 five hole single socket, 1 five hole socket, 1 LED light			
Anti-theft door	High-quality anti-theft doors（Warm white）size:860mm*1980mm			
Window	925*930Single glass sliding window plastic steel window，Glass thickness 4 millimeters（Warm white）/925*930Single glass sliding window plastic steel window，Glass thickness 4 millimeters（Warm white）			

Product Features

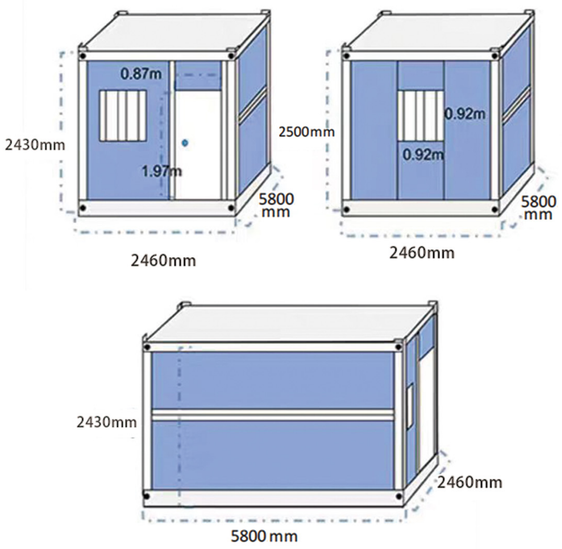

Economy:

The installation and disassembly process is simple and fast, greatly saving time and labor costs.

Flexible:

It can be quickly expanded and collapsed according to actual needs to adapt to different usage scenarios.

Durable:

Made of high-quality steel or high-strength materials, with compressive strength.

Products case



Z-shaped FLODING CONTAINER HOUSE

This is a Z-shaped folding container room that adds folding function on the basis of the flat packaging container room. It inherits the excellent waterproof and structural performance of the flat packaging container room, and can also fold, reducing installation time and minimizing losses. Similar to the application scenarios of flat packaging boxes, it can be used in offices, conference rooms, shops (convenience stores, cafes, vending machines), post stations, hotel accommodations, temporary hospitals, outdoor accommodations, classrooms, churches, and more.

Product parameters

Size	Outer Dimensions	L5900mm*W2435mm*H2500mm		
	Inside Dimensions	L5730mm*W2275mm*H2140mm		
Index	Thermal insulation performance	λ=0.048W/m·K	wind-resistant performance	0.60kN/㎡
	Sound insulation performance	≥30dB	Fire performance	Grade A.
	Waterproof performance	360 degree bite, organized drainage, with a precipitation of 16mm/min and no leakage	Seismic performance	Grade 8.
	Ground live load	2.0kN/㎡	Roof live load	1.0kN/㎡
Structure	Main profiles	Ground main beam: 160mm, T= 2.7.5mm; Ground secondary beam: 120*T= 1.1mm*C section steel ×9 Column: 210 * 150mm galvanized beam, T=2.75mm; Roof main beam: 180mm galvanized beam, T= 2.5mm; Roof secondary beam: 80 * 40mm galvanized C-shaped steel ×7, T=1.1mm		
	Structural connectivity	M12×30 High strength bolts		
	Surface Treatment	Electrostatic spraying plastic powder baking paint		
Wallboard	Rock wool sandwich panel	The thickness of the color steel composite plate is 75mm, the width is 1150mm, the thickness of the color steel plate is 0.376mm, the PE film is attached, the color is white gray, and the double-sided flat plate has no embossing; The bulk density of rock wool is 60kg/m ³, and its combustion performance is Class A non combustible.		
Roof	Structural flooring	Roof tiles: Color steel veneer with a bite thickness of 0.476mm and a 360 ° bite		
	Layer for heat preservation	Glass wool roll felt, thickness 50mm, bulk density 14kg/m ³, with grade A non combustible combustion performance.		
	suspended ceiling	831mm color steel plate		
Ground	Structural flooring	Cement fiber board, (calcium silicate board) thickness 18mm		
	Floor leather	PVC floor glue, thickness 1.6mm.		
Doors	Doors	Steel set door, size ≥ W840mm × H2035mm, anti-theft lock		
Windows	Windows	Upvc series plastic steel sliding window, size: W1130mm × H1100mm × 2 pieces; 5+9A+5 insulated glass with anti-theft mesh and screen window		
Decoration	Interior decoration corner	Color steel edge wrapped 0.45mm color steel folding piece, PVC skirting board (brown)		
Electric	Purification lamp	2 sets of LED lights, 40W per set		
	Socket	3 10A five hole sockets (or 3 36V low-voltage 4-pole USB panels), 1 16A air conditioning socket		
	Switch	Single key switch x 1		
	Power Distribution Box	Concealed distribution box x 1		
	CEE Industrial Plug	220V, 50Hz,3P32A×1		
	Wiring (cable)	Entry line: 3 * 6 square meters, air conditioning socket: 3 * 4 square meters, five hole socket: 3 * 2.5 square meters, lighting: 2 * 1.5 square meters		

Product Features

Durable:

High strength flexibility and compression resistance, not easily deformed or broken when folded.

Transport cost:

After folding, the thickness is significantly reduced, saving storage and return transportation space.

Quality:

Equipped with waterproof and shockproof functions, suitable for outdoor residential buildings.

Products case

Double Wing Expandable Container House

Double-wing Expandable Container House is an expandable container house with a wide range of applicability and strong adaptability.This flexibility can be customized and personalized as needed to meet the needs of different lengths of time, providing flexible, mobile residential or commercial space solutions for various sectors. Its design allows it to greatly reduce labor and save transportation space during transportation and installation.

Product parameters

Product custom size	
720 External standard size	5900*4830*2530mm
20FT External standard size	5900*6420*2530mm
30FT External standard size	9000*6420*2530mm
40FT External standard size	11800*6420*2510mm
2.4m height 20FT External standardsize	5900*6420*2560mm
2.4m height 40FT External standardsize	11800*6420*2560mm
Usage	House,Office,Dormitory,Shop,Bar,Emergency Room,Disaster Relief Room
Advantages	1.Large space,Large -sized windows anddoor.20ft 40ft can be choose,also supply customized according to your demand 2.Easy andfast installation.4 hours/set,save labor cost 3.Pre-build the electricity and water plumbing,bathroom fittings 4.Waterproof wall board integrated design
Product details	
Main Material	Galvanized steel structure with sandwich panel wall and doors,window,ets.
Color	White,Charcoal or according to customer's requirement.
Steel Structure	3mm Hot galvanized steel structure with 4 corner casts and 18mm fiber cement board; 1.8mm PVC flooring;50mm rock woll,EPS or PU sandwich panel;Galvanized steel base plate.
Roof	3-4mm Hot galvanized steel structure with 4 corner casts and 50mm -70mm EPS or PU sandwich panel;Galvanized steel roof covering.
Columns	3mm Hot galvanized steel structure.
Wall	50/75/100mm EPS/Rock woll/PU sandwich panel.
Door	Made of steel/aluminum frame,Broken bridge aluminum.Dimension W1930mm*2100mm glazed with double glass in a thickness of 5/8/5mm. Can be customized according to demand.
Window	Made of PVC/aluminumfame,Broken bridge aluminum.Dimension W1125mm*H1100mm,glazed with double glass in a thickness of 5/8/5mm.
Floor	The load-bearing floor material of the three units is 18mm thick cement sanding board,which has high flatness,moisture resistance and waterproof strength.
Connection Kits	PVC connection kits for floor,ceiling,walls.
Electricity	3C/CE/CL/SAA Standard,with distributionboxlights,switch,sockets,etc.
Optional	A/C,office,dormitory,Toilet,kitchen,bathroom,shower,steel roof,electrical appliarce.
Accessory	for accomodation,cadding panels,decorative material,furniture,sanitary,kitchen,rtc.
Product features	
Water proof	99.9999%
Fireproofing	Grade A
Withstand wind	120km/h
Anti-seismic	Grade10
Sound insulation	≥30 dB
Roof live load	1.0kn/m²
Floor liye load	2.5kn/m2
Wall live load	1.0kn/m2
Service Life	30~40years

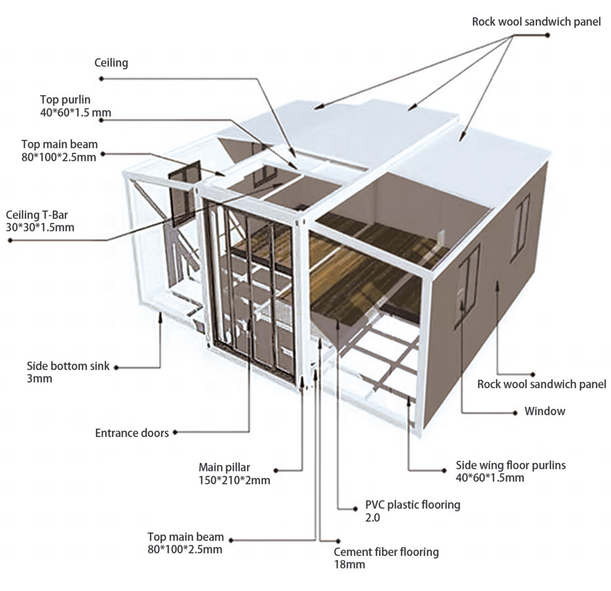

Product Features

Practical:

Can be quickly unfolded and folded, with a beautiful and elegant appearance.

Intelligent control:

Remote control can be achieved through mobile apps or intelligent voice assistants.

Environment protection

Made of environmentally friendly materials, recyclable, and with good durability.

Products case

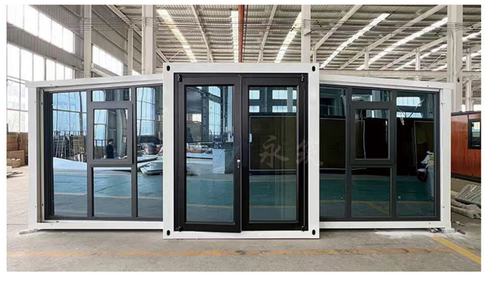

Space Capsule

The capsule has the characteristics of environmental protection and low carbon, energy saving and heat preservation, and convenient movement, especially the thermal insulation effect is obvious. It is also equipped with a solar-powered device, which can meet the demand for autonomous power supply when the sun is shining, greatly reducing energy consumption. The capsule can be used in many scenarios such as tourist attractions, campsites, and commercial blocks to meet people's needs for tourist accommodation and business reception.

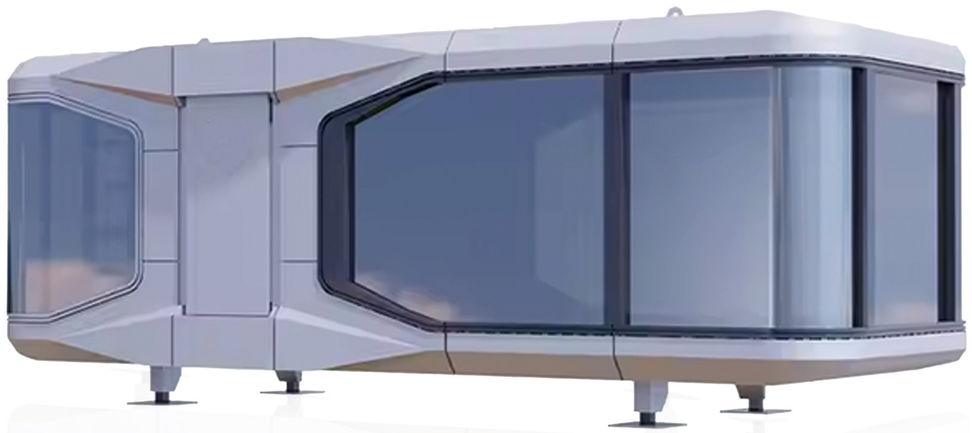

Product parameters

Model : E 3
L : 5.6M
W : 3.3M
H : 3.2 M
Weight : 4000KG



Model : E 5
L : 8.5M
W : 3.3M
H : 3.2 M
Weight : 5000KG

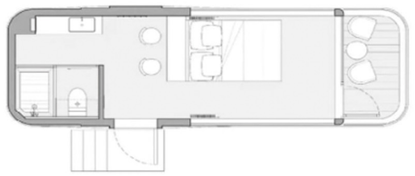

Model : E 6
L : 8.5M
W : 3.3M
H : 3.2 M
Weight : 5500KG

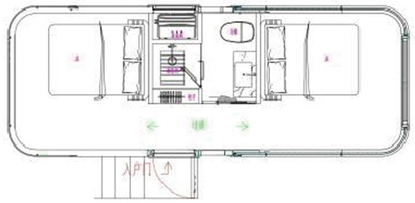

Model : EX6
L : 9.5M
W : 3.3M
H : 3.2 M
Weight : 6000KG

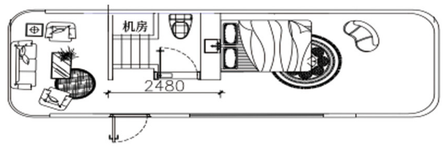

Model : E 7
L : 11.5M
W : 3.3M
H : 3.2 M
Weight : 7500KG

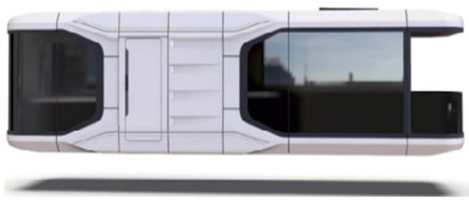

Model : E 9
L : 11.5M
W : 3.3M
H : 3.2 M
Weight : 7500KG



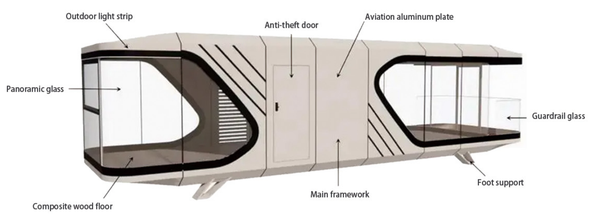

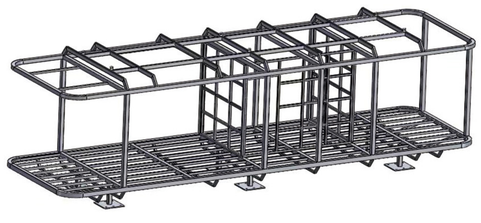

Product Features

Experience:

For travelers who pursue novelty and a sense of technology, it is a unique travel experience.

Customized:

We can customize design and decoration according to customer needs, providing a personalized accommodation experience.

Flexible:

It can be easily disassembled and reassembled, making it easy to relocate to different locations.

Products case

K/T prefabricated houses

The K-shaped house consists of a steel structure and color steel sandwich panels. The main structure is assembled through bolts and connectors, and the wall panels are fixed by inserting them into the slots of the columns. Its design structure gives it strong wind resistance and stability. T-shaped houses are also composed of steel structures and color steel sandwich panels, but the materials used in T-shaped houses are more durable, aesthetically pleasing, safe, and free for secondary decoration compared to K-type panel houses. They have flexible internal layouts that can be arranged according to customer requirements, as well as customized single slope roofs, double slope roofs, and four slope roofs. It is widely used in temporary residences, offices, businesses, industries, temporary schools, hospitals, etc.

Product paramet

K style

Specifications: nK*nK*nP

K=1820mm,P=950mm,n=quantity

Common width:

3*1820+160=5620mm

4*1820+160=7440mm

序号	宽度	长度	高 度		
1	3K	nK	3P	6P	9P
2	3.5K	nK	3P	6P	9P
3	3K	nK	3P	6P	9P
4	4.5K	nK	3P	6P	9P
5	5K	nK	3P	6P	9P
6	5.5K	nK	3P	6P	9P

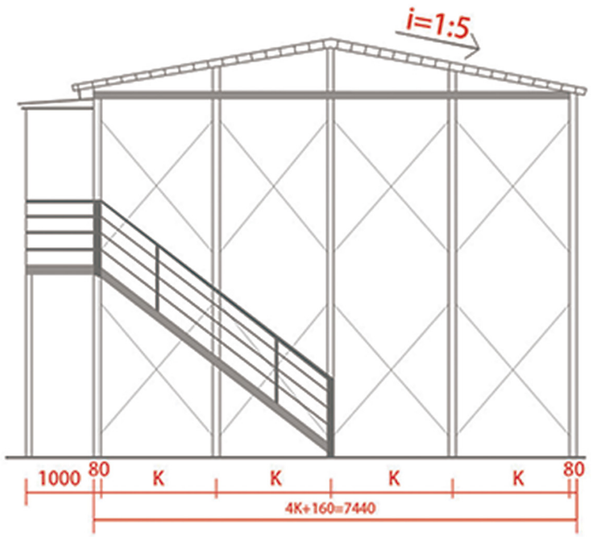

T style

Specifications: nT*nT*nH

T=1150mm,H=1000mm,n=quantity

The standard bay is 3T

The standard width is 5T

序号	宽度	长度	高 度	
1	4T	nT	3H	6H
2	5T	nT	3H	6H
3	5T	nT	3H	6H

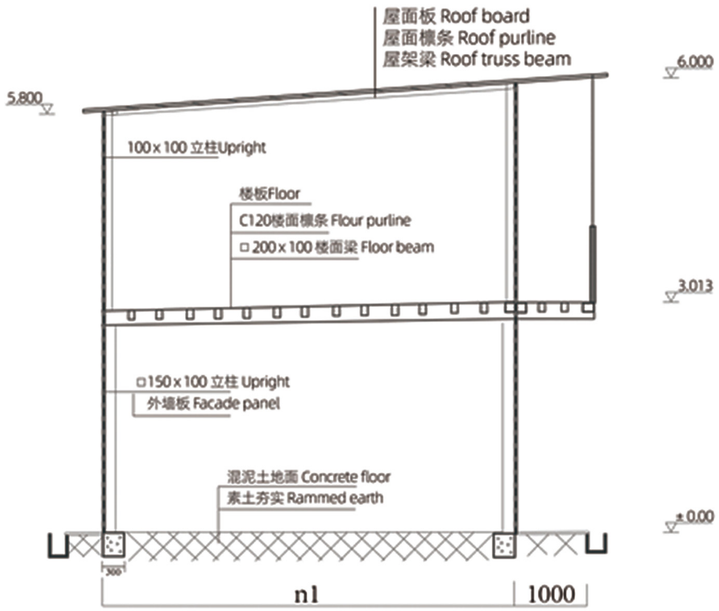

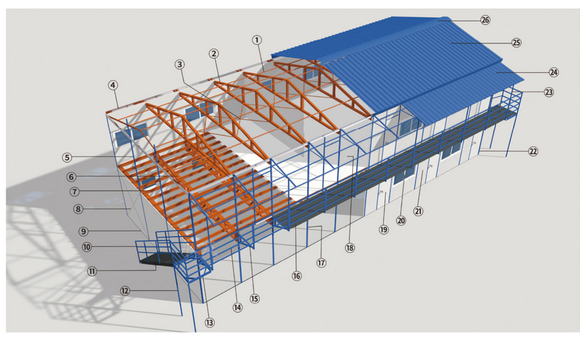

①屋面檩条 roof purline
②屋面梁 roof beam
③水平支持 level support
④圈梁 ring beam
⑤山墙立柱 gable upright
⑥楼面梁 floor beam
⑦楼面檩条 floor purline
⑧拉筋 tie piece
⑨地梁 grade beam
⑩楼梯扶手 stair railing
⑪楼梯 stairs
⑫平台托架立柱 platform bracket upright
⑬平台托架 platform bracket
⑭栏杆 railing
⑮走道托架 walkway bracket
⑯走道板 walkway board
⑰中柱 center pillar
⑱楼板 floor
⑲彩钢复合门 color-steel composite door
⑳塑钢推拉窗 plastic steel sash window
㉑外墙板 facade panel
㉒角柱 corner post
㉓雨蓬立柱 rain cover upright
㉔雨蓬 rain cover
㉕屋面瓦 roof tile
㉖屋脊瓦 crest tile

Product Features

Convenient:

Quickly build, easily disassemble and reassemble, adapt to changing space requirements.

Economics:

Low cost, its materials and construction methods are simpler and can be reused, thereby reducing costs.

Environment protection

Reusable, helps reduce the generation of construction waste.

Products case

K style

T style

Temporary Fence

Construction site fence is a kind of safety measure, which is a very effective measure to protect the normal operation of the construction site and avoid accidents of vehicles and pedestrians. A construction site fence, also known as a "guardrail, fence, fence", is a safety facility that can isolate the construction site from ordinary pedestrians. It can completely isolate workers from ordinary pedestrians, and effectively protect the safety of workers working on the construction site. Among them, the green plant fence is one of the fences, which can be used in municipal projects, not only with the effect of partitions, but also beautiful.

Product parameters

A1 model

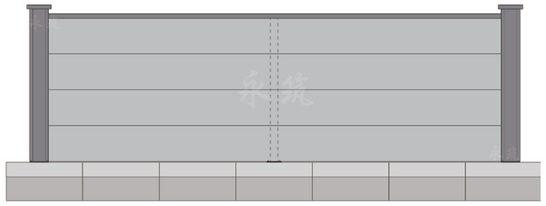

A1-1款围挡参数图
正立面图

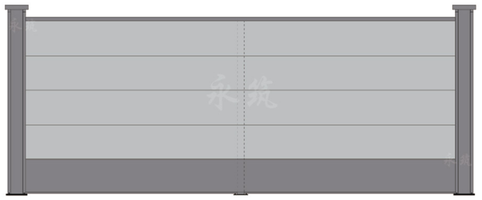

A1-2款围挡参数图
正立面图

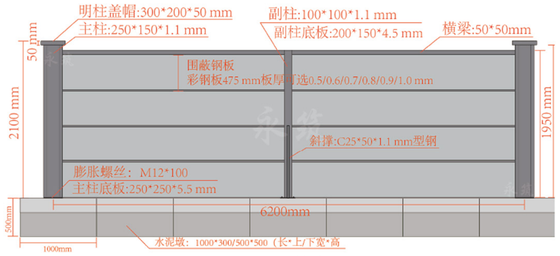

A1-1款围挡参数图
背立面图

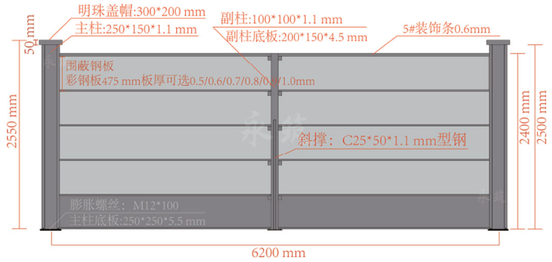

A1-2款围挡参数图
背立面图

A2 model

A2-1款围挡参数图
正立面图

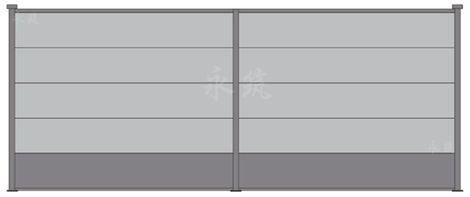

A2-2款围挡参数图
正立面图

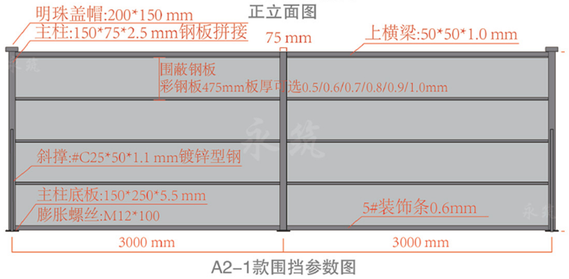

A2-1款围挡参数图
背立面图

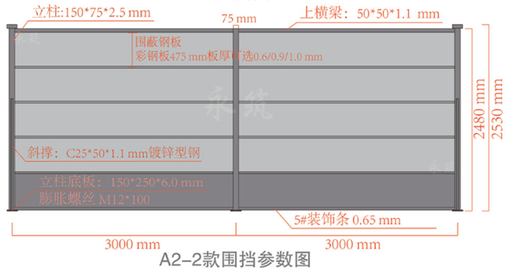

A2-2款围挡参数图



围墙类型：**A1-1款**优化版钢板围墙（6.2米一档） 2m

序号	材料名称	规格	厚度	备注
1	主柱	250*150折件立柱	1.1mm	
2	主柱底板	250*250	5.5mm	
3	副柱	□100*100	1.1mm	规格可选□80*80
4	副柱底板	200*150	4.5mm	
5	围蔽钢板	475*50彩钢板	可选	1272色*4块
6	横梁	□50*50	1.0mm	
7	斜撑	C25*50型钢	1.1mm	镀锌
8	膨胀螺丝	M12*100		
9	明柱盖帽	300*200		



围墙类型：**A1-2款**优化版钢板围墙（6.2米一档） 2.5m

序号	材料名称	规格	厚度	备注
1	主柱	250*150折件立柱	1.1mm	
2	主柱底板	250*250	5.5mm	
3	副柱	□100*100	1.1mm	规格可选□80*80
4	副柱底板	200*150	4.5mm	
5	围蔽钢板	475*50彩钢板	可选	1264*1块、1272色*4块
6	横梁	□50*50	1.0mm	
7	斜撑	C25*50型钢	1.1mm	镀锌
8	膨胀螺丝	M12*100		
9	明柱盖帽	300*200		



围墙类型：**A2-1款**优化版钢板围墙（3米一空） 2m

序号	材料名称	规格	厚度	备注
1	立柱	150*75钢板拼接	2.5mm	
2	立柱底板	150*250	5.5mm	
5	围蔽钢板	475*50彩钢板	可选	1272色*4块
3	上横梁	□50*50	1.0mm	
4	下横梁	□50*50	1.0mm	
6	斜撑	C25*50型钢	1.1mm	镀锌
7	膨胀螺丝	M12*100		
9	明柱盖帽	200*150		



围墙类型：**A2-2款**优化版钢板围墙（3米一空） 2.5m

序号	材料名称	规格	厚度	备注
1	立柱	150*75钢板拼接	2.5mm	
2	立柱底板	150*250	5.5mm	
3	围蔽钢板	475*50彩钢板	可选	1264*1块、1272色*4块
4	上横梁	□50*50	1.1mm	
5	下横梁	□50*50	1.0mm	
6	斜撑	C25*50型钢	1.1mm	镀锌
7	膨胀螺丝	M12*100		
9	明柱盖帽	200*150		

Product Features

Customized:

Diverse specifications and sizes, support customization, made of galvanized steel, thick and durable.

Facilitate:

The connection mode of plate, column and slant support adopts self tapping screw for easy installation and disassembly.

Beautiful:

Smooth and flat surface, vibrant colors, innovative and elegant structural design.

Products case

Gaoming Factory

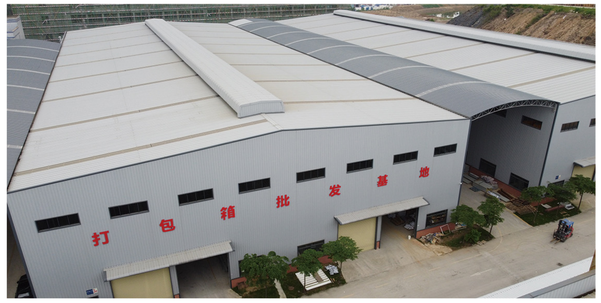

Foshan Gaoming District Mingcheng Town Chengliu Road factory, covering an area of 16,000 square meters, with a design and construction team of 40 people. From the source of raw materials, to basic installation and construction, to the construction of service systems and operational services, it has comprehensive service capabilities and business coverage. For a long time, it has received satisfactory evaluations and recognition from customers.

Video Introduction

“ Foshan Gaoming

Shunde Factory

Foshan Shunde District Daliang Street Liansheng Street factory, covering an area of 8,000 square meters, with a design and construction team of 30 people. It is a comprehensive sole proprietorship enterprise that focuses on the development, manufacturing, installation, and design, production, and marketing services of steel structure materials. It provides 24-hour service to meet customer requirements.

Video Introduction

" Foshan Shunde

Nansha Factory

Guangzhou Nansha District Lanhe Town Wenping Village Guangzhou-Zhuhai Road factory, covering an area of 8,000 square meters, with a design and construction team of 30 people. The site is spacious, efficient in manufacturing, conveniently located, and easy to transport. The factory is involved in material manufacturing, installation, product display, and direct transportation of plate packaging. On-site quality control, meticulous in every process.

Video Introduction

“ Guangzhou Nansha

CORE CUSTOMERS

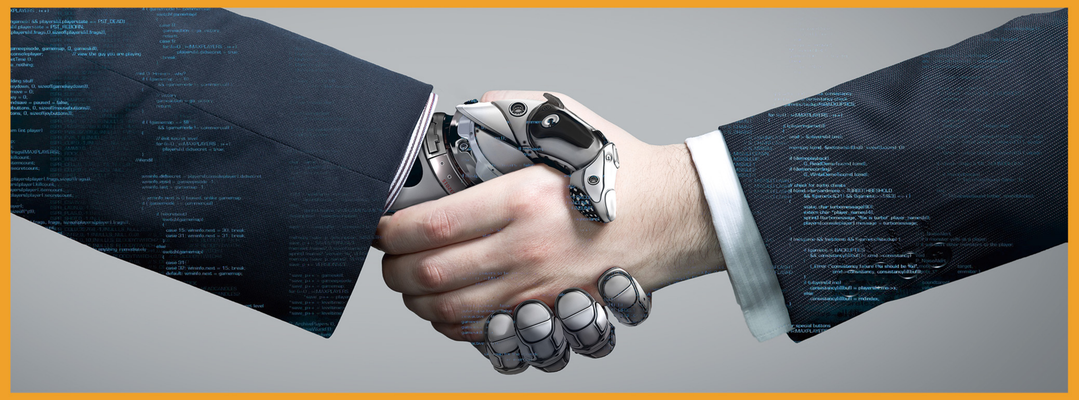

中国建筑 CHINA STATE CONSTRUCTION

中国中铁

中国交建 CHINA COMMUNICATIONS CONSTRUCTION

广州市政

中国电建

广东机施

中天建设

恒大集团 EVERGRANDE GROUP

龙光地产 LOGAN PROPERTY

COMPANY SERVICE

Since its establishment in 2010, the company has adhered to the business philosophy of "quality first, integrity first, and people-oriented", gradually establishing a scientific management system. It has set up comprehensive distribution institutions and service outlets in more than 10 provinces and cities across the country, backed by a strong service team, and established a well-known brand with eternal characteristics.

Our company adheres to the business philosophy of "providing satisfactory services to customers" and has cultivated a high-quality professional technical and on-site installation team to provide customers with comprehensive services. From project conception, design to production, construction and installation, we always put customers at the center and provide you with the most scientific, economical and effective solutions.rand with Yongzhu characteristics.