

WS 310-610/M BLU

Characteristics


- Gas burner.
- Modulating operation.
- Complies with EU standard EN676 Class 3, NOx emissions <80mg/kWh.



Power kW	Model	Article No.	Power supply	Motor power kW	Package size LxPxH(mm)	Weight kg
400/1200~3630	WS 310/M BLU	101 004 001	230V 50Hz	7.5	1820x1120x880	250
500/1500~4450	WS 410/M BLU	101 004 002	230V 50Hz	9.2	1820x1120x880	250
680/1800~5250	WS 510/M BLU	101 004 003	230V 50Hz	12	1820x1120x880	250
1000/2200~6250	WS 610/M BLU	101 004 004	230V 50Hz	15	1820x1120x880	280


*60 Hz can be customized

Size

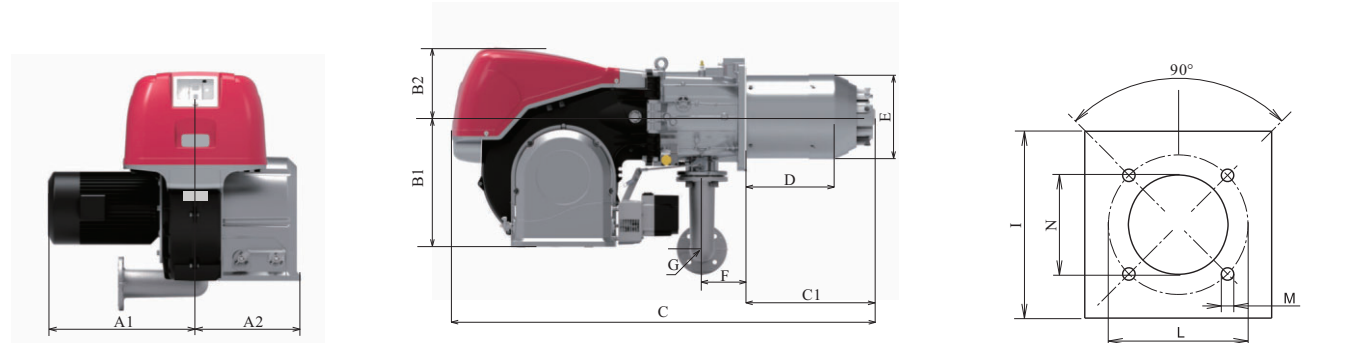

Model	A1	A2	B1	B2	C	C1	E	F	G	I	L	M	N
	mm	mm	mm	mm	mm	mm	Φmm	mm	mm	mm	Φmm	M	Φmm
WS 310/M BLU	555	400	528	275	1648	465	305	178	DN65	400	452	4*M20	335
WS 410/M BLU	555	400	528	275	1691	516	312	178	DN65	400	452	4*M20	335
WS 510/M BLU	555	400	528	275	1698	516	321	178	DN65	400	452	4*M20	335
WS 610/M BLU	555	400	528	275	1698	516	336	178	DN65	400	452	4*M20	335

Firing Rates

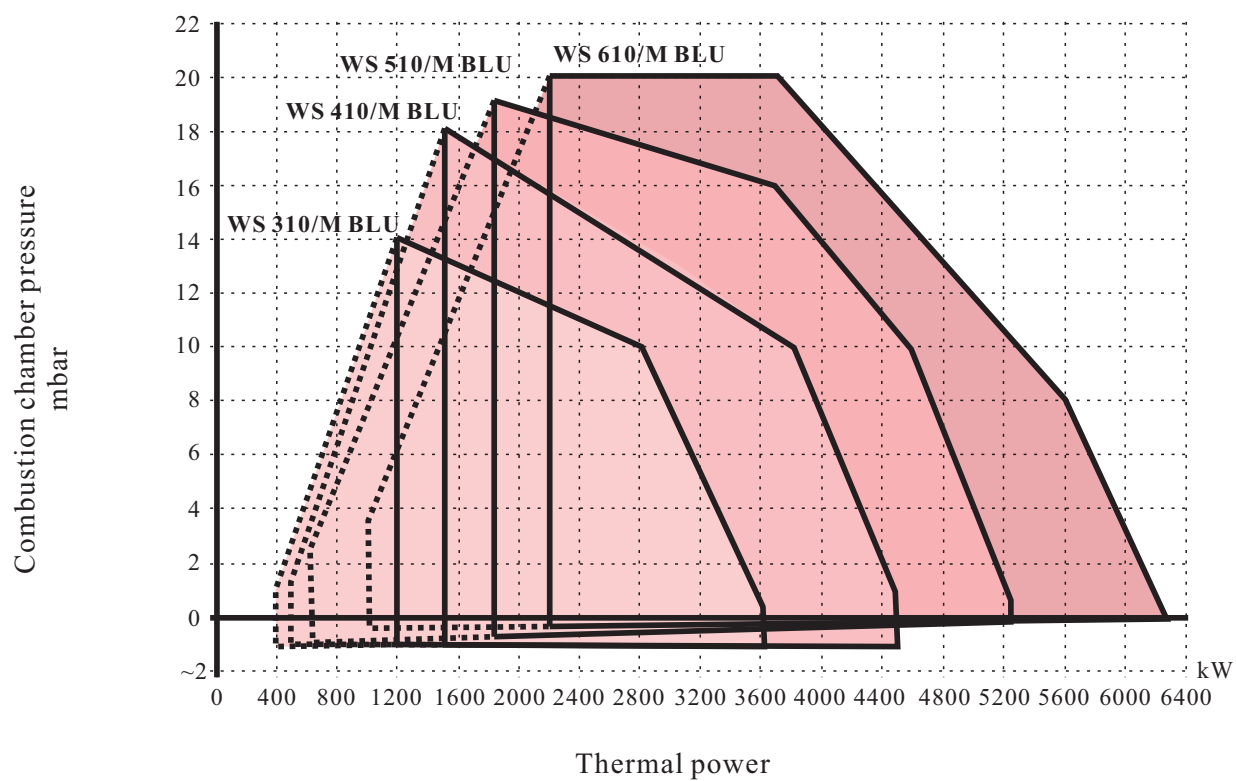

Useful firing rates for choosing the burner

Modulation range

Test condition conforming to en676

Temperature: 20°C

Pressure: 1013.5

Mbar altitude: 0 m a.s.l