




BT18/26/35L/LR单/双段火轻油燃烧器

BT18/26/35L/LR One/Two-stage Light Oil Burner

| 功率 Power (KW) | 型号 Model | 订货编号 Order number | 电源 Power supply | 电机功率 Motor power (KW) | 包装尺寸 package size (LxPxHmm) | 重量 weight (kg) |
|---------------------|-----------------|--------------------------|--------------------|-----------------------------|-----------------------------------|----------------------|
| 90~213 | BT18L | 201 20 108 | 230V 50Hz | 0.37 | 665x515x390mm | 21 |
| 154~308 | BT26L BT26LR | 201 20 109 201 20 202 | 230V 50Hz | 0.37 | 665x515x390mm | 21 22.5 |
| 178~391 | BT35L BT35LR | 201 20 111 201 20 204 | 230V 50Hz | 0.37 | 665x515x390mm | 22.5 23.5 |

外观尺寸图

Exterior dimensional drawing



锅炉开口尺寸
Boiler openness dimension

| 型号 model | A1 | A2 | B1 | B2 | C | D | E | N | I | L | M |
|-------------|-----|-----|-----|-----|-----|---------|-----|-----|-----|---------|-------|
| | mm | mm | mm | mm | mm | mm | Φmm | Φmm | Φmm | Φmm | M |
| BT18L | 215 | 248 | 253 | 93 | 620 | 105~200 | 119 | 130 | 186 | 170-210 | 4-M10 |
| BT26L | 215 | 248 | 253 | 93 | 620 | 105~200 | 138 | 145 | 186 | 170-210 | 4-M10 |
| BT26LR | 215 | 248 | 253 | 93 | 620 | 105~200 | 138 | 145 | 186 | 170-210 | 4-M10 |
| BT35L | 215 | 248 | 253 | 108 | 620 | 105~200 | 155 | 165 | 216 | 200-245 | 4-M12 |
| BT35LR | 215 | 248 | 253 | 108 | 620 | 105~200 | 155 | 165 | 216 | 200-245 | 4-M12 |

备选功能

Alternative function

加长的燃烧筒, 可定制60Hz

Extended combustion cylinder, customizable 60Hz

标准配件


standard fittings

过滤器-软管-喷嘴-与锅炉配套的组件

Filter - Hose - Nozzle - assembly for boiler

曲线图

curve graph

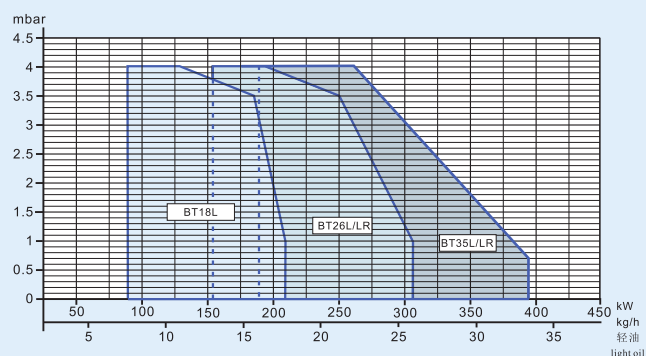

曲线图 Curve diagram