


BTN15/20/30L/LR单/双段火燃烧器

BTN15/20/30L/LR One/Two-stage Light Oil Burner

功率 Power (KW)	型号 Model	订货编号 Order number	电源 Power supply	电机功率 Motor power (KW)	包装尺寸 package size (LxPxHmm)	重量 weight (kg)
83~166	BTN15L	202 22 013	230V 50Hz	0.2	525x365x380	13
	BTN15R	202 20 020				14
118.6~216	BTN20L	202 22 014	230V 50Hz	0.2	525x365x380	13
	BTN20LR	202 20 021				14
190~310	BTN30L	202 22 015	230V 50Hz	0.25	525x365x380	14
	BTN30LR	202 20 022				14.5

外观尺寸图

Exterior dimensional drawing

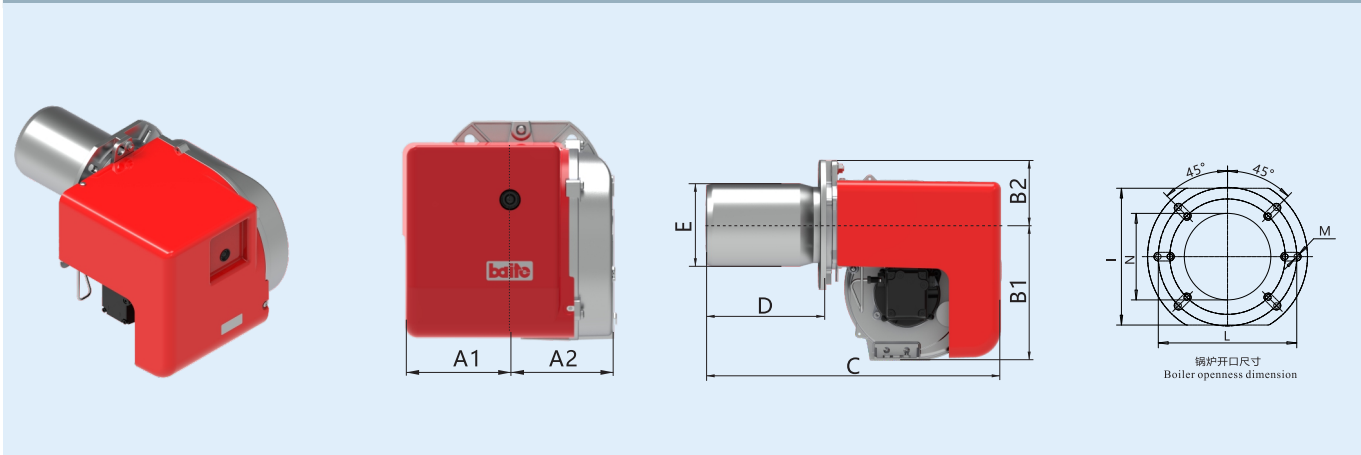

型 号 model	A1	A2	B1	B2	C	D	E	N	I	L	M
	mm	mm	mm	mm	mm	mm	Φmm	Φmm	mm	Φmm	M
BTN15L	157	137	204	98	438	162	114	124	195-220	160-190	4-M8
BTN15LR	180	155	204	98	438	162	114	124	195-220	160-190	4-M8
BTN20L	157	137	204	98	445	169	125	135	195-220	160-190	4-M8
BTN20LR	180	155	204	98	445	169	125	135	195-220	160-190	4-M8
BTN30L	157	137	204	98	445	169	125	135	195-220	160-190	4-M8
BTN30LR	180	155	204	98	445	169	125	135	195-220	160-190	4-M8

备选功能
Alternative function

加长的燃烧筒，可定制60Hz
Extended combustion cylinder, customizable 60Hz

标准配件
standard fittings

过滤器-软管-喷嘴-与锅炉配套的组件
Filter - Hose - Nozzle - assembly for boiler

