


BTN15/20/30GL单段火燃气/轻油双燃料燃烧器

BTN15/20/30GL One Stage Light Oil & Gas Dual Fuel Burner

| 功率 Power (kW) | 型号 Model | 订货编号 Article No. | 电源 Power supply | 电机功率 Motor power (kW) | 包装尺寸 package size (L*W*H:mm) | 重量 weight (kg) |
|---------------------|-------------|---------------------|--------------------|-----------------------------|------------------------------------|----------------------|
| 50~160 | BTN15GL | 202 23 013 | 230V 50Hz | 0.2 | 525X365X380 | 12 |
| 60~205 | BTN20GL | 202 23 014 | 230V 50Hz | 0.2 | 525X365X380 | 12 |
| 100~280 | BTN30GL | 202 23 015 | 230V 50Hz | 0.25 | 525X365X380 | 12.5 |

外观尺寸图

Overall dimensions

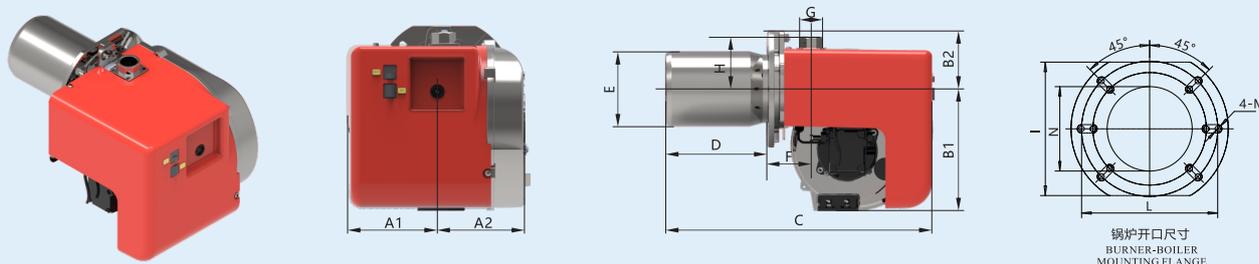

| 型号 model | A1 | A2 | B1 | B2 | C | D | E | F | G | H | I | L | N |
|-------------|-----|-----|-----|----|-----|-----|-----|----|-----|-----|---------|---------|-----|
| | mm | mm | mm | mm | mm | mm | Φmm | mm | mm | mm | mm | Φmm | Φmm |
| BTN15GL | 157 | 137 | 204 | 98 | 438 | 162 | 114 | 72 | G1" | 144 | 195-220 | 160-190 | 124 |
| BTN20GL | 157 | 137 | 204 | 98 | 445 | 169 | 125 | 72 | G1" | 144 | 195-220 | 160-190 | 135 |
| BTN30GL | 157 | 137 | 204 | 98 | 445 | 169 | 125 | 72 | G1" | 144 | 195-220 | 160-190 | 135 |

备选功能

Alternative function

加长的燃烧筒，可定制60Hz
Longer blast tube and 60HZ motor is customized.


备注

REMARK

* 阀组进口允许的最大燃气压力。
* Maximum allowable gas pressure at valve group inlet.


曲线图

curve graph

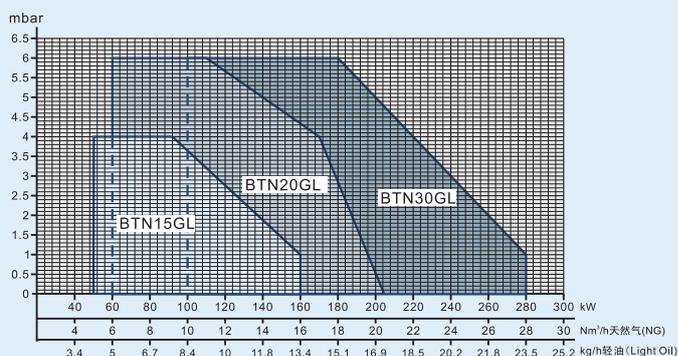

BTN15/20/30GL单段火燃气/轻油双燃料燃烧器


BTN15/20/30GL One Stage Light Oil & Gas Dual Fuel Burner

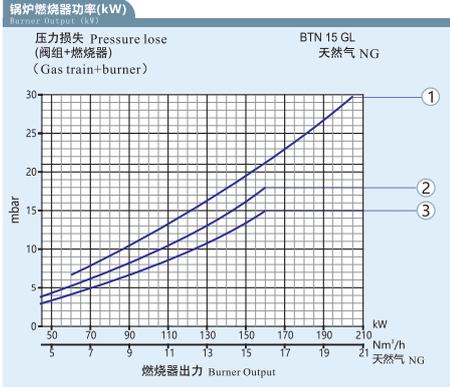

BTN15GL

天然气 natural gas


| 曲线 (型号) Curve (model) | 阀组编号 Valve group number | 检漏 Leakage control | 最大压力** Maximum pressure value (mbar) | 图号 figure number |
|-----------------------------|----------------------------|-----------------------|--|---------------------|
| ③ QF-MVDLE210/5-RC1* | 222 25 355 | - | 360 | QF1 |
| ① QF-MB-DLE405 B01 S20-RC1* | 222 25 653 | - | 360 | QF3 |
| ② QF-MB-DLE407 B01 S20-RC1* | 222 25 654 | - | 360 | QF3 |
| ③ QF-MB-DLE410 B01 S20-RC1* | 222 25 655 | - | 360 | QF3 |

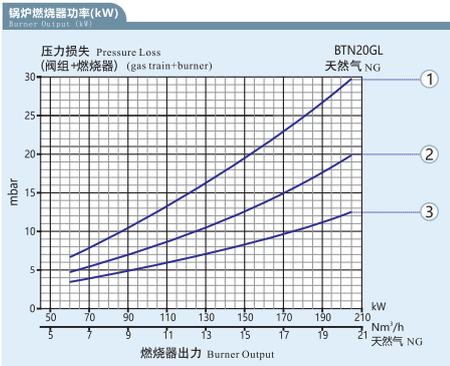

BTN20GL

天然气 natural gas

| 曲线 (型号) Curve (model) | 阀组编号 Valve group number | 检漏 Leakage control | 最大压力** Maximum pressure value (mbar) | 图号 figure number |
|-----------------------------|----------------------------|-----------------------|--|---------------------|
| ② QF-MVDLE207/5-RC1* | 222 25 354 | - | 360 | QF1 |
| ③ QF-MVDLE210/5-RC1* | 222 25 355 | - | 360 | QF1 |
| ① QF-MB-DLE405 B01 S20-RC1* | 222 25 653 | - | 360 | QF3 |
| ② QF-MB-DLE407 B01 S20-RC1* | 222 25 654 | - | 360 | QF3 |
| ③ QF-MB-DLE410 B01 S20-RC1* | 222 25 655 | - | 360 | QF3 |

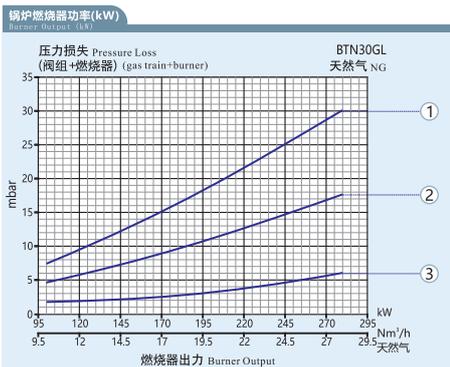

BTN30GL

天然气 natural gas

| 曲线 (型号) Curve (model) | 阀组编号 Valve group number | 检漏 Leakage control | 最大压力** Maximum pressure value (mbar) | 图号 figure number |
|-----------------------------|----------------------------|-----------------------|--|---------------------|
| ② QF-MVDLE207/5-RC1* | 222 25 354 | - | 360 | QF1 |
| ③ QF-MVDLE210/5-RC1* | 222 25 355 | - | 360 | QF1 |
| ① QF-MB-DLE405 B01 S20-RC1* | 222 25 653 | - | 360 | QF3 |
| ② QF-MB-DLE407 B01 S20-RC1* | 222 25 654 | - | 360 | QF3 |
| ③ QF-MB-DLE410 B01 S20-RC1* | 222 25 655 | - | 360 | QF3 |