


BTN40/55GC/E BLU 低氮燃气燃烧器

BTN40/55GC/E BLU Low NOx Gas Burner

功率 Power (kW)	型号 Model	订货编号 Article No.	电源 Power supply	电机功率 Motor power (kW)	包装尺寸 package size (L*W*H/mm)	重量 weight (kg)
45~370	BTN40GC BLU	203 22 040	230V 50Hz	0.45	645x600x465	28.5
	BTN40GE BLU	203 22 041				
72~480	BTN55GC BLU	203 22 055	230V 50Hz	0.45	645x600x465	28.5
	BTN55GE BLU	203 22 056				
45~370	BTN40GC BLU-TL	203 22 408	230V 50Hz	0.45	645x600x465	28.5
	BTN40GE BLU-TL	203 22 421				
72~480	BTN55GC BLU-TL	203 22 411	230V 50Hz	0.45	645x600x465	28.5
	BTN55GE BLU-TL	203 22 422				

外观尺寸图
Overall dimensions

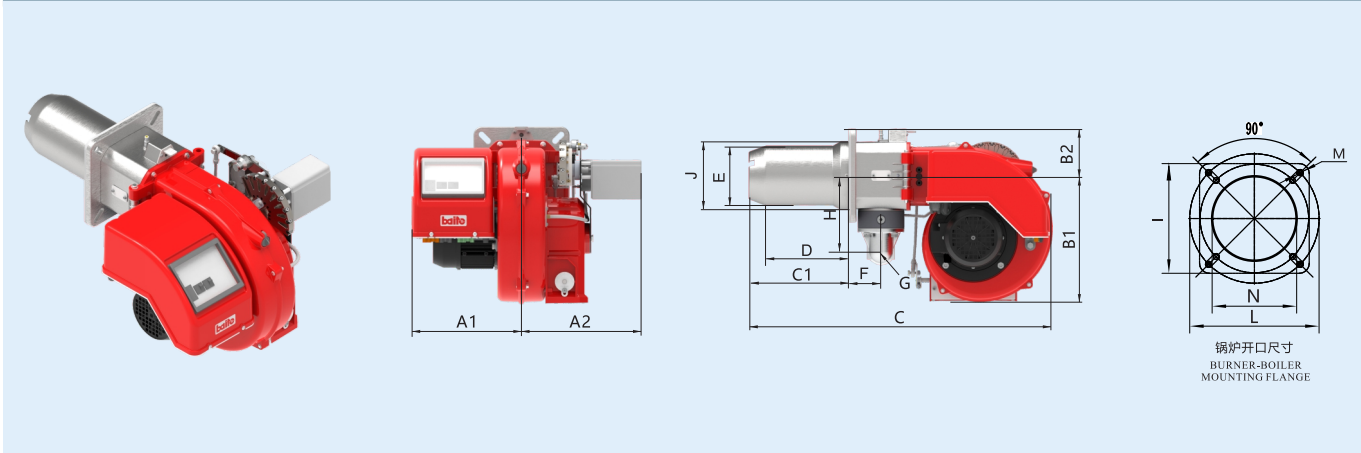

型 号 model	A1	A2	B1	B2	C	C1	D	E	F	G	H	I	L	M	N	J
	mm	mm	mm	mm	mm	mm	mm	Φmm	mm	mm	mm	mm	Φmm	M	Φmm	Φmm
BTN40GC BLU	253	276	300	110	713	230	197	140	77	G1½"	178	220	218-260	4-M10	170	161
BTN40GE BLU	253	207	300	110	713	230	197	140	77	G1½"	178	220	218-260	4-M10	170	161
BTN40GC BLU-TL	253	276	300	110	837	354	321	140	77	G1½"	178	220	218-260	4-M10	170	161
BTN40GE BLU-TL	253	207	300	110	837	354	321	140	77	G1½"	178	220	218-260	4-M10	170	161
BTN55GC BLU	253	276	300	110	713	230	197	140	77	G1½"	178	220	218-260	4-M10	170	161
BTN55GE BLU	253	207	300	110	713	230	197	140	77	G1½"	178	220	218-260	4-M10	170	161
BTN55GC BLU-TL	253	276	300	110	837	354	321	140	77	G1½"	178	220	218-260	4-M10	170	161
BTN55GE BLU-TL	253	207	300	110	837	354	321	140	77	G1½"	178	220	218-260	4-M10	170	161

备选功能 Alternative function

加长的燃烧筒，可定制60Hz
Longer blast tube and 60HZ motor is customized.

使用LPG燃气时，需在燃烧头上安装该特殊组件
When using LPG gas, this special component is installed on the burner

阀组-与锅炉配套的组件
Valve block - Component for boiler


比例调节功能 Proportional control function

另外订购比例仪RWF40或DC1020与调节组件，燃烧器即可实现比例调节运行。
In addition, order the proportioner RWF40 or DC1020 and the regulating assembly, and the burner can be proportionally regulated.

备注 remark


配有空气关闭装置。
Equipped with air closing device.

曲线图 curve graph

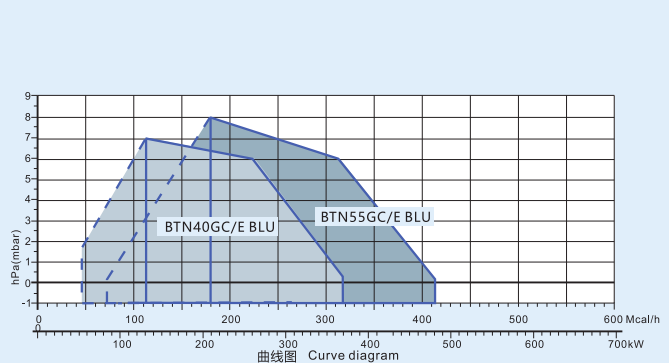


BTN40/55GC/E BLU 低氮燃气燃烧器

BTN40/55GC/E BLU Low NOx Gas Burner

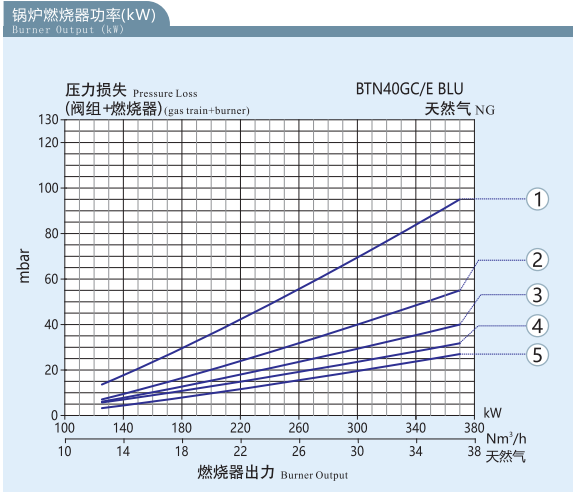

BTN40GC/E BLU					天然气 natural gas
曲线 (型号) Curve (model)	阀组编号 Valve group number	检漏 Leakage control	最大压力** Maximum pressure value (mbar)	图号 figure number	
② QF-MVDLE210/5-RC1 1/2"	222 25 357	-	360	QF1	
④ QF-MVDLE215/5-RC1 1/2"	222 25 358	-	200	QF1	
⑤ QF-MVDLE220/5-RC1 1/2"	222 25 359	-	200	QF1	
① QF-MB-DLE407 B01 S20-RC1 1/2"	222 25 656	-	360	QF3	
② QF-MB-DLE410 B01 S20-RC1 1/2"	222 25 657	-	360	QF3	
③ QF-MB-DLE412 B01 S20-RC1 1/2"	222 25 658	-	360	QF3	
④ QF-MB-DLE415 B01 S20-RC1 1/2"	222 25 659	-	360	QF3	

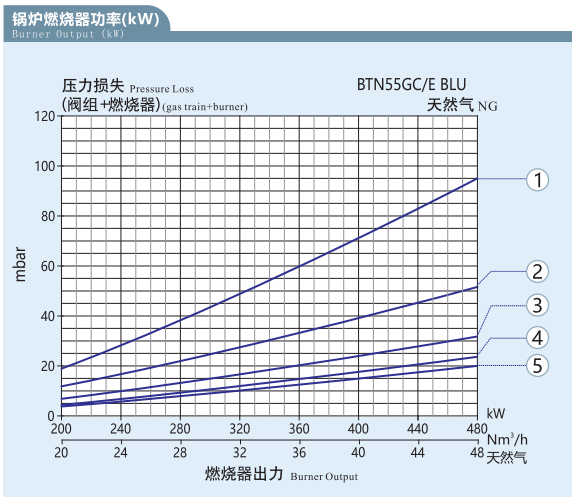

BTN55GC/E BLU					天然气 natural gas
曲线 (型号) Curve (model)	阀组编号 Valve group number	检漏 Leakage control	最大压力** Maximum pressure value (mbar)	图号 figure number	
② QF-MVDLE210/5-RC1 1/2"	222 25 357	-	360	QF1	
④ QF-MVDLE215/5-RC1 1/2"	222 25 358	-	200	QF1	
⑤ QF-MVDLE220/5-RC1 1/2"	222 25 359	-	200	QF1	
① QF-MB-DLE407 B01 S20-RC1 1/2"	222 25 656	-	360	QF3	
② QF-MB-DLE410 B01 S20-RC1 1/2"	222 25 657	-	360	QF3	
③ QF-MB-DLE412 B01 S20-RC1 1/2"	222 25 658	-	360	QF3	
④ QF-MB-DLE415 B01 S20-RC1 1/2"	222 25 659	-	360	QF3	