


BX25/40G/GE全预混表面燃烧超低氮燃气燃烧器

BX25/40G/GE Full Premix Surface Combustion Extremely Low NOx Burner

功率 Power (KW)	型号 Model	订货编号 Article No.	电源 Power supply	电机功率 Motor power (KW)	包装尺寸 package size (L*W*H/mm)	重量 weight (kg)
170 ~ 300	BX25G	202 22 119	230V 50Hz	0.45	740x430x465 1020x270x260	36.5
170 ~ 300	BX25GE	202 22 133	230V 50Hz	0.45	/ /	36.5
200 ~ 400	BX40G	202 22 120	230V 50Hz	0.45	740x430x465 1020x270x260	49
120 ~ 400	BX40GE	202 22 127	230V 50Hz	0.45	/ /	49

外观尺寸图

Overall dimensions

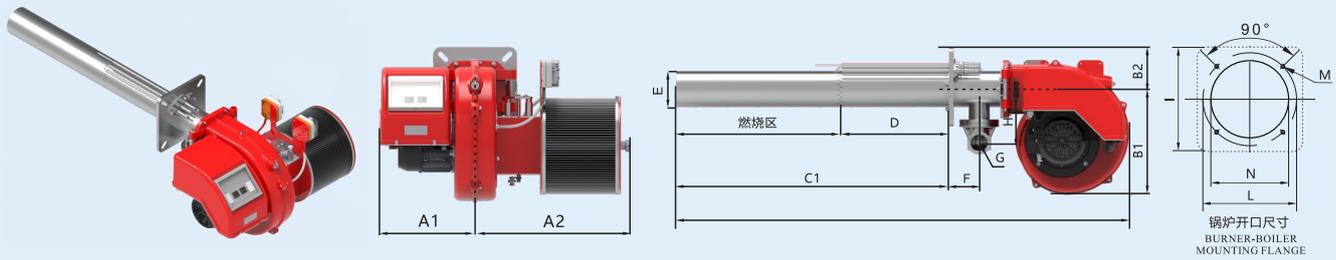

型号 model	A1	A2	B1	B2	C	C1	D	E	F	G	H	I	L	M	N
	mm	mm	mm	mm	mm	mm	mm	Φmm	mm	mm	mm	mm	Φmm	M	Φmm
BX25G	255	415	297	117	1135	630	300	100	84	G1½"	152	220.5	218-260	4-M10	140
BX25GE	255	415	297	117	1135	630	300	100	84	G1½"	192	220.5	218-260	4-M10	140
BX40G	255	415	297	117	1270	765	300	100	84	G1½"	152	220.5	218-260	4-M10	140
BX40GE	255	415	297	117	1270	765	300	100	84	G1½"	192	220.5	218-260	4-M10	140

备选功能

Alternative function

加长的燃烧筒，可定制60Hz

Can lengthen the blast tube, Can books the 60Hz.

使用LPG燃气时，需在燃烧头上安装该特殊组件

When using LPG gas, this special component is installed on the burner

阀组-与锅炉配套的组件

Valve block - Component for boiler

比例调节功能


Proportional control function

另外订购比例仪RWF40或DC1020与调节组件，燃烧器即可实现比例调节运行。

In addition, order the proportioner RWF40 or DC1020 and the regulating assembly, and the burner can be proportionally regulated.

曲线图

curve graph

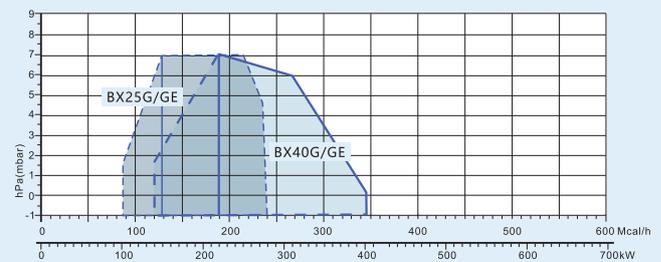


曲线图 Curve diagram

BX25/40G/GE全预混表面燃烧超低氮燃气燃烧器

BX25/40G/GE Full Premix Surface Combustion Extremely Low NOx Burner

锅炉燃烧器功率(kW)

Burner Output (kW)

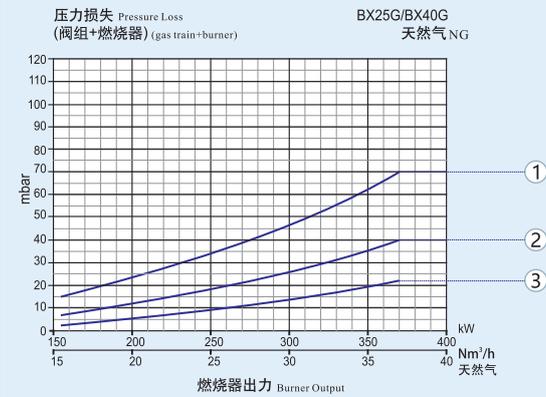


BX25G/BX40G

天然气 natural gas

曲线 (型号) Curve (model)	阀组编号 Valve group number	检漏 Leakage control	最大压力** Maximum pressure value (mbar)	图号 figure number
① QF-MVDLE207/5-RC1 1/2"	222 25 356	-	360	QF1
② QF-MVDLE210/5-RC1 1/2"	222 25 357	-	360	QF1
③ QF-MVDLE215/5-RC1 1/2"	222 25 358	-	360	QF1
① QF-MB-DLE407 B01 S20-RC1 1/2"	222 25 656	-	360	QF3
② QF-MB-DLE410 B01 S20-RC1 1/2"	222 25 657	-	360	QF3
③ QF-MB-DLE415 B01 S20-RC1 1/2"	222 25 659	-	360	QF3

锅炉燃烧器功率(kW)

Burner Output (kW)

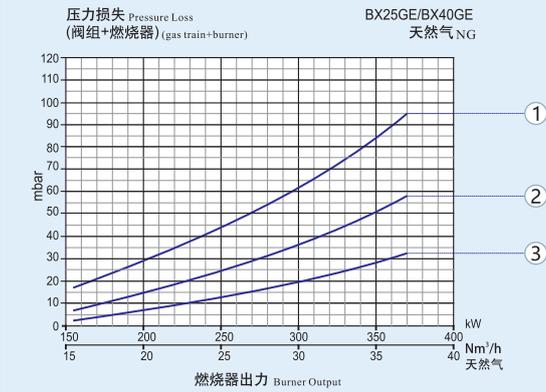

BX25GE/BX40GE

天然气 natural gas

曲线 (型号) Curve (model)	阀组编号 Valve group number	检漏 Leakage control	最大压力** Maximum pressure value (mbar)	图号 figure number
① QF-MVDLE207/5-RC1 1/2"	222 25 356	-	360	QF1
② QF-MVDLE210/5-RC1 1/2"	222 25 357	-	360	QF1
③ QF-MVDLE215/5-RC1 1/2"	222 25 358	-	360	QF1
① QF-MB-DLE407 B01 S20-RC1 1/2"	222 25 656	-	360	QF3
② QF-MB-DLE410 B01 S20-RC1 1/2"	222 25 657	-	360	QF3
③ QF-MB-DLE415 B01 S20-RC1 1/2"	222 25 659	-	360	QF3