

SUDICK

XT-15□□ Series

Technical parameters:

Input: 220V ≤ 0.25 A 50Hz

Output: One Pole: 1× 12KV Two Pole: 2×7.5KV


Outline size: 63.5×86×38 mm

Ignition distance: 3~5 mm

3-Minute ignition efficiency: XT-15□33%, XT-15□L100%

Output type: One pole and Two pole. XT-15A is Two pole output, suitable for fuel ignition; XT-15B is One pole output, with the low-potential point of the high-voltage end directly grounded via the power wire dual-color wire, suitable for gas ignition.

Diagram or description:

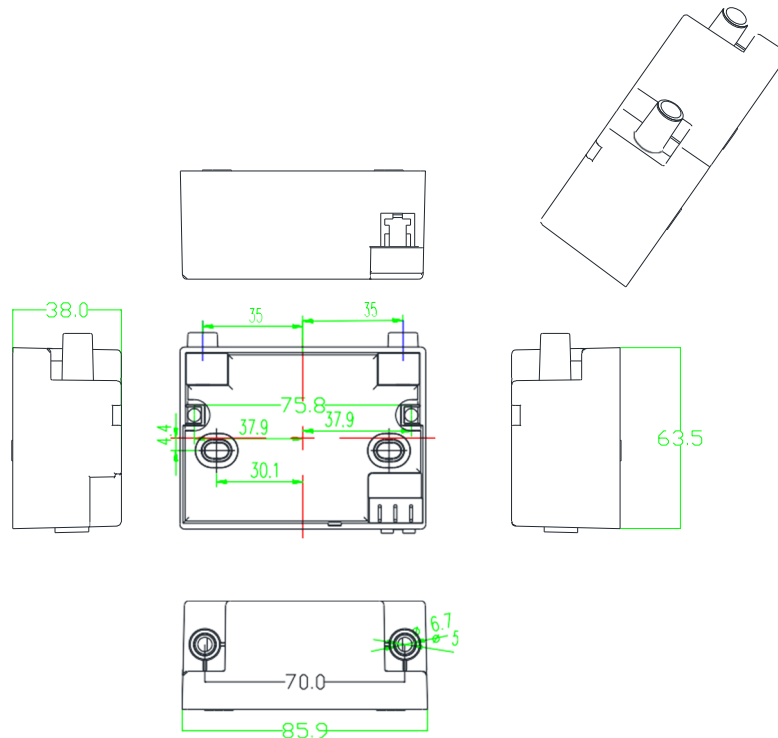

Precautions: Ensure the input dual-color wire is well grounded during use.